



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



User's Guide

NHD-3.5-320240YF-ATXL#

LCM

(Liquid Crystal Display Module)

For product support, contact

Newhaven Display International
2511 Technology Drive, #101
Elgin, Illinois 60123

Tel: (847) 844-8795 Fax: (847) 844-8796

February 11, 2009

CONTENTS

ITEM	PAGE
Cover	1
Content	2
Version Record	3
General Specification	4
Absolute Maximum Rating	5
Electrical Characteristic	5
Electro-Optical characteristics	5
Interface Pin Assignment	6
Interface Pin Assignment	7
Lcd Module Drawing	8
Packing	9

LCD Module Specification

General Specification

Item	Standard	Unit
No. of Pixels	320(RGB)*240	DOTS
Outline Size	76.9*63.8*3.3	mm
Viewing Area	72.88(W)*55.4(H)	mm
Active Area	70.08(W)*52.56(H)	mm
Pixel Size	0.073(W)*0.212(H)	mm
Pixel Pitch	0.219(W)*0.219(H)	mm
Viewing Direction	12 O'clock	--
LCD Type	TFT、Positive、Transmissive	--
Controller	HX8238	--
LCM	COG	--

LCD Module Specification

Absolute Maximum Ratings

Item		Symbol	Min.	Typ	Max.	Unit
Operating Temp		T _{OP}	-20	-	+70	°C
Storage Temp		T _{ST}	-30	-	+80	°C
Input Voltage		AV _{DD}	-0.3		+5.0	V
Power Supply for Logic	HX8238 HX8615	V _{DD}	-0.3	2.2	+2.7	V

Electrical Characteristic

Item	Symbol	Min.	Typ	Max.	Unit
Power Supply for Logic	V _{DD} -V _{SS}	1.8	--	2.5	V
TFT Driving voltage	V _{GH}	--	15.0	--	V
	V _{GL}		-10		
TFT Common Voltage	V _{COMH}	2.5		4	V
	V _{COML}	-1.5		0	
Input High Voltage	V _{IH}	0.7V _{dd}	--	V _{dd}	V
Input Low Voltage	V _{IL}	0	--	0.3V _{dd}	V
Output High Voltage	V _{OH}	0.8V _{dd}	--	V _{dd}	V
Output Low Voltage	V _{OL}	0	--	0.2V _{dd}	V
Current Consumption	I _{DD}	--	--	13	mA

Electric-Optical characteristics(FSTN)

Item	Symbol	Condition	Min.	Typ	Max.	Unit
Viewing angle(V)	θ	CR ≥ 2	15	--	35	Deg
Viewing angle(H)	Ψ	CR ≥ 2	45	--	45	Deg
Contrast	Cr	--	150	200	--	--
Response Time	t _r	T _a =25°C	--	15	30	ms
	t _d	T _a =25°C	--	35	50	ms

LCD Module Specification


Interface Pin Assignment

Pin No.	Pin Out	Signal	Description
1,2	VBL-	I	Backlight power connect with ground
3,4	VBL+	I	Backlight power supply +19.6V
5,6	NC	NC	No connection
7	POL	O	Polarity for select for the line inversion control signal
8	RESET	I	Reset
9	SPENA	I	Serial Port Data Enable Signal. Normally pull high
10	SPCLK	I	Serial Port Clock. Normally pull high
11	SPDAT	I/O	Data signal of serial connection
12	B0	I	Data bus of parallel connection B
13	B1	I	Data bus of parallel connection B
14	B2	I	Data bus of parallel connection B
15	B3	I	Data bus of parallel connection B
16	B4	I	Data bus of parallel connection B
17	B5	I	Data bus of parallel connection B
18	B6	I	Data bus of parallel connection B
19	B7	I	Data bus of parallel connection B
20	G0	I	Data bus of parallel connection G
21	G1	I	Data bus of parallel connection G
22	G2	I	Data bus of parallel connection G
23	G3	I	Data bus of parallel connection G
24	G4	I	Data bus of parallel connection G
25	G5	I	Data bus of parallel connection G
26	G6	I	Data bus of parallel connection G
27	G7	I	Data bus of parallel connection G
28	R0	I	Data bus of parallel connection R
29	R1	I	Data bus of parallel connection R
30	R2	I	Data bus of parallel connection R
31	R3	I	Data bus of parallel connection R
32	R4	I	Data bus of parallel connection R
33	R5	I	Data bus of parallel connection R
34	R6	I	Data bus of parallel connection R
35	R7	I	Data bus of parallel connection R
36	HSYNC	O	OSD Hsync output signal
37	VSYNC	O	OSD Vsync output signal
38	DCLK	O	OSD Clock Signal
39,40	AVDD	I	Analog power supply (2.5V~3.6V)
41,42	DVDD	I	Digital power supply (1.8V~2.5V)

LCD Module Specification

43,44	NC		No connection
45	VGL	I	Driving Voltage
46	NC		No connection
47	VGH	I	Driving Voltage
48,49,50	NC		No connection
51	VCOM	I	Driving Voltage
52	ENB	I	Data enable signal
53,54	GND	I	Ground

REV	DESCRIPTION:	DATE
A00	First issue	Jul-25-2006

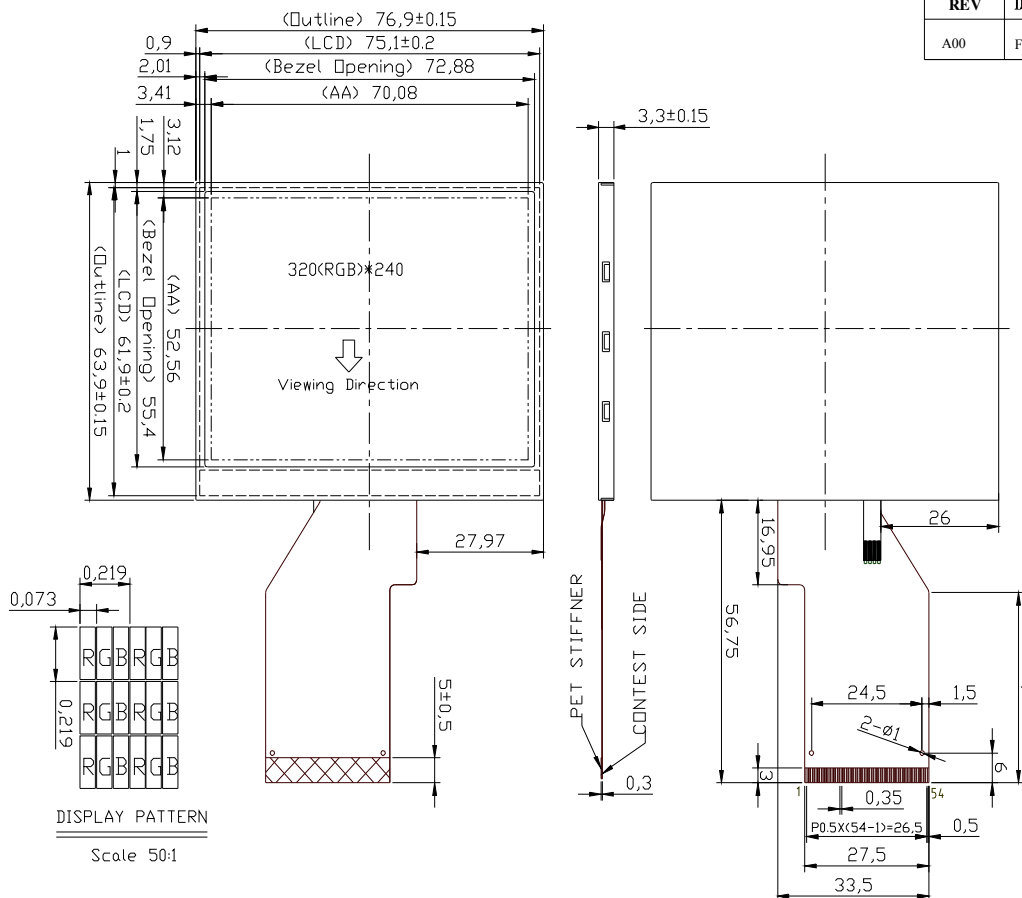


PIN Table

PIN	NAME	PIN	NAME
1, 2	CA-LED	↓	↓
3, 4	AN-LED	35	D07<DATA23>
5	NC	36	IHS<HSYNC>
6	NC	37	IVS<VSYNC>
7	POL<M>	38	CLK<DOTCLK>
8	NRESET	39, 40	AVDD
9	SPEN<CS>	41, 42	DVDD
10	SPCK<SCL>	43	NC
11	SPDA<SDI>	44, 45	VGL
12	D20<DATA0>	46	NC
↓	↓	47	VGH
19	D27<DATA7>	48	NC
20	D10<DATA8>	49	NC
↓	↓	50, 51	VCOM
27	D17<DATA15>	52	DEN<ENABLE>
28	D00<DATA16>	53, 54	GND

Specification:

- 1). Driving: conditions: VDD:3.0V
Driving condition: 1/240 Duty
- 2). ViewingDirection: 12 O'clock
- 3). Display mode: TFT/16777K Color/Transmissive
- 4). Operating temp.: -10~60° C Storage temp.: -20~70° C
- 5). IC: Source Driver: HX8218A Gate Driver : HX8615A
- 6). Backlight: LED Back-light/ White color

SCALE: FIT			PART NO: HT035-01MD
SHEET: 01-OF-01			
GENERAL TOL: ±0.2	UNIT mm		
APPROVALS	DATE		
APP:			
CHK:			
DWN:			

