



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Oven Controlled Crystal Oscillator NI-10 MHz-2800 series

2800 Series in 36.3x27.2mm DIP package

NI-10M-2800 series oscillators is designed for applications where space is at a premium and good frequency stability is required. The oscillators can be used in many communications applications. A choice of quartz resonators offers a variety of performance versus cost options to fit most applications.



RoHS Compliant Standard

ELECTRICAL SPECIFICATIONS

1. OUTPUT (PIN = "R.F. OUTPUT")

	Parameter	Min.	Typ.	Max.	Unit	Test Condition
1.1.	Frequency	10.000000			MHz	
1.2.	Initial Accuracy	-0.1		+0.1	ppm	@ +25 ±1°C after turn on power 15 ±1 minutes ≤ 90 days following date code VCO Input at 2.5 ±0.001V
1.3.	Waveform	Rectangular				
1.4.	Level	LVTTTL				
	"1" level	+2.6			V	
	"0" level			+0.4	V	
1.5.	Load	13.5	15	16.5	pF	
1.6.	Duty cycle	45	50	55	%	@ +1.65V
1.7.	Rise/fall time			6	ns	10% to 90%
1.8.	Spurious			-60	dBc	

2. FREQUENCY STABILITY

	Parameter	Min.	Typ.	Max.	Unit	Test Condition
2.1.	Ambient	±3, ±5, ±10			ppb	referenced to 25°C Refer to Table 1 : Ordering Information
		-30 ~ +70			°C	
		-40 ~ +85				
2.2.	Aging	-0.5		+0.5	ppb	per day, at time of shipment
	Daily	-0.5		+0.5	ppb	after 30 days
	Yearly	-50		+50	ppb	
	10 Years	-0.3		+0.3	ppm	
2.3.	Voltage	-0.5		+0.5	ppb	±5% change
2.4.	Short term			0.05	ppb/s	root Allan variance
2.5.	Load	-0.5		+0.5	ppb	±5% change
2.6.	Warm-up	-10		+10	ppb	in 10 minutes @ +25 ±1°C referenced to 1 hour

	Parameter	Min.	Typ.	Max.	Unit	Test Condition
2.7.	Phase Noise		-95	-90	dBc/Hz	@ 1Hz
			-125	-120	dBc/Hz	@ 10Hz
			-140	-135	dBc/Hz	@ 100Hz
			-148	-145	dBc/Hz	@ 1KHz
			-156	-155	dBc/Hz	@ 10KHz
			-158	-155	dBc/Hz	@ 100KHz

3. ELECTRICAL FREQUENCY ADJUSTMENT (PIN = "VCO INPUT")

	Parameter	Min.	Typ.	Max.	Unit	Test Condition
3.1.	Tuning Range			-0.5	ppm	VCO @ 0V
		+0.5			ppm	VCO @ 5V
3.2.	Control Voltage	0		+5.0	V	Referenced to frequency at nominal Center Voltage
3.3.	Slope	Positive				
3.4.	Center Voltage		+2.5		V	Note 1
3.5.	Linearity	-10		+10	%	
3.6.	Input Impedance	100			kΩ	

4. INPUT POWER (PIN = "+VDC")

	Parameter	Min.	Typ.	Max.	Unit	Test Condition
4.1.	Voltage	+11.4	+12	+12.6	V	
4.2.	Current			400	mA	@ turn on
4.3.	Steady State			1.3	W	@ +25°C

5. REFERENCE VOLTAGE (PIN = "REFERENCE VOLTAGE")

(Optional Function. Refer to Table 1 : Ordering Information.)

	Parameter	Min.	Typ.	Max.	Units	Test Condition
5.1.	Voltage	+4.75	+5	+5.25	V	Over temperature range in 2.1.
5.2.	Load	9			kΩ	

6. ENVIRONMENTAL


	Parameter	Reference Std.	Test Condition
6.1.	Operating Temperature	-40°C to +85°C	Note 2
6.2.	Storage Temperature	-55°C to +105°C	
6.3.	Humidity	MIL-STD-202, Method 103 Test Condition A	95% RH @ +40°C, non-condensing, 240 hours
6.4.	Vibration (non-operating)	MIL-STD-202, Method 201	0.06" Total p-p, 10 to 55 Hz
6.5.	Shock (non-operating)	MIL-STD-202, Method 213, Test Condition J	30g, 11ms, half-sine

Note 1. When not connected, VCO INPUT is internally held at this voltage.


Note 2. Output maintained over this temperature range. Other requirements of this specification may not be met when operating outside the temperature range in 2.1.

Table 1 : ORDERING INFORMATION



Temp. (°C)	TAITIEN Model No.	ppb	±3	±5	±10	Control Voltage	Reference Voltage
-30~+70			NI-10M-2800	NI-10M-2801	NI-10M-2802	+2.5V	N/A
-40~+85			NI-10M-2803	NI-10M-2804	NI-10M-2805		
-30~+70			NI-10M-2850	NI-10M-2851	NI-10M-2852	+2.5V	+5.0V
-40~+85			NI-10M-2853	NI-10M-2854	NI-10M-2855		

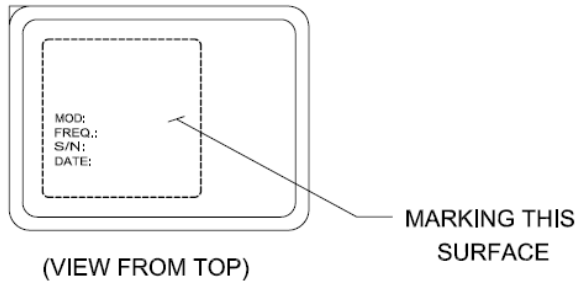OUTLINE DRAWING


PIN CONNECTIONS	
PIN	FUNCTION
1	VCO INPUT
2 (See Note 1)	REFERENCE VOLTAGE or NOT CONNECTED
3	+VDC
4	R. F. OUTPUT
5	0 VOLTS & CASE

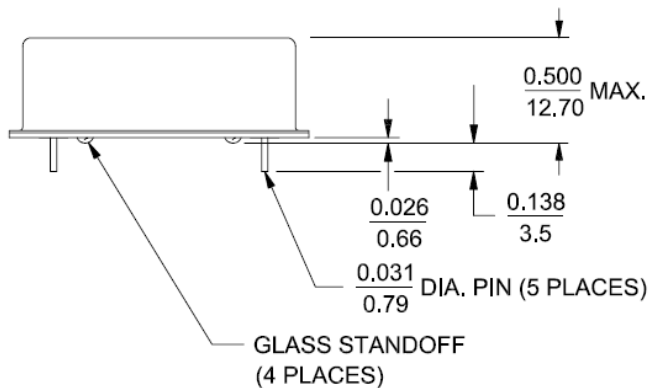
Note:

- For NI-10M-2800 THRU NI-10M-2805 NOT internally CONNECTED.

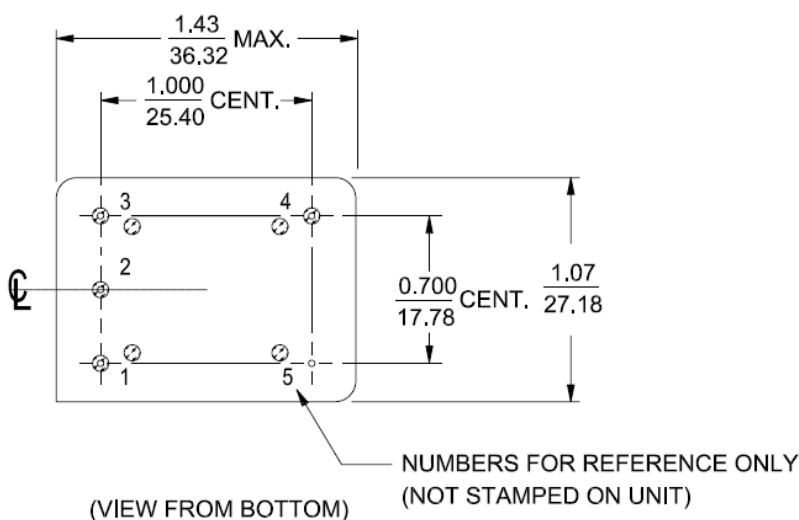

TOLERANCES:
UNLESS OTHERWISE SPECIFIED:
ANGLES: ±1 DEGREE
FRACTIONS: ±1/32 INCH
DECIMALS: .XX±.015, .XXX±.010 INCH
INCH
mm (REFERENCE ONLY)