



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# SINGLE SUPPLY QUAD COMPARATOR

## ■ GENERAL DESCRIPTION

The NJM12901 is single-supply quad voltage comparator, which can operate from 2V supply. The features are low input offset voltage, low input bias current and low current consumption. The NJM12901 compare the input signal to 0V ( ground ) due to the Darlington PNP input stage.

The package lineup is DIP, DMP and others compact, so that the NJM12901 is suitable for any kind of signal comparator.


## ■ PACKAGE OUTLINE

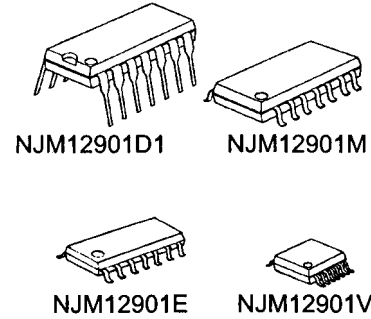

## ■ FEATURES

- Operating Voltage ( +2V~+14V )
- Open Collector Output
- Bipolar Technology
- Package Outline DIP14,DMP14,EMP14,SSOP14


## ■ PIN CONFIGURATION

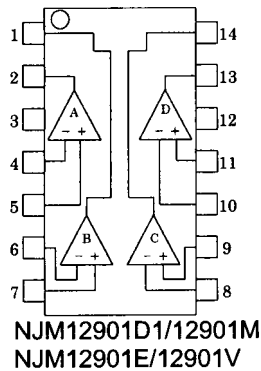

### PIN FUNCTION

- |                  |             |
|------------------|-------------|
| 1.B OUTPUT       | 8.C -INPUT  |
| 2.A OUTPUT       | 9.C +INPUT  |
| 3.V <sup>+</sup> | 10.D -INPUT |
| 4.A -INPUT       | 11.D +INPUT |
| 5.A +INPUT       | 12.GND      |
| 6.B -INPUT       | 13.D OUTPUT |
| 7.B +INPUT       | 14.C OUTPUT |

## ■ EQUIVALENT CIRCUIT ( 1/4 Shown )

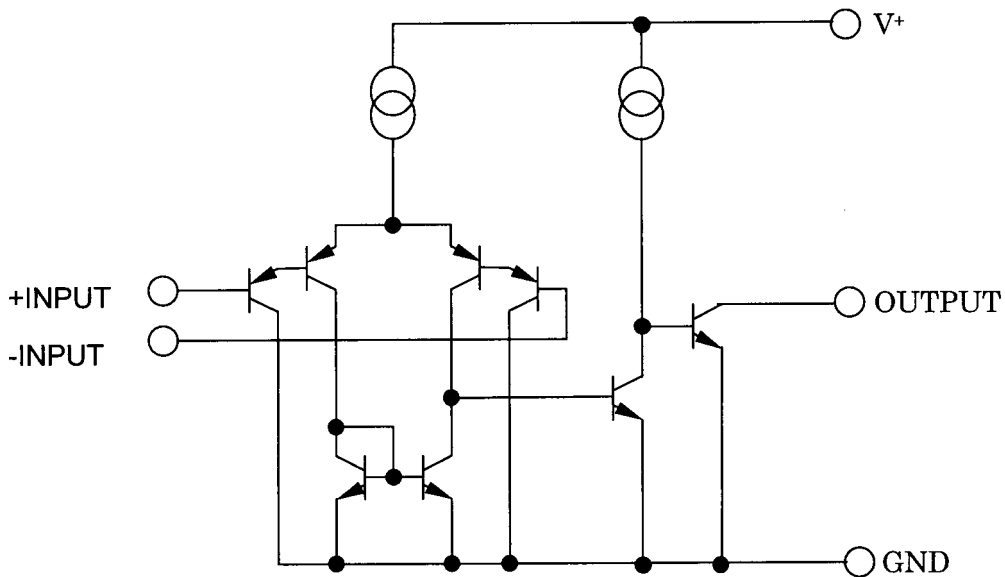

# NJM12901

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+$	15	V
Differential Input Voltage	$V_{ID}$	14	V
Input Voltage	$V_{IC}$	-0.3~+14	V
Power Dissipation	$P_D$	( DIP14 ) 700 ( DMP14 ) 300 ( EMP14 ) 300 ( SSOP14 ) 300	mW
Operating Temperature Range	$T_{opr}$	-40~+85	°C
Storage Temperature Range	$T_{stg}$	-50~+125	°C


## ■ ELECTRICAL CHARACTERISTICS

(  $V^+=5V, Ta=25^\circ C$  )


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	$V_{opr}$		2	-	14	V
Input Offset Voltage	$V_{IO}$	$R_S=0\Omega, V_O=1.4V$	-	1	4	mV
Input Offset Current	$I_{IO}$		-	5	50	nA
Input Bias Current	$I_B$		-	30	200	nA
Input Common Mode Voltage Range	$V_{ICM}$		0~3.5	-	-	V
Large Signal Voltage Gain	$A_V$	$R_L=15k\Omega$	-	106	-	dB
Response Time	$t_R$	$R_L=5.1k\Omega$	-	0.5	-	$\mu s$
Output Sink Current	$I_{SINK}$	$V_{IN}^-=1V, V_{IN}^+=0V, V_O=1.5V$	6	10	-	mA
Output Saturation Voltage	$V_{SAT}$	$V_{IN}^-=1V, V_{IN}^+=0V, I_{SINK}=3mA$	-	80	300	mV
Leakage Current	$I_{LEAK}$	$V_{IN}^-=0V, V_{IN}^+=1V, V_O=5V$	-	0.1	1.0	$\mu A$
Operating Current	$I_{CC}$	$R_L=\infty$	-	0.8	1.8	mA

## ■ TYPICAL CHARACTERISTICS


NJM12901 Operating Current vs. Operating Voltage

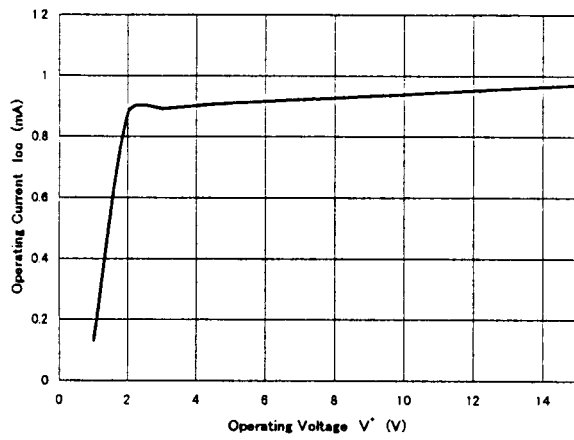


NJM12901 Output Saturation Voltage vs. Output sink Current

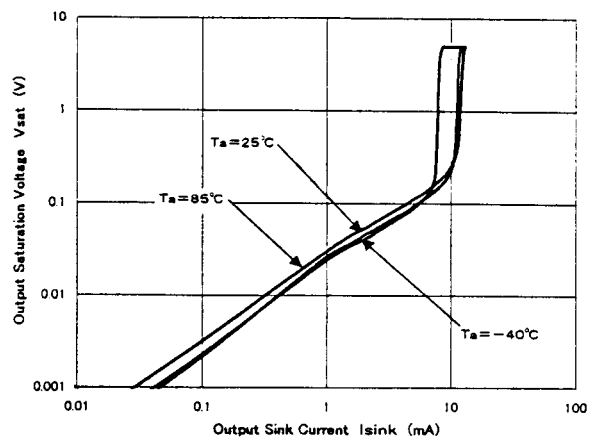


NJM12901 Input Offset Voltage vs. Operating Voltage

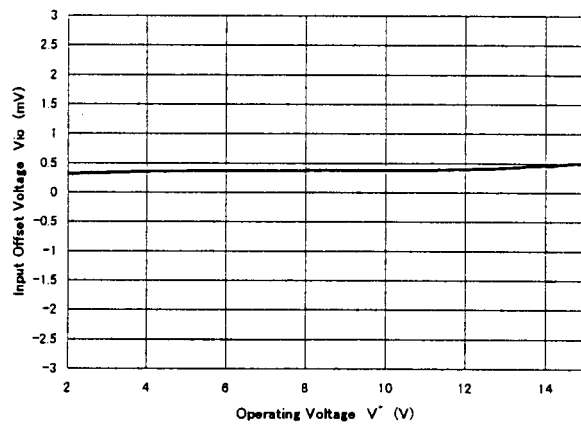


NJM12901 Input Bias Current vs. Operating Voltage

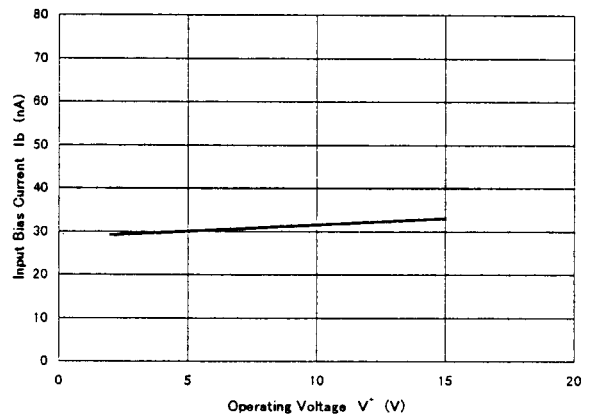

NJM12901 Output Saturation Voltage vs. Operating Voltage

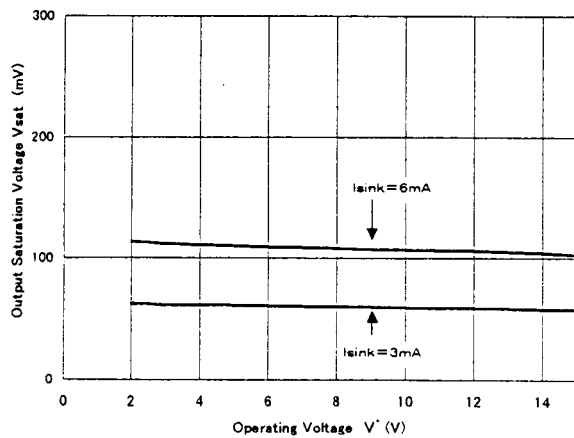


NJM12901 Input Common Mode Voltage Range

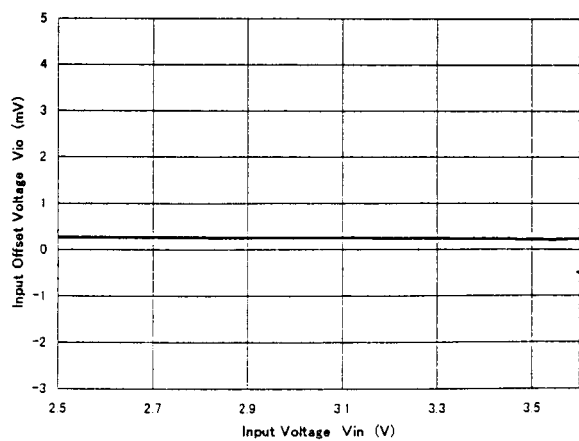


# NJM12901

## ■ TYPICAL CHARACTERISTICS


NJM12901 Operating Current vs. Temperature

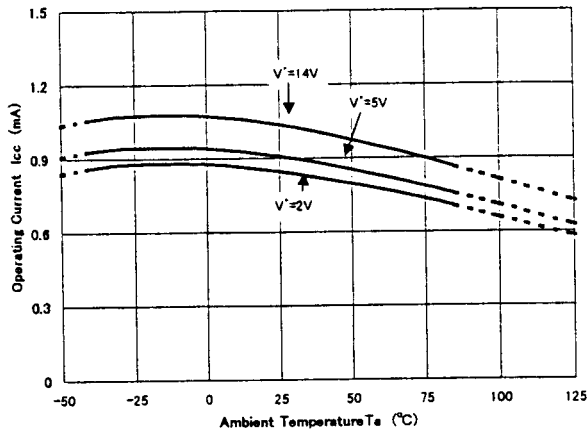


NJM12901 Input Bias Current vs. Temperature

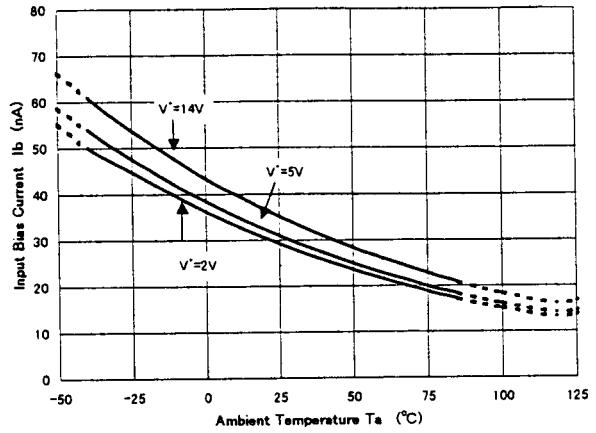


NJM12901 Input Offset Voltage vs. Temperature

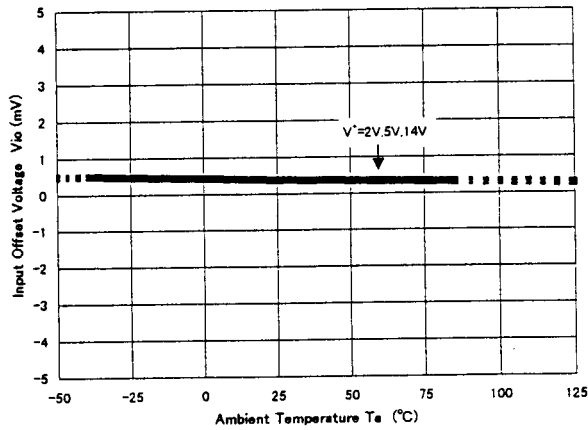


NJM12901 Output Saturation Voltage vs. Temperature  
( $I_{sink}=3mA$ )

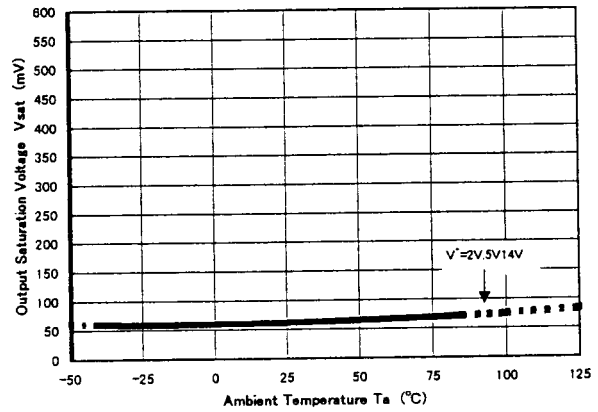

NJM12901 Pulse Response

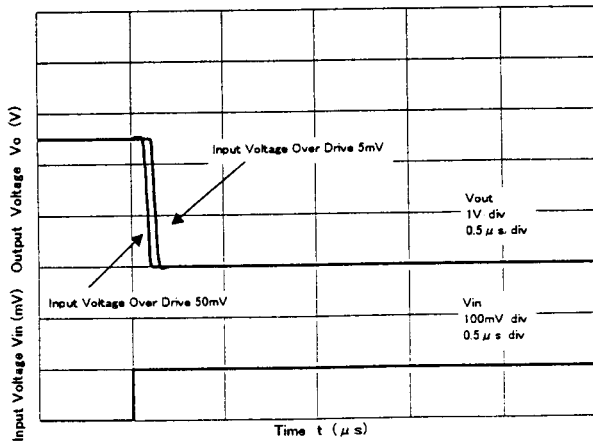

NJM12901 Pulse Response

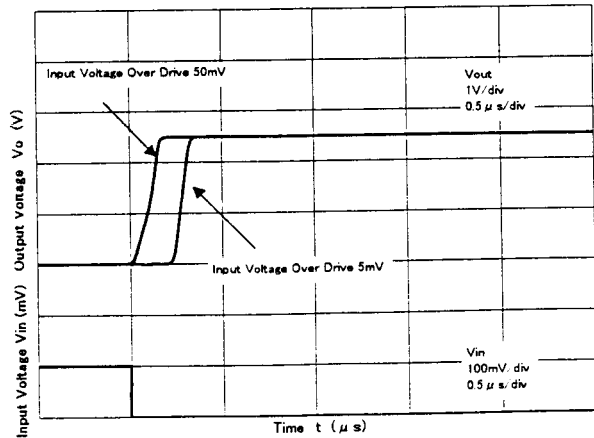

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.