



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



2-INPUT SINGLE VIDEO SWITCH

■ GENERAL DESCRIPTION

The **NJM2233B** is 2-input signal video switch selecting one of two video or audio signals. Its operating voltage is 4.75 to 13V and bandwidth is 10MHz. Crosstalk is 70dB (at 4.43MHz). It is applied to both NTSC and PAL VTR.


■ FEATURES

- Operating Voltage (+4.75V to +13V)
- 2 Input-1 Output
- Crosstalk 70dB (at 4.43MHz)
- Package Outline DIP8, DMP8, SIP8, SSOP8
- Bipolar Technology

■ APPLICATION


- VCR Video Camera AV-TV Video Disc player Audio

■ BLOCK DIAGRAM

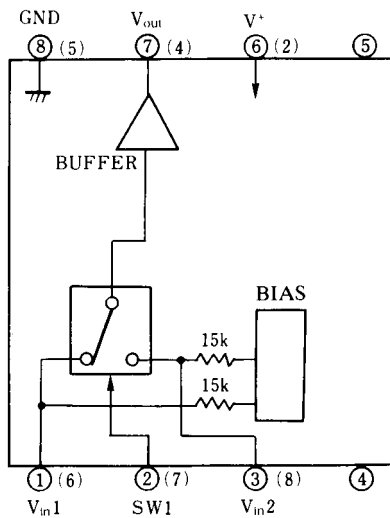


○ : DIP-8, DMP-8 (4, 5Pin NC)
 () : SIP-8 (1, 3pin NC)

■ PACKAGE OUTLINE




NJM2233BD



NJM2233BM



NJM2233BV




NJM2233BL

■ PIN CONFIGURATION

PIN FUNCTION


1. V_{in1}
2. SW1
3. V_{in2}
4. N.C.
5. N.C.
6. V^+
7. V_{out}
8. GND



NJM2233BD
NJM2233BM
NJM2233BV

PIN FUNCTION

1. N.C.
2. V^+
3. N.C.
4. V_{out}
5. GND
6. V_{in1}
7. SW1
8. V_{in2}



NJM2233BL

NJM2233B

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	15	V
Power Dissipation	P _D	(DIP8) 500 (DMP8) 300 (SIP8) 800 (SSOP8) 250	mW mW mW mW
Operating Temperature Range	T _{opr}	-20 to +75	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C

■ ELECTRICAL CHARACTERISTICS


(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺		4.75	-	13.0	V
Operating Current	I _{oc}	S1=S2=S3=1	-	8.5	11.0	mA
Frequency Characteristic (1)	G _{f1}	V _i =2.5V _{pp} V _o (20Hz)/V _o (100kHz)	-	0	±1.0	dB
Frequency Characteristic (2)	G _{f2}	V _i =2.0V _{pp} V _o (10MHz)/V _o (100kHz)	-	0	±1.0	dB
Voltage Gain	G _v	V _i =2.5V _{pp} , 100kHz, V _o /V _i	-0.5	0	-	dB
Total Harmonic Distortion	THD	V _i =2.5V _{pp} , 1kHz	-	0.01	-	%
Differential Gain	DG	V _i =2V _{pp} standard staircase signal	-	0	-	%
Differential Phase	DP	V _i =2V _{pp} standard staircase signal	-	0	-	deg
Output Offset Voltage	V _{off}	S1=S2=1, S3=1→2, V _o voltage change	-	0	±15	mV
Crosstalk	CT	(S1=S3=1, S2=2) and (S1=S3=2, S2=1) V _i =2.0V _{pp} , 4.43MHz, V _o /V _i	-	-70	-	dB
Switch Change Voltage	V _{CH}	Garanteed voltage of all switch on	2.4	-	-	V
	V _{CL}	Garanteed voltage of all switch off	-	-	0.8	V
Input Impedance	R ₁		-	1.5	-	KΩ
Output Impedance	R _O		-	10	-	Ω

■ CONTROL SIGNAL – OUTPUT SIGNAL


SW 1	OUTPUT SIGNAL
L	V _{IN 1}
H	V _{IN 2}

■ TEST CIRCUIT






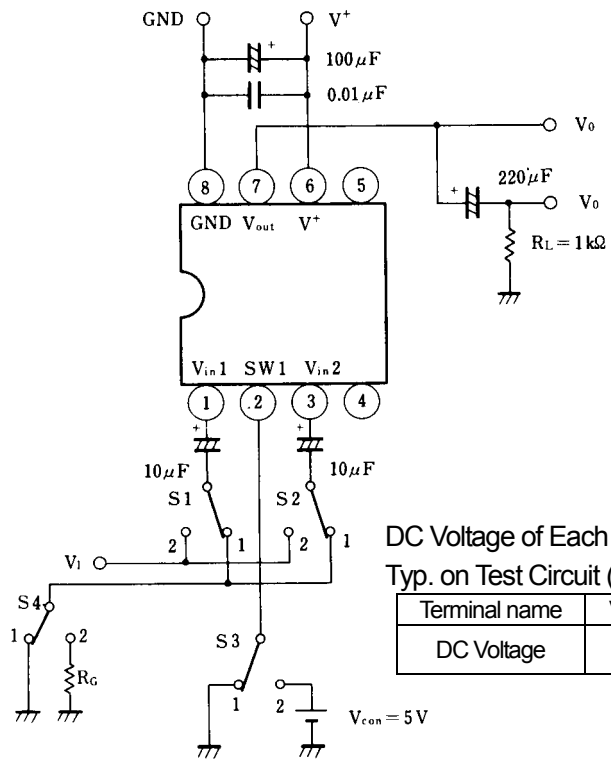


■ APPLICATION







Oscillation Prevention on light loading conditions
Recommended under circuit

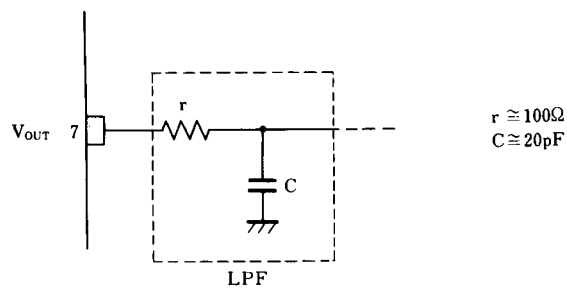

■ TYPICAL CHARACTERISTICS

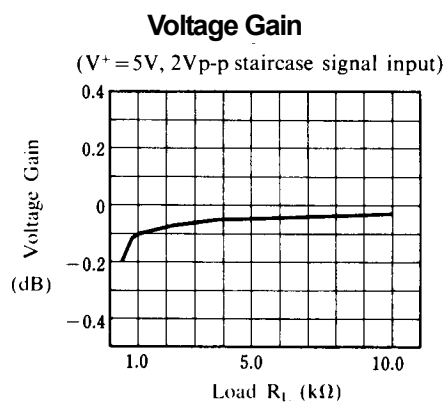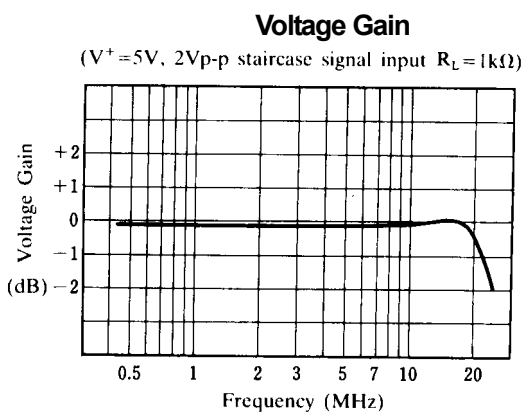
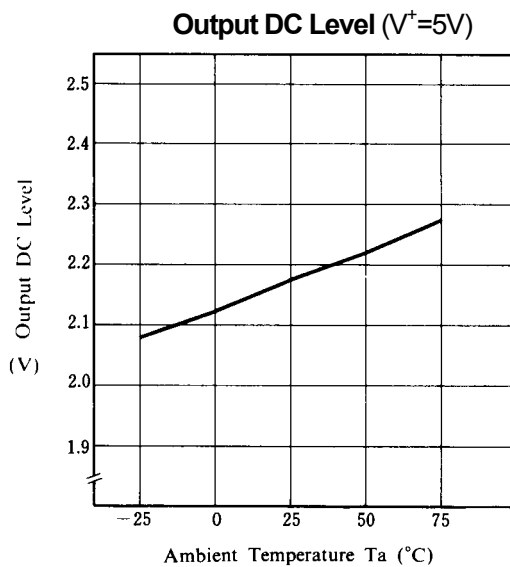
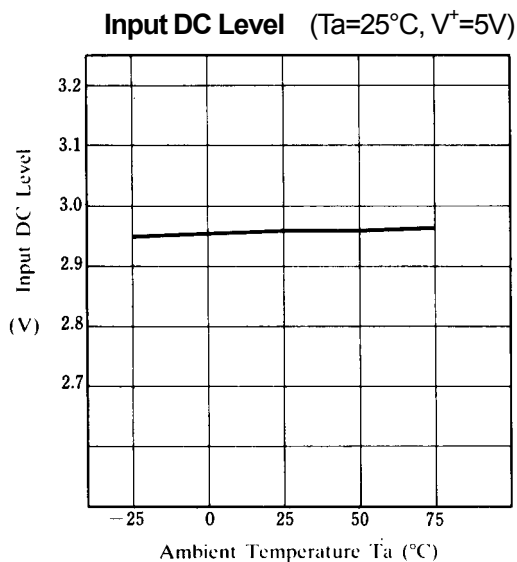
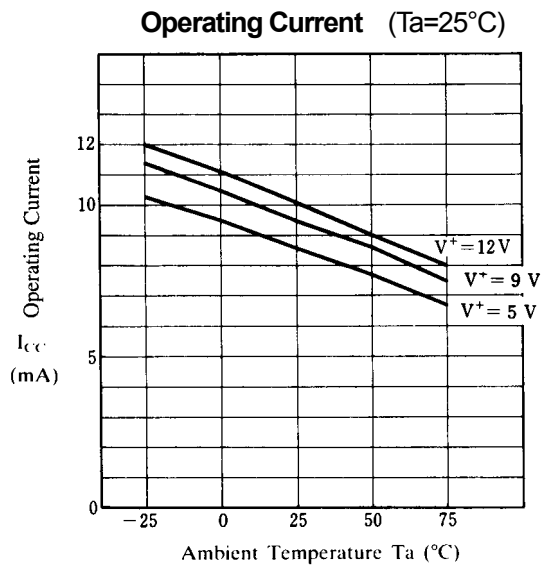
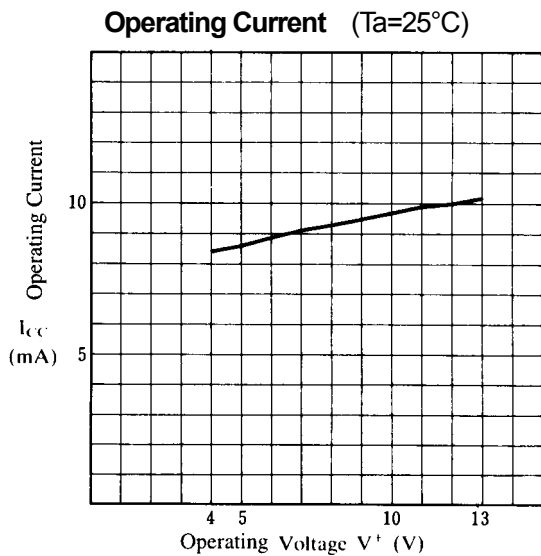


■ TYPICAL CHARACTERISTICS

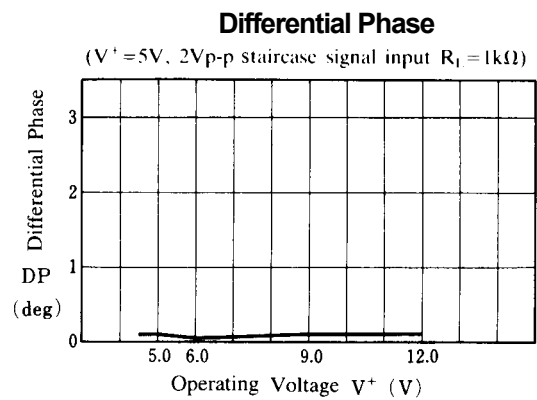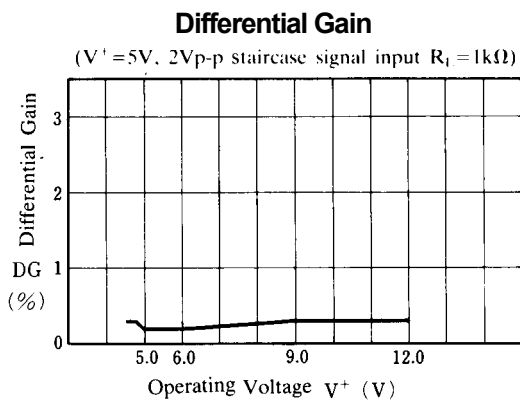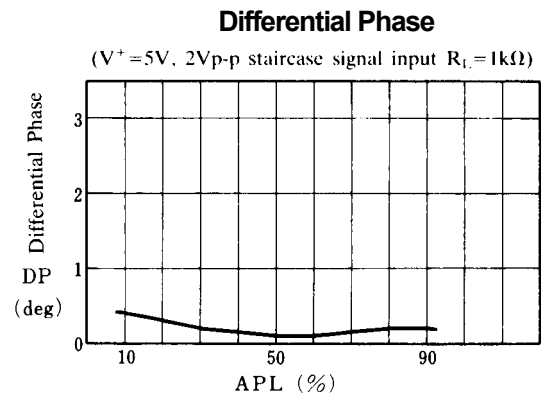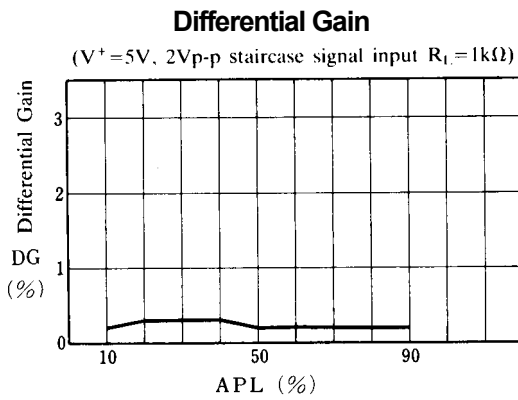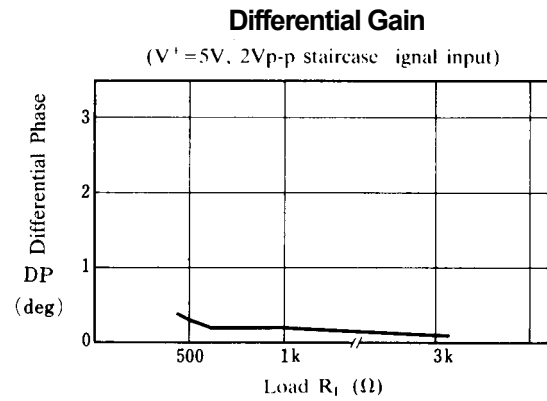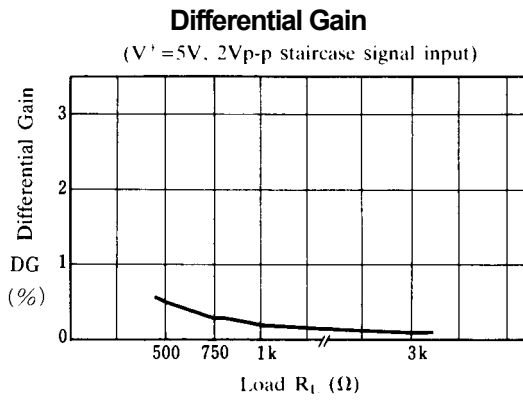

NJM2233B

■ TYPICAL CHARACTERISTICS

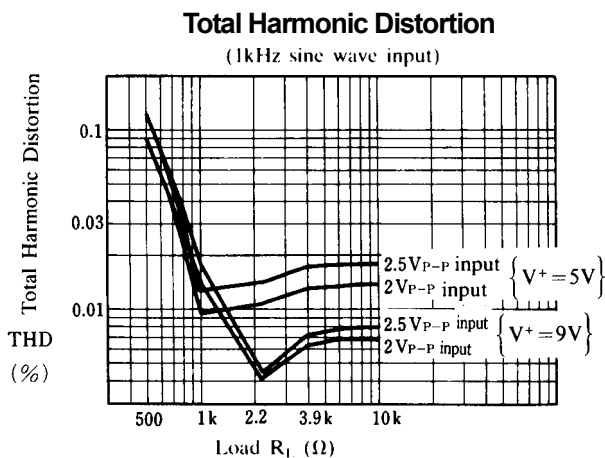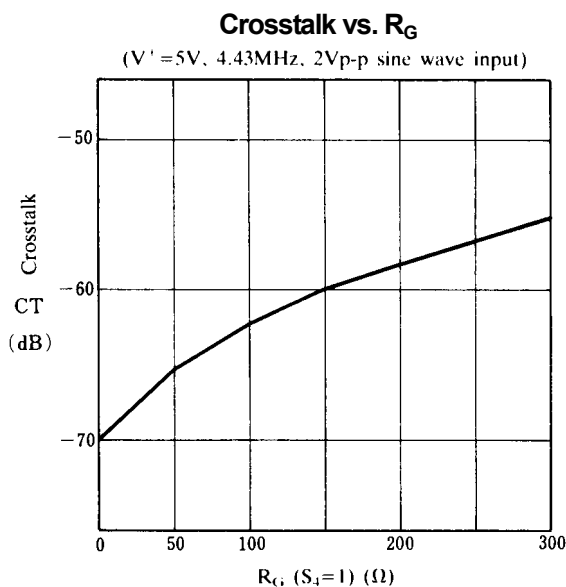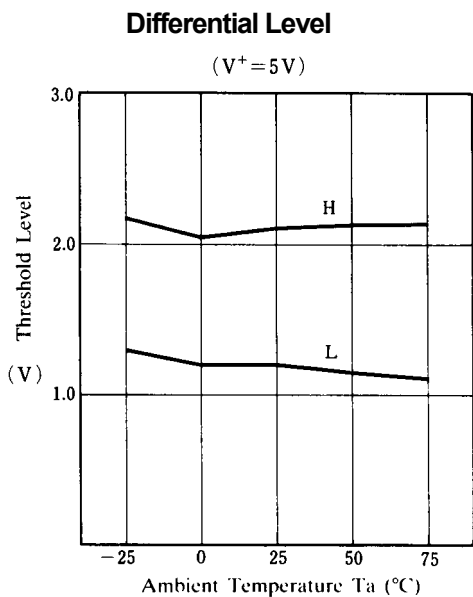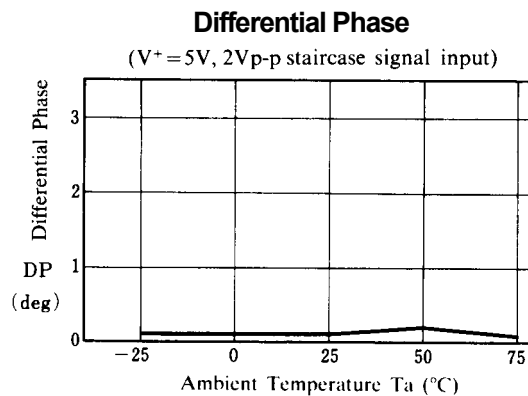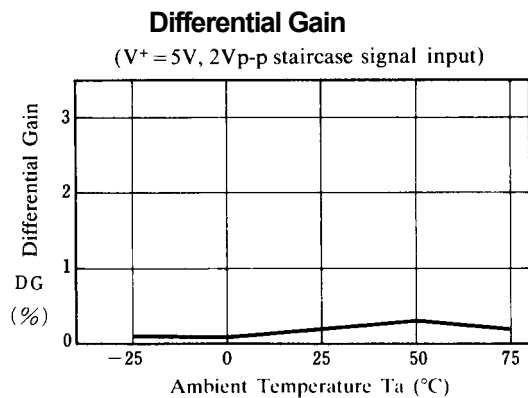


■ EQUIVALENT CIRCUIT

PIN NO.	SYMBOL	INSIDE EQUIVALENT CIRCUIT	PIN NO.	SYMBOL	INSIDE EQUIVALENT CIRCUIT
1	V_{IN-1}		5	NC	_____
2	SW 1		6	V^+	_____
3	V_{IN2}		7	V_{OUT}	
4	NC	_____	8	GND	_____

NJM2233B

■ APPLICATION

This IC requires 0.1uF capacitor between INPUT and GND for bias type input at mute mode.

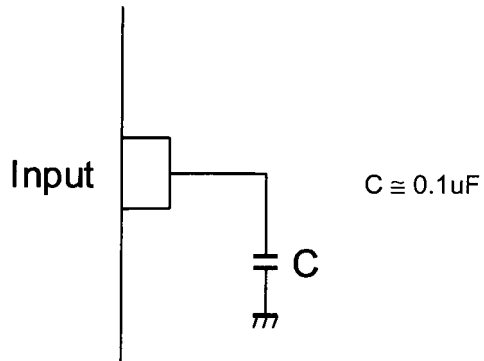

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.