



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## 2-INPUT 3CHANNEL VIDEO SWITCH


### ■ GENERAL DESCRIPTION

**NJM2285** is a switching IC for switching over from one audio or video input signal to another. Internalizing 2 inputs, 1 output, and then each set of 3 can be operated independently. Two of them are Clamp type", and they can be operated while setting DC level fixed in position of the video signal. It is a higher efficiency video switch, featuring the operating supply voltage 5 to 12V, the frequency feature 10MHz, and then the crosstalk 75dB (at 4.43MHz).


### ■ PACKAGE OUTLINE



**NJM2285D**



**NJM2285M**



**NJM2285V**


### ■ FEATURES

- 2 Input-1 Output  
Internalizing 3 Circuits (Two of them are Clamp type).
- Wide Operating Supply Voltage (4.75 to 13.0V)
- Crosstalk 75dB (at 4.43MHz)
- Wide Bandwidth Frequency Feature 10MHz (2V<sub>P-P</sub> Input)
- Package Outline DIP16, DMP16, SSOP16
- Bipolar Technology

### ■ APPLICATIONS

- VCR, Video Camera, AV-TV, Video Disk Player.

### ■ BLOCK DIAGRAM

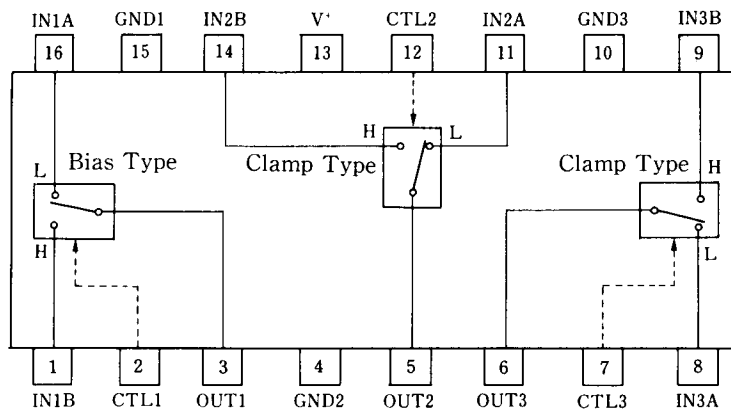

**NJM2285D**  
**NJM2285M**  
**NJM2285V**

# NJM2285

## ■ MAXIMUM RATINGS

(T<sub>a</sub> = 25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	14	V
Power Dissipation	P <sub>D</sub>	(DIP16) 700 (DMP16) 350 (SSOP16) 300	mW mW mW
Operating Temperature Range	T <sub>opr</sub>	-40 to +85	°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +125	°C

## ■ ELECTRICAL CHARACTERISTICS

(V<sup>+</sup> = 5V, T<sub>a</sub> = 25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current (1)	I <sub>CC1</sub>	V <sup>+</sup> = 5V (Note1)	8.0	11.4	14.8	mA
Operating Current (2)	I <sub>CC2</sub>	V <sup>+</sup> = 9V (Note1)	10.0	14.3	18.6	mA
Voltage Gain	G <sub>V</sub>	V <sub>I</sub> = 100kHz, 2V <sub>P,P</sub> , V <sub>O</sub> / V <sub>I</sub>	-0.6	-0.1	+0.4	dB
Frequency Gain	G <sub>F</sub>	V <sub>I</sub> = 2V <sub>P,P</sub> , V <sub>O</sub> (10MHz) / V <sub>O</sub> (100kHz)	-1.0	0	+1.0	dB
Differential Gain	DG	V <sub>I</sub> = 2V <sub>P,P</sub> , Standard Staircase Signal	-	0.3	-	%
Differential Phasa	DP	V <sub>I</sub> = 2V <sub>P,P</sub> , Standard Staircase Signal	-	0.3	-	deg
Output Offset Voltage	V <sub>OS</sub>	(Note2)	-10	0	+10	mV
Crosstalk	CT	V <sub>I</sub> = 2V <sub>P,P</sub> , 4.43MHz, V <sub>O</sub> / V <sub>I</sub>	-	-75	-	dB
Switch Change Over Voltage	V <sub>CH</sub>	All inside Switches ON	2.5	-	-	V
Switch Change Over Voltage	V <sub>CL</sub>	All inside Switches OFF	-	-	1.0	V

(Note1) S1 = S2 = S3 = S4 = S5 = S6 = S7 = 1


(Note2) S1 = S2 = S3 = S4 = S5 = S6 = 1, S7 = 1→2 Measure the output DC voltage difference

## ■ TERMINAL EXPLANATION

PIN No.	PIN NAME	VOLTAGE	INSIDE EQUIVALENT CIRCUIT
16 1	IN 1 A IN 1 B [Input]	2.5V	
11 14 8 9	IN 2 A IN 2 B IN 3 A IN 3 B [Input]	1.5V	
2 12 7	CTL 1 CTL 2 CTL 3 [Switching]		
3	OUT1	1.8V	
5 6	OUT2 OUT3 [Output]	0.8V	
13	V <sup>+</sup>	5V	
15 4 10	GND 1 GND 2 GND 3		

# NJM2285







## TEST CIRCUIT

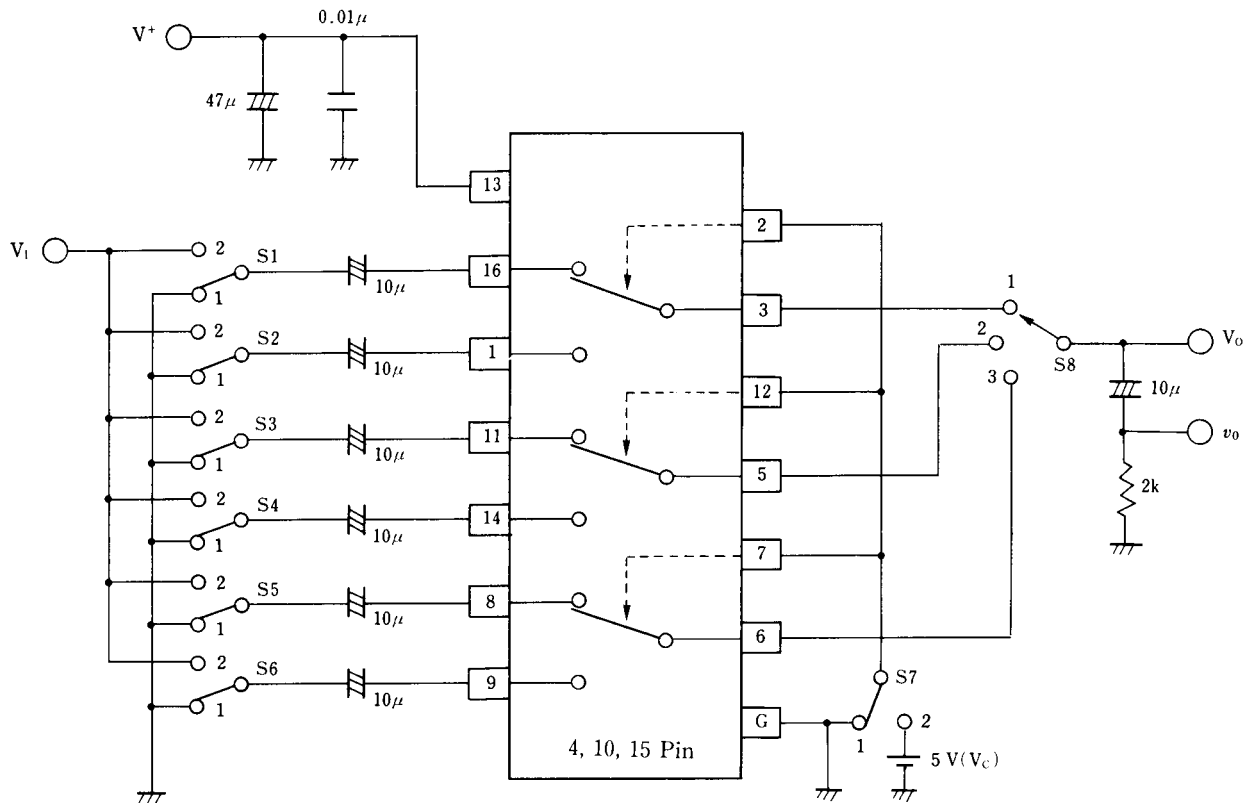

This IC requires 1MΩ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

Parameter	S1	S2	S3	S4	S5	S6	S7	S8	Test Part
$I_{CC1}$	1	1	1	1	1	1	1	1	$V^+$
$I_{CC2}$	1	1	1	1	1	1	1	1	
$G_{V1}$	2	1	1	1	1	1	1	1	$v_o$
$G_{F1}$	2	1	1	1	1	1	1	1	
$DG_1$	2	1	1	1	1	1	1	1	
$DP_1$	2	1	1	1	1	1	1	1	
CT 1	2	1	1	1	1	1	2	1	$v_o$
CT 2	1	2	1	1	1	1	1	1	
CT 3	1	1	2	1	1	1	2	2	
CT 4	1	1	1	2	1	1	1	2	
CT 5	1	1	1	1	2	1	2	3	
CT 6	1	1	1	1	1	2	1	3	
$V_{OS1}$	1	1	1	1	1	1	1/2	1	$V_O$
$V_{C1}$	1/2	2/1	1	1	1	1	$V_C$	1	$V_C$
THD	2	1	1	1	1	1	1	1	$v_o$


## ■ TYPICAL CHARACTERISTICS

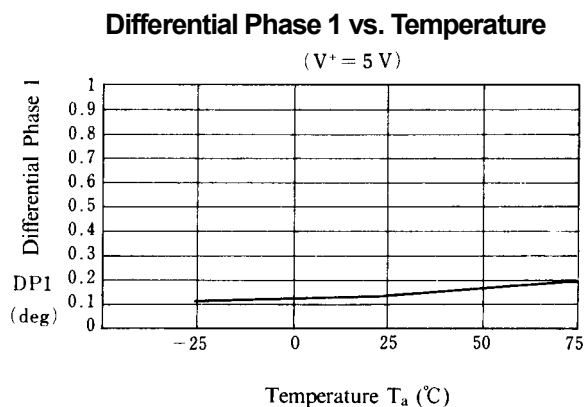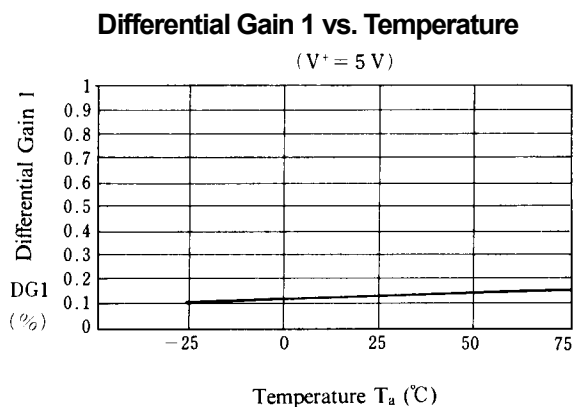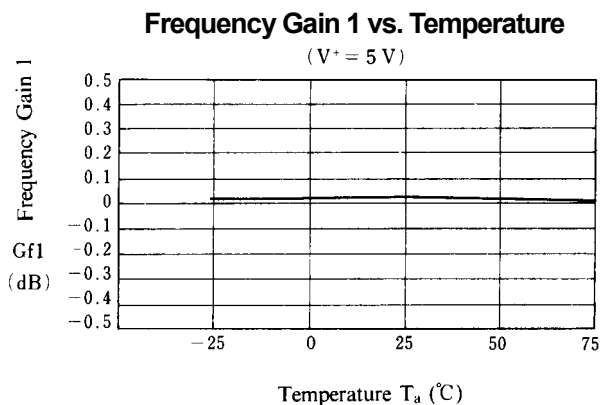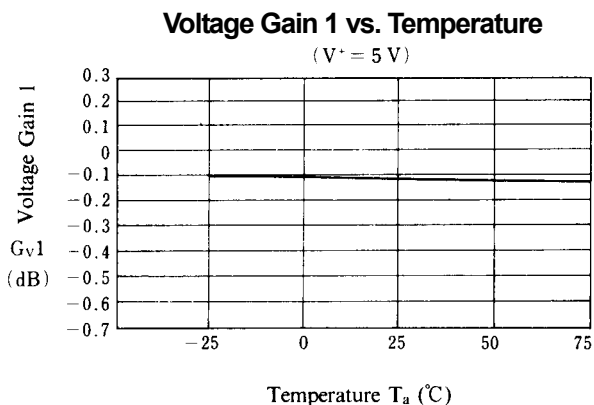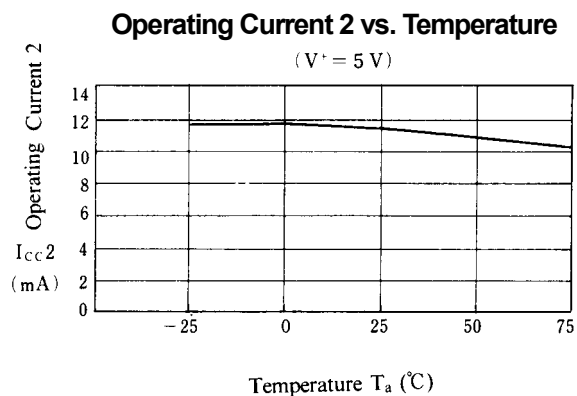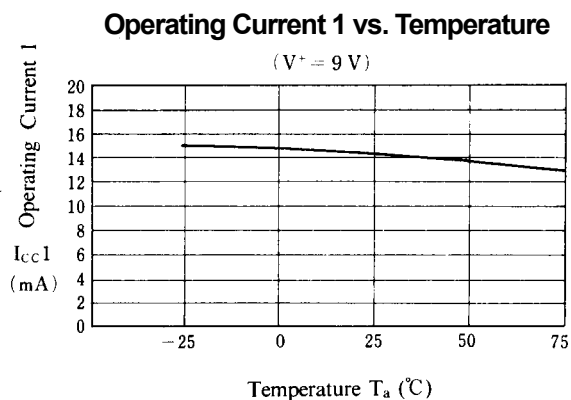

## ■ TYPICAL CHARACTERISTICS


**Offset Voltage 1 vs. Temperature**

( $V^+ = 5\text{ V}$ )

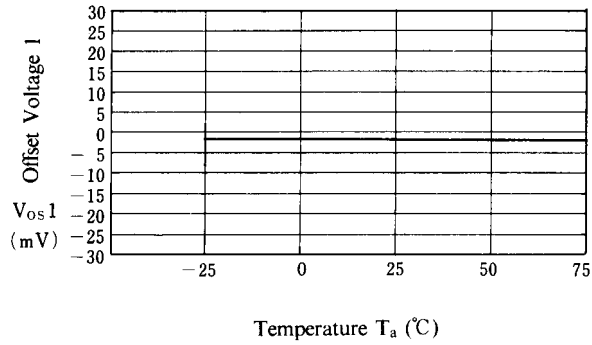


**Crosstalk 1 vs. Temperature**

( $V^+ = 5\text{ V}$ )

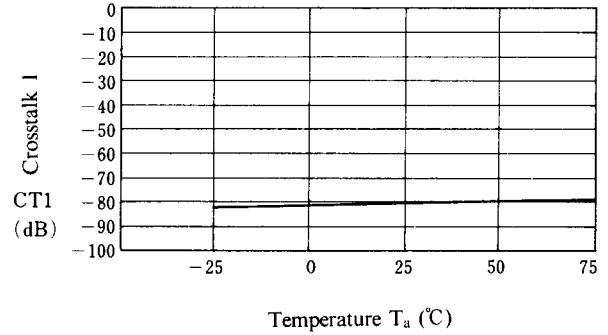


**Crosstalk 2 vs. Temperature**

( $V^+ = 5\text{ V}$ )

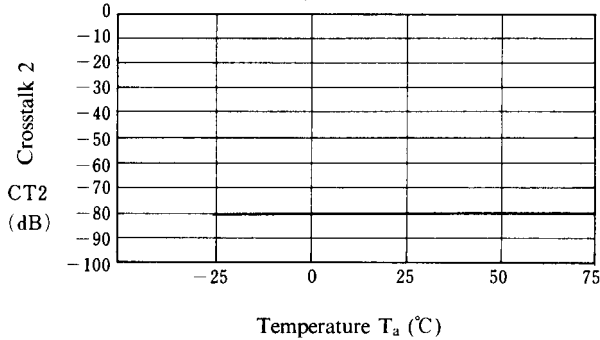


**Crosstalk 3 vs. Temperature**

( $V^+ = 5\text{ V}$ )

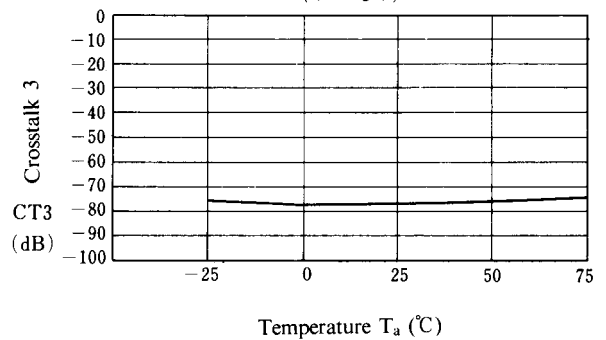


**Crosstalk 4 vs. Temperature**

( $V^+ = 5\text{ V}$ )

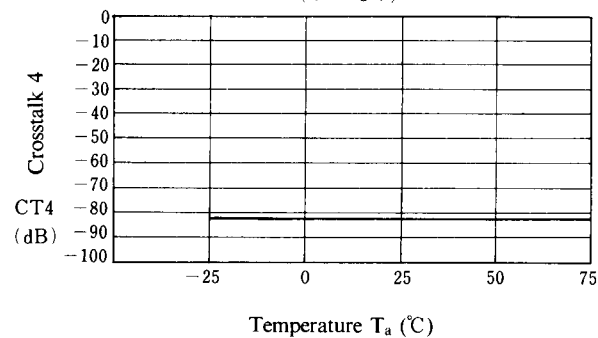


**Crosstalk 5 vs. Temperature**

( $V^+ = 5\text{ V}$ )

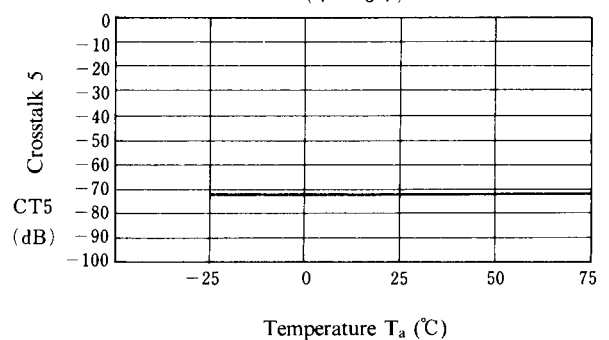


## ■ TYPICAL CHARACTERISTICS


**Crosstalk 6 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

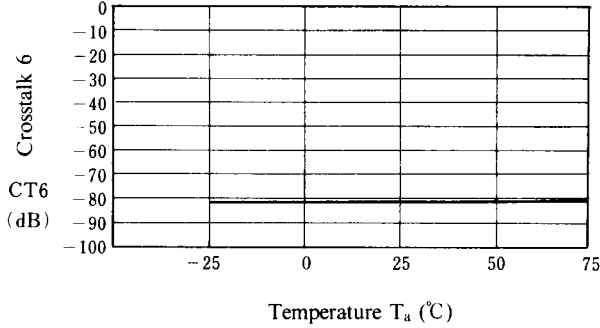


**Switch Change Over 1 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

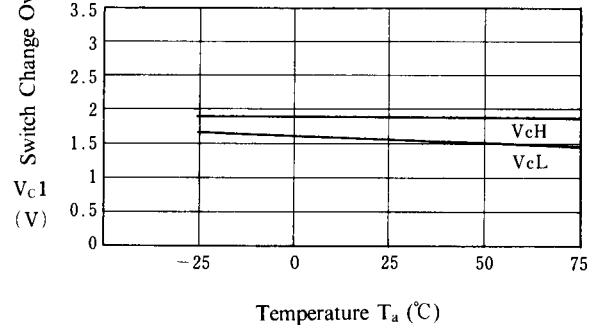


**Supply Current 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

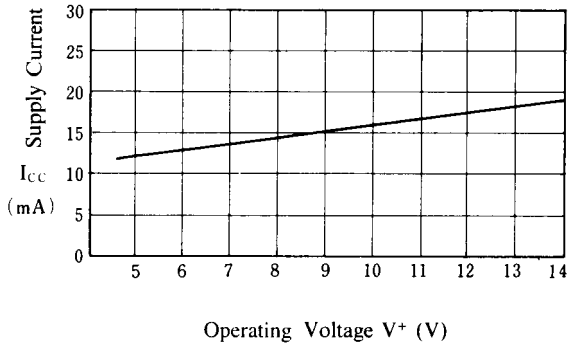


**Voltage Gain 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

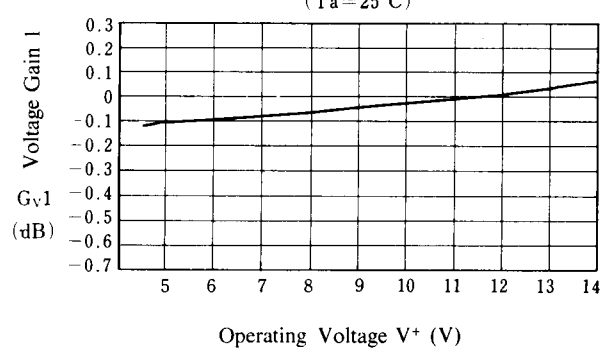

**Frequency vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

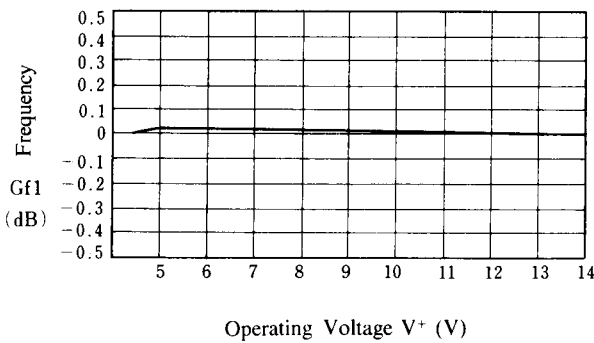

**Differential Gain 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

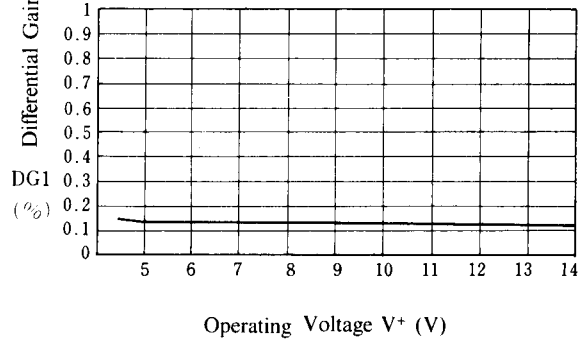




## ■ TYPICAL CHARACTERISTICS


**Differential Phase 1 vs. Operating Voltage**

( $T_a = 25^\circ\text{C}$ )

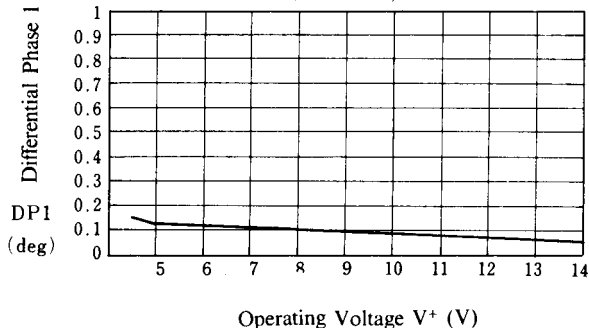


**Offset Voltage 1 vs. Operating Voltage**

( $T_a = 25^\circ\text{C}$ )

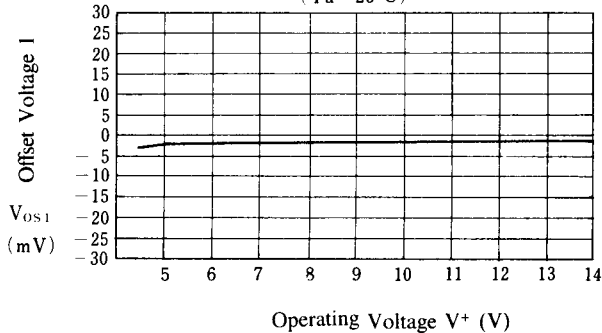


**Crosstalk 1 vs. Operating Voltage**

( $T_a = 25^\circ\text{C}$ )

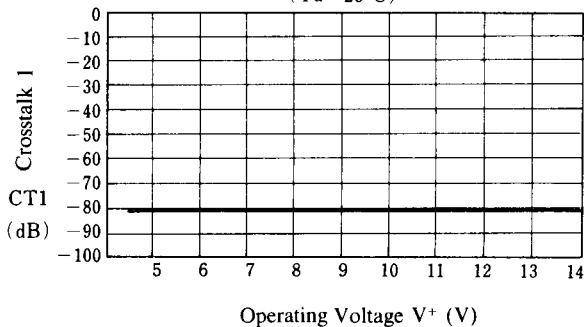


**Crosstalk 2 vs. Operating Voltage**

( $T_a = 25^\circ\text{C}$ )

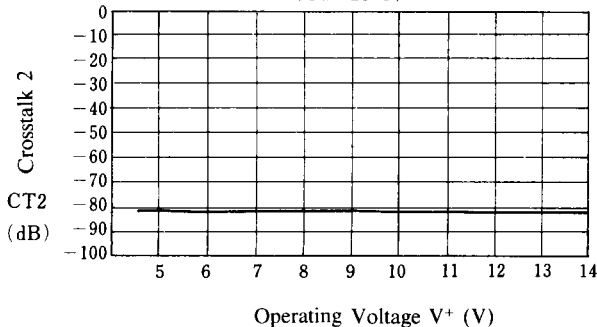


**Crosstalk 3 vs. Operating Voltage**

( $T_a = 25^\circ\text{C}$ )

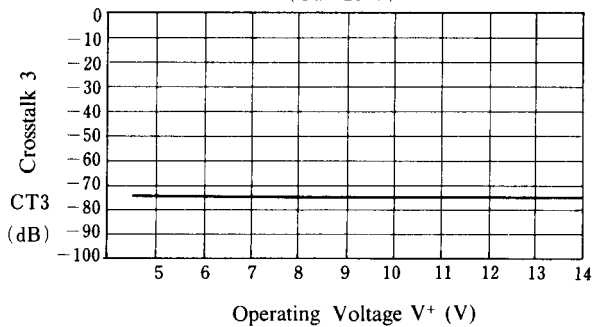


**Crosstalk 4 vs. Operating Voltage**

( $T_a = 25^\circ\text{C}$ )

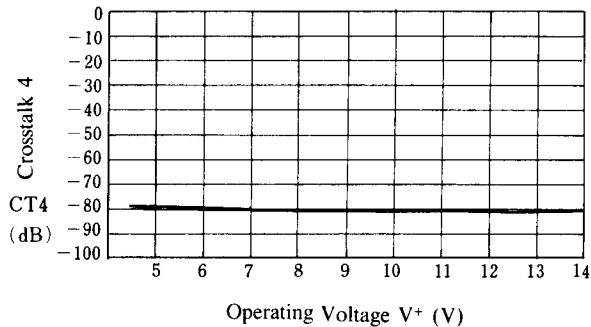


## ■ TYPICAL CHARACTERISTICS


**Crosstalk 5 vs. Operating Voltage  $V^+$  (V)**  
( $T_a=25^\circ\text{C}$ )

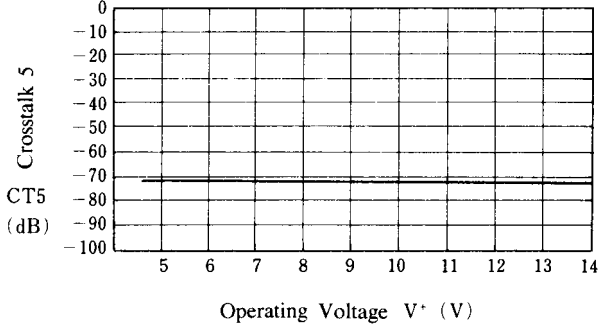


**Crosstalk 6 vs. Operating Voltage  $V^+$  (V)**  
( $T_a=25^\circ\text{C}$ )

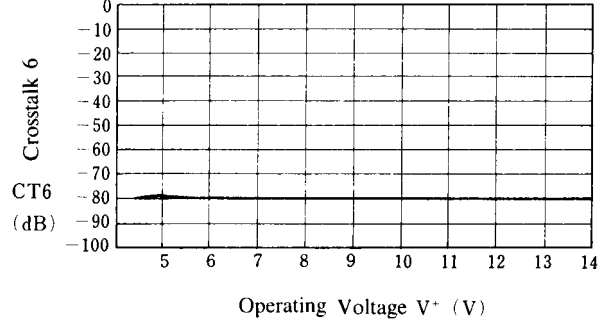


**Switch Change Over 1 vs. Operating Voltage**  
( $T_a=25^\circ\text{C}$ )

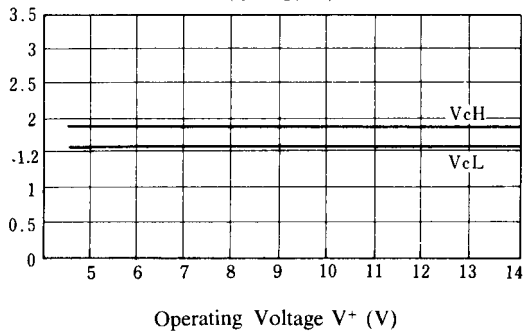


**Differential Gain 1 vs. Frequency**  
( $T_a=25^\circ\text{C}$ )

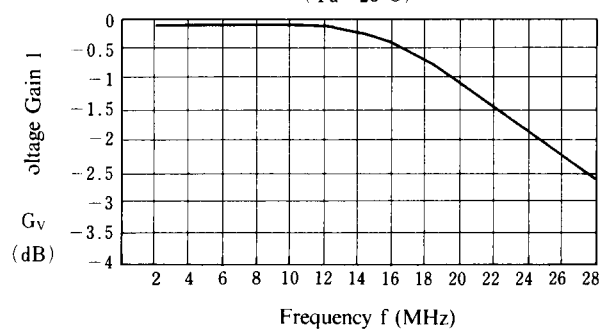

**Differential Gain 1 vs. Load Resistor**  
( $T_a=25^\circ\text{C}$ )

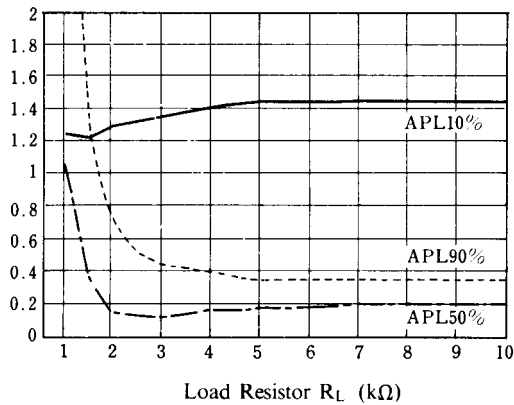


**Differential Gain 3 vs. Load Resistor**  
( $T_a=25^\circ\text{C}$ )

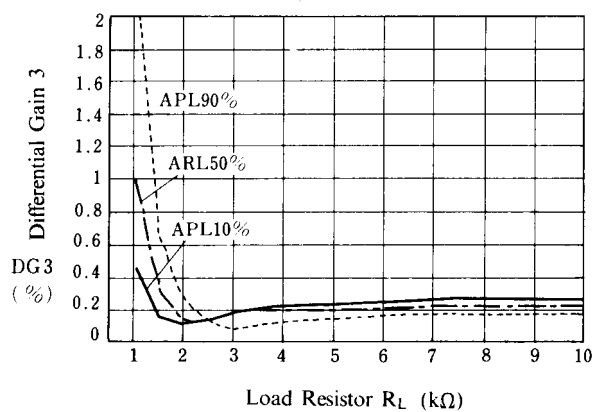

## ■ TYPICAL CHARACTERISTICS


### Differential Phase 1 vs. Load Resistor

( $T_a = 25^\circ\text{C}$ )

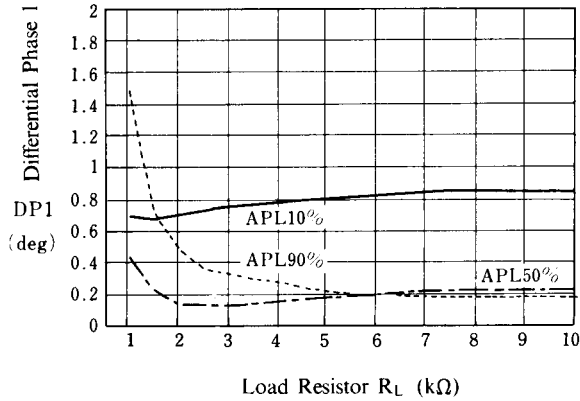


### Differential Phase 3 vs. Load Resistor

( $T_a = 25^\circ\text{C}$ )

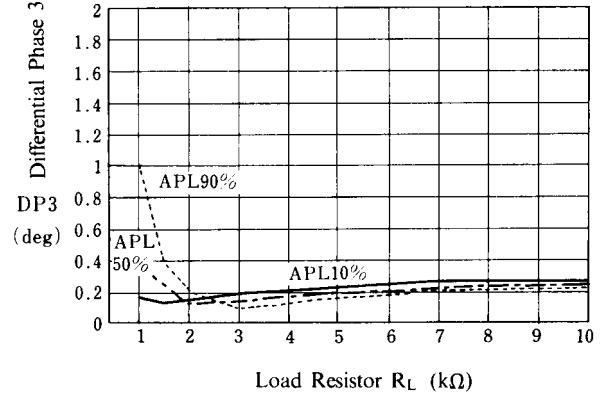


### Differential Gain 1 vs. APL

( $T_a = 25^\circ\text{C}$ )

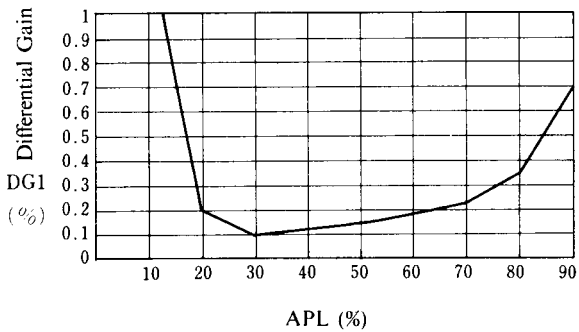


### Differential Gain 3 vs. APL

( $T_a = 25^\circ\text{C}$ )

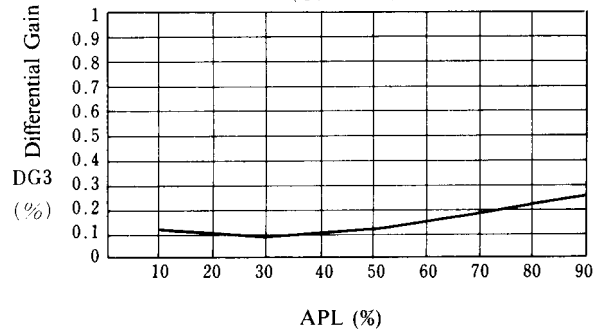


### Differential Phase 1 vs. APL

( $T_a = 25^\circ\text{C}$ )

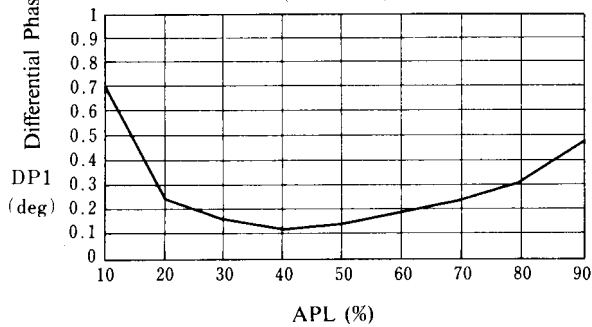


### Differential Phase 3 vs. APL

( $T_a = 25^\circ\text{C}$ )

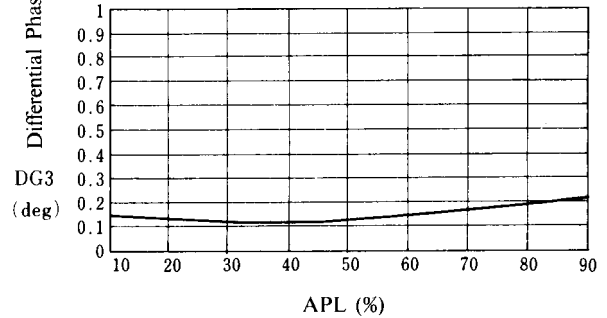


## ■ TYPICAL CHARACTERISTICS

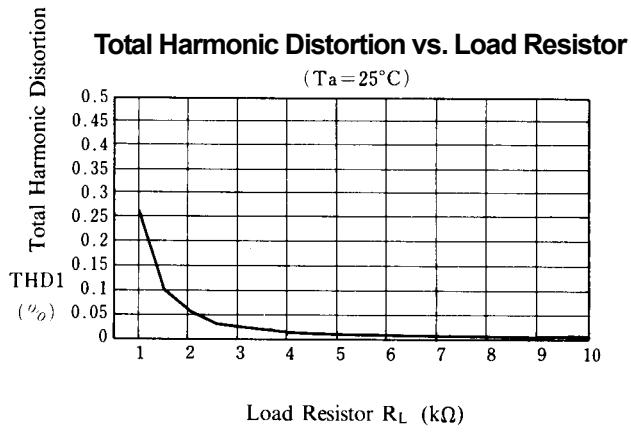


# NJM2285

## ■ APPLICATION


This IC requires  $1\text{M}\Omega$  resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

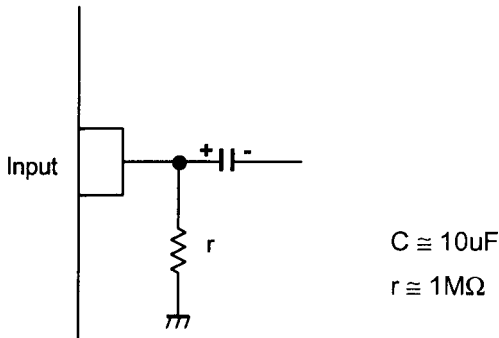

This IC requires  $0.1\mu\text{F}$  capacitor between INPUT and GND,  $1\text{M}\Omega$  resistance between INPUT and GND for clamp type input at mute mode.

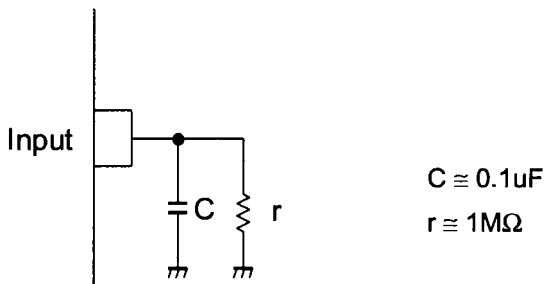

This IC requires  $0.1\mu\text{F}$  capacitor between INPUT and GND for bias type input at mute mode.

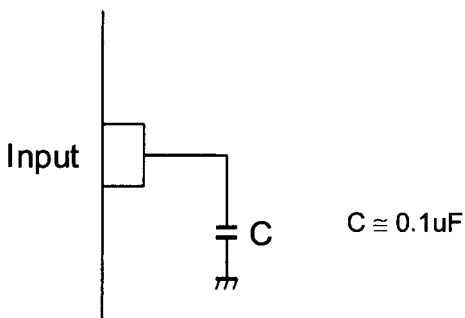

[CAUTION]  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.