



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## 3-TERMINAL POSITIVE VOLTAGE REGULATOR


### ■ GENERAL DESCRIPTION

The NJM78M00 series of 3-Terminal Positive Voltage Regulators is constructed using the New JRC Planar epitaxial process. These regulators employ internal current-limiting, thermal-shutdown and safe-area compensation making them essentially indestructible. If adequate heat sinking is provided, they can deliver in excess of 500mA output current. They are intended as fixed voltage regulation in a wide range of applications including local or on-card regulation for elimination of noise and distribution problems associated with single point regulation. In addition to use as fixed voltage regulators, these devices can be used with external components to obtain adjustable output voltages and currents.

### ■ FEATURES


- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guaranteed 500mA Output Current
- Package Outline            TO-220F, TO-252
- Bipolar Technology

### ■ EQUIVALENT CIRCUIT

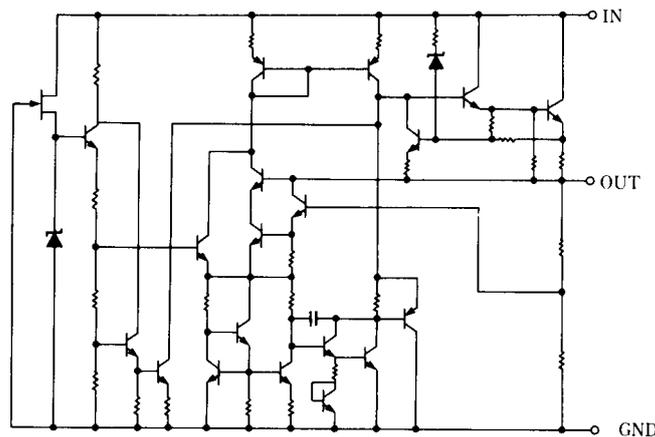


### ■ PACKAGE OUTLINE

(TO-220F)



(TO-252)



#### NJM78M00FA

1. IN
2. GND
3. OUT

#### NJM78M00DL1A

1. IN
2. GND
3. OUT

(note) The radiation fin is connected pin2.

# NJM78M00

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS		UNIT
Input Voltage	$V_{IN}$	78M05 to 78M09 78M12 to 78M15 78M18 to 78M24	35 35 40	V
Storage Temperature Range	$T_{stg}$	-40 to +150		°C
Operating Temperature Range	Operating Junction Temperature	$T_j$	-40 to +150	°C
		$T_{opr}$	-40 to +85	
Power Dissipation	$P_D$	TO-220F TO-252	7.5( $T_C \leq 85^\circ\text{C}$ ) 7.5( $T_C \leq 56^\circ\text{C}$ ) 1.0( $T_a = 25^\circ\text{C}$ )	W

## ■ ELECTRICAL CHARACTERISTICS (C<sub>IN</sub>=0.33μF, C<sub>O</sub>=0.1μF, T<sub>J</sub>=25°C)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM78M05FA/DL1A</b>						
Output Voltage	$V_O$	$V_{IN}=10\text{V}$ , $I_O=350\text{mA}$	4.8	5.0	5.2	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=7$ to 25V, $I_O=200\text{mA}$	-	3	50	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=10\text{V}$ , $I_O=5$ to 500mA	-	5	50	mV
Quiescent Current	$I_Q$	$V_{IN}=10\text{V}$ , $I_O=0\text{mA}$	-	4	6	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=10\text{V}$ , $I_O=5\text{mA}$	-	-1	-	mV/°C
Ripple Rejection	RR	$V_{IN}=10\text{V}$ , $I_O=350\text{mA}$ , $e_{in}=1\text{V}_{P.P.}$ , $f=120\text{Hz}$	60	80	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=10\text{V}$ , BW=10Hz to 100kHz, $I_O=350\text{mA}$	-	60	-	μV

■ **ELECTRICAL CHARACTERISTICS** ( $C_{IN}=0.33\mu\text{F}$ ,  $C_O=0.1\mu\text{F}$ ,  $T_j=25^\circ\text{C}$ )

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM78M06FA/DL1</b>						
Output Voltage	$V_O$	$V_{IN}=11\text{V}$ , $I_O=350\text{mA}$	5.75	6.0	6.25	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=8$ to $25\text{V}$ , $I_O=200\text{mA}$	-	5	60	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=11\text{V}$ , $I_O=5$ to $500\text{mA}$	-	5	60	mV
Quiescent Current	$I_Q$	$V_{IN}=11\text{V}$ , $I_O=0\text{mA}$	-	4	6	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=11\text{V}$ , $I_O=5\text{mA}$	-	-1	-	mV/°C
Ripple Rejection	RR	$V_{IN}=11\text{V}$ , $I_O=350\text{mA}$ , $e_{in}=1V_{P-P}$ , $f=120\text{Hz}$	59	75	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=11\text{V}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ , $I_O=350\text{mA}$	-	70	-	$\mu\text{V}$
<b>NJM78M08FA/DL1</b>						
Output Voltage	$V_O$	$V_{IN}=14\text{V}$ , $I_O=350\text{mA}$	7.7	8.0	8.3	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=10.5$ to $25\text{V}$ , $I_O=200\text{mA}$	-	6	60	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=14\text{V}$ , $I_O=5$ to $500\text{mA}$	-	8	80	mV
Quiescent Current	$I_Q$	$V_{IN}=14\text{V}$ , $I_O=0\text{mA}$	-	4	6	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=14\text{V}$ , $I_O=5\text{mA}$	-	-1	-	mV/°C
Ripple Rejection	RR	$V_{IN}=14\text{V}$ , $I_O=350\text{mA}$ , $e_{in}=1V_{P-P}$ , $f=120\text{Hz}$	56	75	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=14\text{V}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ , $I_O=350\text{mA}$	-	80	-	$\mu\text{V}$
<b>NJM78M09FA/DL1</b>						
Output Voltage	$V_O$	$V_{IN}=15\text{V}$ , $I_O=350\text{mA}$	8.65	9.0	9.35	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=11.5$ to $25\text{V}$ , $I_O=200\text{mA}$	-	6	60	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=15\text{V}$ , $I_O=5$ to $500\text{mA}$	-	8	90	mV
Quiescent Current	$I_Q$	$V_{IN}=15\text{V}$ , $I_O=0\text{mA}$	-	4.1	6	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=15\text{V}$ , $I_O=5\text{mA}$	-	-1	-	mV/°C
Ripple Rejection	RR	$V_{IN}=15\text{V}$ , $I_O=350\text{mA}$ , $e_{in}=1V_{P-P}$ , $f=120\text{Hz}$	56	70	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=15\text{V}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ , $I_O=350\text{mA}$	-	90	-	$\mu\text{V}$
<b>NJM78M12FA/DL1</b>						
Output Voltage	$V_O$	$V_{IN}=19\text{V}$ , $I_O=350\text{mA}$	11.5	12.0	12.5	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=14.5$ to $30\text{V}$ , $I_O=200\text{mA}$	-	8	60	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=19\text{V}$ , $I_O=5$ to $500\text{mA}$	-	8	120	mV
Quiescent Current	$I_Q$	$V_{IN}=19\text{V}$ , $I_O=0\text{mA}$	-	4.1	6	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=19\text{V}$ , $I_O=5\text{mA}$	-	-1	-	mV/°C
Ripple Rejection	RR	$V_{IN}=19\text{V}$ , $I_O=350\text{mA}$ , $e_{in}=1V_{P-P}$ , $f=120\text{Hz}$	55	70	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=19\text{V}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ , $I_O=350\text{mA}$	-	100	-	$\mu\text{V}$

# NJM78M00


## ■ ELECTRICAL CHARACTERISTICS (C<sub>IN</sub>=0.33μF, C<sub>O</sub>=0.1μF, T<sub>J</sub>=25°C)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM78M15FA/DL1</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =23V, I <sub>O</sub> =350mA	14.4	15.0	15.6	V
Line Regulation	ΔV <sub>O</sub> -V <sub>IN</sub>	V <sub>IN</sub> =17.5 to 30V, I <sub>O</sub> =200mA	-	10	60	mV
Load Regulation	ΔV <sub>O</sub> -I <sub>O</sub>	V <sub>IN</sub> =23V, I <sub>O</sub> =5 to 500mA	-	10	150	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =23V, I <sub>O</sub> =0mA	-	4.1	6	mA
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	V <sub>IN</sub> =23V, I <sub>O</sub> =5mA	-	-1	-	mV/°C
Ripple Rejection	RR	V <sub>IN</sub> =23V, I <sub>O</sub> =350mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	54	70	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =23V, BW=10Hz to 100kHz, I <sub>O</sub> =350mA	-	120	-	μV
<b>NJM78M18FA/DL1</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =27V, I <sub>O</sub> =350mA	17.3	18.0	18.7	V
Line Regulation	ΔV <sub>O</sub> -V <sub>IN</sub>	V <sub>IN</sub> =21 to 33V, I <sub>O</sub> =200mA	-	10	60	mV
Load Regulation	ΔV <sub>O</sub> -I <sub>O</sub>	V <sub>IN</sub> =27V, I <sub>O</sub> =5 to 500mA	-	15	180	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =27 V, I <sub>O</sub> =0mA	-	4.2	6	mA
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	V <sub>IN</sub> =27V, I <sub>O</sub> =5mA	-	-1.1	-	mV/°C
Ripple Rejection	RR	V <sub>IN</sub> =27V, I <sub>O</sub> =350mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	53	65	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =27V, BW=10Hz to 100kHz, I <sub>O</sub> =350mA	-	140	-	μV
<b>NJM78M20FA/DL1</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =29V, I <sub>O</sub> =350mA	19.2	20.0	20.8	V
Line Regulation	ΔV <sub>O</sub> -V <sub>IN</sub>	V <sub>IN</sub> =23 to 35V, I <sub>O</sub> =200mA	-	10	60	mV
Load Regulation	ΔV <sub>O</sub> -I <sub>O</sub>	V <sub>IN</sub> =29V, I <sub>O</sub> =5 to 500mA	-	20	200	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =29V, I <sub>O</sub> =0mA	-	4	6	mA
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	V <sub>IN</sub> =29V, I <sub>O</sub> =5mA	-	-1.1	-	mV/°C
Ripple Rejection	RR	V <sub>IN</sub> =29V, I <sub>O</sub> =350mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	53	65	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =29V, BW=10Hz to 100kHz, I <sub>O</sub> =350mA	-	150	-	μV
<b>NJM78M24FA/DL1</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =33V, I <sub>O</sub> =350mA	23.0	24	25.0	V
Line Regulation	ΔV <sub>O</sub> -V <sub>IN</sub>	V <sub>IN</sub> =27 to 38V, I <sub>O</sub> =200mA	-	10	60	mV
Load Regulation	ΔV <sub>O</sub> -I <sub>O</sub>	V <sub>IN</sub> =33V, I <sub>O</sub> =5 to 500mA	-	20	240	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =33V, I <sub>O</sub> =0mA	-	4.2	6	mA
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	V <sub>IN</sub> =33V, I <sub>O</sub> =5mA	-	-1.2	-	mV/°C
Ripple Rejection	RR	V <sub>IN</sub> =33V, I <sub>O</sub> =350mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	50	60	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =33V, BW=10Hz to 100kHz, I <sub>O</sub> =350mA	-	160	-	μV


**TEST CIRCUIT**

1. Output Voltage, Line Regulation, Load Regulation, Quiescent Current, Average Temperature Coefficient of Output Voltage, Output Noise Voltage

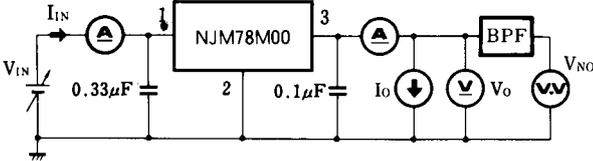

- Measurement is to be conducted
- $I_Q = I_{IN} - I_O$  in pulse testing

2. Ripple Rejection

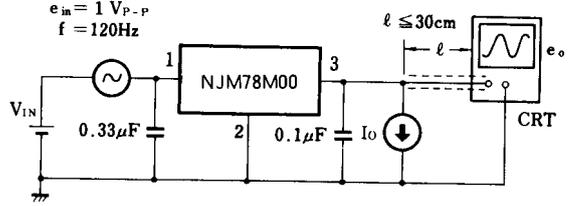


$$RR = 20 \log_{10} \left( \frac{e_{in}}{e_o} \right) \text{ [dB]}$$

**POWER DISSIPATION VS. AMBIENT TEMPERATURE**


**NJM78M00DL1A Power Dissipation**

( $T_{opr} = -40 \sim +85^\circ\text{C}$ ,  $T_j = \sim +150^\circ\text{C}$ ,  $P_D = 7.5\text{W}$  ( $T_c \leq 56^\circ\text{C}$ ),  $P_D = 1\text{W}$  ( $T_a \leq 25^\circ\text{C}$ ))

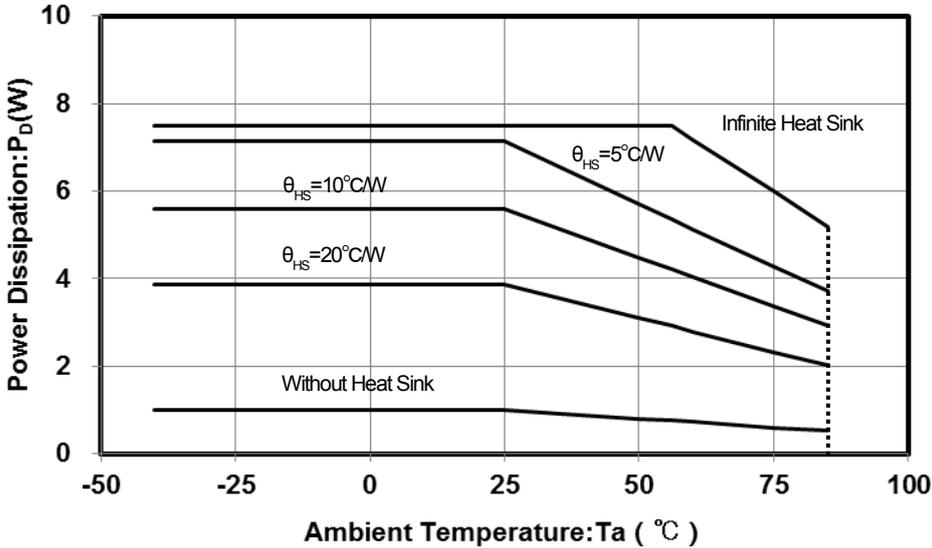

**NJM78M00FA Power Dissipation**

( $T_{opr} = -40 \sim +85^\circ\text{C}$ ,  $T_j = \sim +150^\circ\text{C}$ ,  $P_D = 7.5\text{W}$  ( $T_c \leq 85^\circ\text{C}$ ))

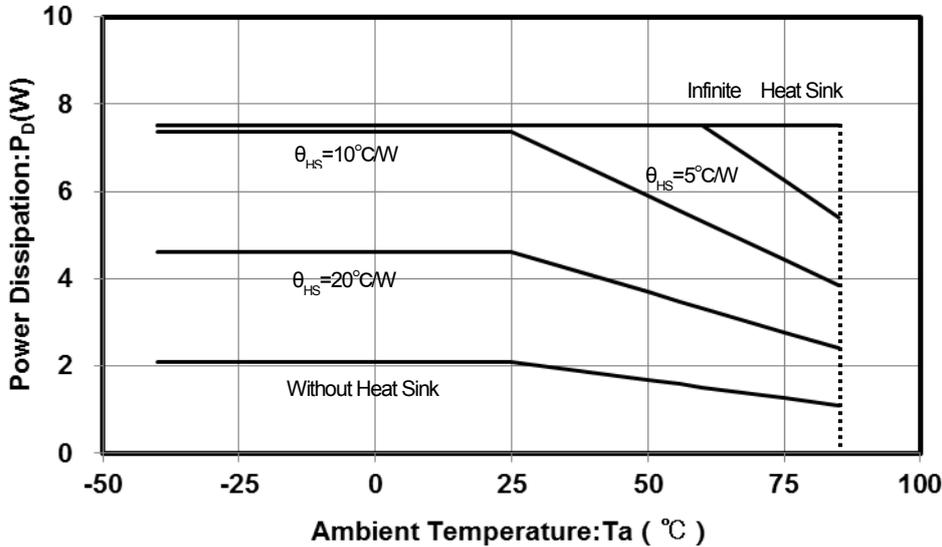

## ■ Input Capacitor $C_{IN}$

Input Capacitor  $C_{IN}$  is required to prevent oscillation and reduce power supply ripple for applications when high power supply impedance or a long power supply line.

Therefore, use the recommended  $C_{IN}$  value (refer to conditions of ELECTRIC CHARACTERISTIC) or larger and should connect between GND and  $V_{IN}$  as shortest path as possible to avoid the problem.

## ■ Output Capacitor $C_O$

Output capacitor ( $C_O$ ) will be required for a phase compensation of the internal error amplifier.

The capacitance and the equivalent series resistance (ESR) influence to stable operation of the regulator.

Use of a smaller  $C_O$  may cause excess output noise or oscillation of the regulator due to lack of the phase compensation.

On the other hand, Use of a larger  $C_O$  reduces output noise and ripple output, and also improves output transient response when rapid load change.


Therefore, use the recommended  $C_O$  value (refer to conditions of ELECTRIC CHARACTERISTIC) or larger and should connect between GND and  $V_{OUT}$  as shortest path as possible for stable operation

In addition, you should consider varied characteristics of capacitor (a frequency characteristic, a temperature characteristic, a DC bias characteristic and so on) and unevenness peculiar to a capacitor supplier enough.


When selecting  $C_O$ , recommend that have withstand voltage margin against output voltage and superior temperature characteristic though

## ■ TYPICAL CHARACTERISTICS


**NJM78M05/M15/M24 Output Characteristics**  
( $I_o=0.35A$ ,  $T_j=25^\circ C$ )

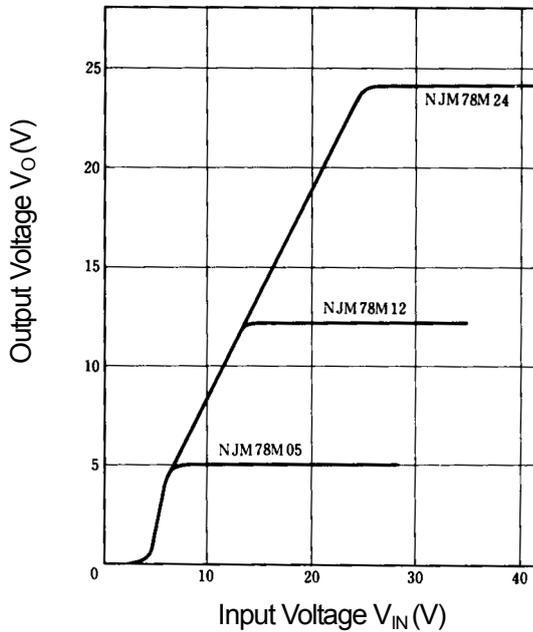


**NJM78M05/M15/M24 Output Characteristics**  
( $I_o=0.35A$ ,  $T_j=25^\circ C$ )

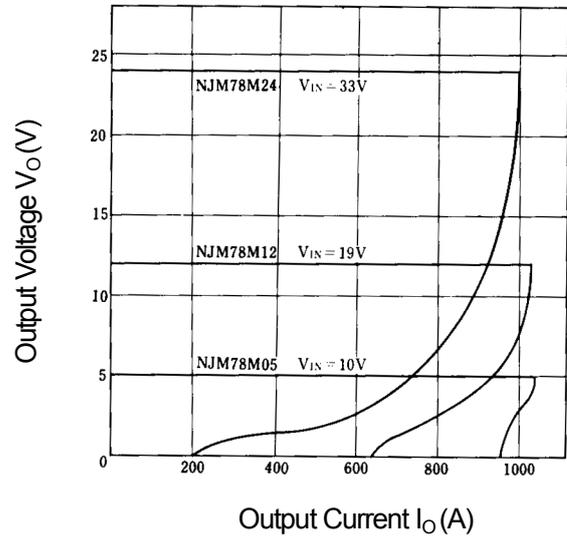


**NJM78M05 Quiescent Current vs. Input Voltage**  
( $I_o=0mA$ ,  $T_j=25^\circ C$ )

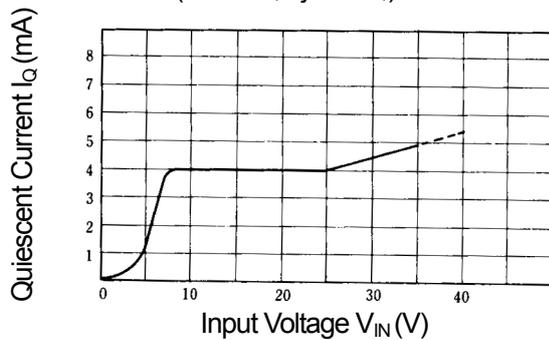

**NJM78M05 Output Voltage vs. Temperature**

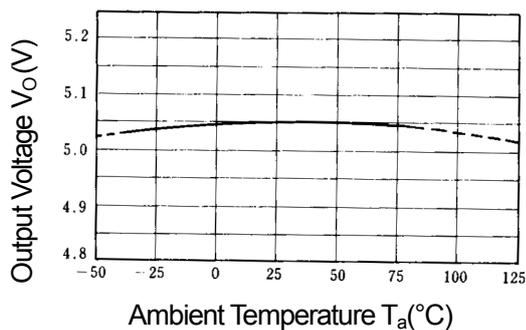

**NJM78M05/M15/M24 Thermal Shutdown Characteristics**  
( $I_o=0mA$ )

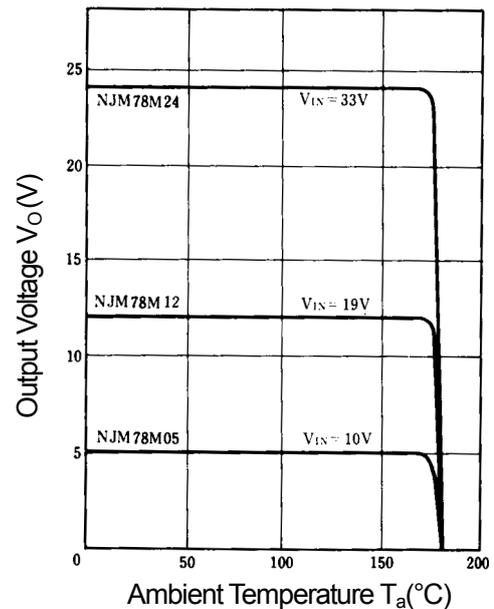


# NJM78M00

## ■ TYPICAL CHARACTERISTICS


### NJM78M05/15/24 Ripple Rejection

( $T_j=25^\circ\text{C}$ ,  $I_o=0.35\text{A}$ ,  $e_{in}=1\text{V}_{P-P}$ )

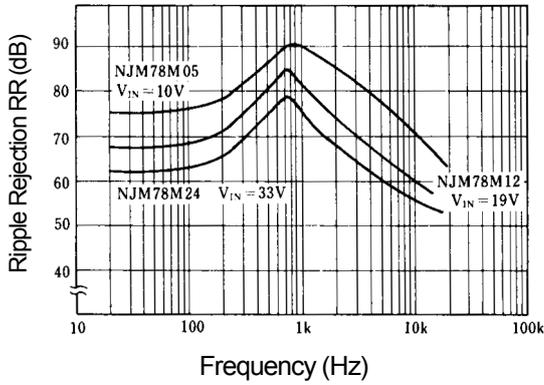


### NJM78M05 Dropout Characteristics

( $T_j=25^\circ\text{C}$ )

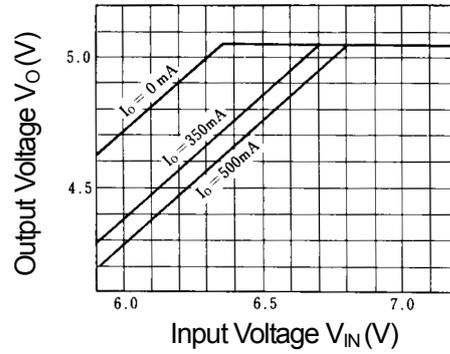


### NJM78M09 Dropout Characteristics

( $T_j=25^\circ\text{C}$ )

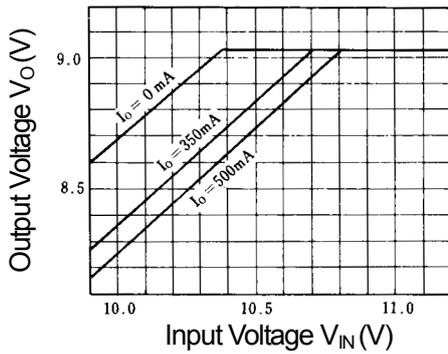


### NJM78M12 Dropout Characteristics

( $T_j=25^\circ\text{C}$ )

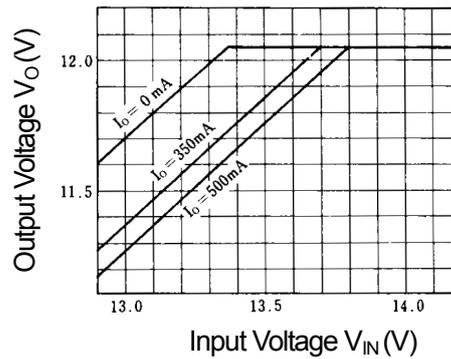


### NJM78M00 Series Short Circuit Output Current

( $T_j=25^\circ\text{C}$ ,  $\infty$  Heat Sink)

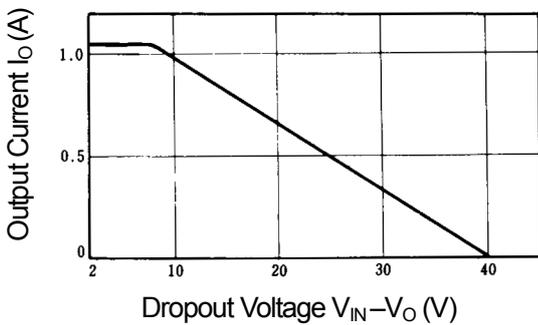

### NJM78M00 Series Equivalent Series Resistance vs. Output Current

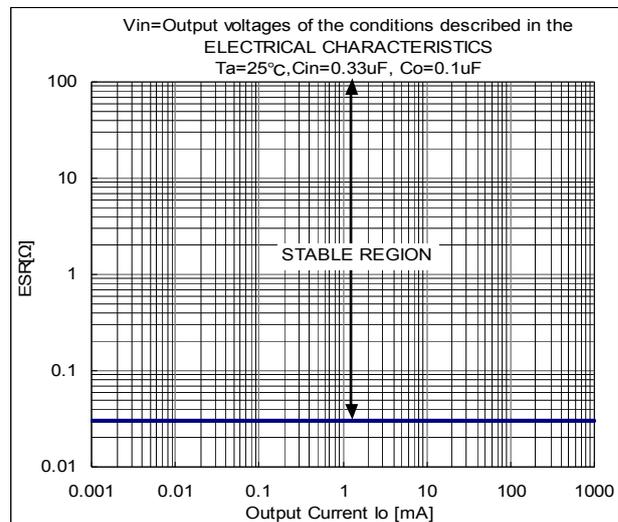

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.