



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Low Noise, Rail-to-Rail Output Dual CMOS Operational Amplifier

■ GENERAL DESCRIPTION

The NJU7029 is a dual CMOS operational amplifier with a low noise of $VNI=13nV/\sqrt{Hz}$ (typ. @ $f=1kHz$), Rail-to-Rail output and low operating voltage. It offers a single supply voltage operation from +2.2V to +5.5V, rail-to-rail output swing in both supply rails and input voltage range from ground. Further the NJU7029 has a low bias current of 1pA, which makes it well-suited for current sense amplifiers such as an acceleration sensor, shock sensor and photodiode amplifier. The NJU7029 is available in small surface mount packages of SSOP8, MSOP8 (TVSP8) and an ultra small lead-less package of ESON8 which allows high-density mounting.

■ FEATURES

Low Noise

- Voltage Noise $13nV/\sqrt{Hz}$ (typ.) @ $f=1kHz$
 $3\mu V_{rms}$ (max.) @ $f=100Hz\sim 20kHz$

Easy to Use

- Gain Bandwidth 3MHz
- Slew Rate $1V/\mu s$ (typ.) @ $R_L=50k\Omega$
- I_{source} / I_{sink} 200 μA
- Specified for +5V, +3V and +2.2V operation

CMOS Process

- Input Bias Current 1pA (typ.)
- Rail-to-Rail Output


- Offset Voltage 5mV (max.)
- Offset Voltage Drift $2\mu V/^\circ C$ (typ.)
- Supply Range 2.2V ~ 5.5V
- Supply Current 850 μA /all ch (typ.) @ $V_{DD}=+5V$
- Package SSOP8, ESON8

MSOP8 (TVSP8) MEET JEDEC MO-187-DA / THIN TYPE


■ Application

- Shock sensors, Accelerometers
- Charge amplifiers
- Photodiode amplifiers
- Low noise signal processing applications
- Microphone amplifiers


■ PIN CONFIGURATION

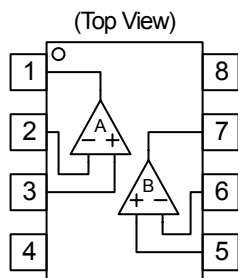

NJU7029V
NJU7029RB1

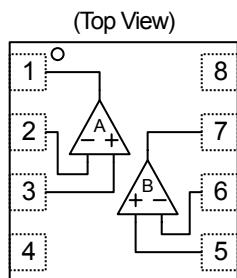

NJU7029KU1

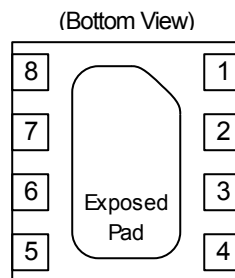

1. A OUTPUT
2. A -INPUT
3. A +INPUT
4. GND(V)
5. B +INPUT
6. B -INPUT
7. B OUTPUT
8. V_{DD}


About Exposed Pad

Connect the Exposed Pad on the GND.

■ PACKAGE OUTLINE



■ Typical Application Circuit

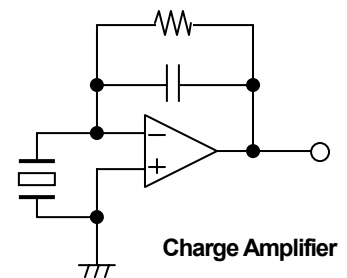

NJU7029

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|----------------------------------|------------------|--|------|
| Supply Voltage | V _{DD} | +7 | V |
| Common Mode Input Voltage Range | V _{ICM} | -0.3~+7 (Note1) | V |
| Differential Input Voltage Range | V _{ID} | ±7 (Note1) | V |
| Power Dissipation | P _D | SSOP8:330 (Note2) MSOP8(TVSP8):410 (Note2) ESON8:360 (Note2) | mW |
| Operating Temperature Range | Topr | -40~+85 | °C |
| Storage Temperature Range | Tstg | -55~+125 | °C |

(Note 1) For supply voltage less than 7V, the absolute maximum input voltage is equal to the supply voltage.

(Note 2) On the PCB "EIA/JEDEC (76.2x114.3x1.6mm, two layers FR-4)"

Refer to following Figure 1 for a permissible loss when ambient temperature (Ta) is Ta≥25°C.

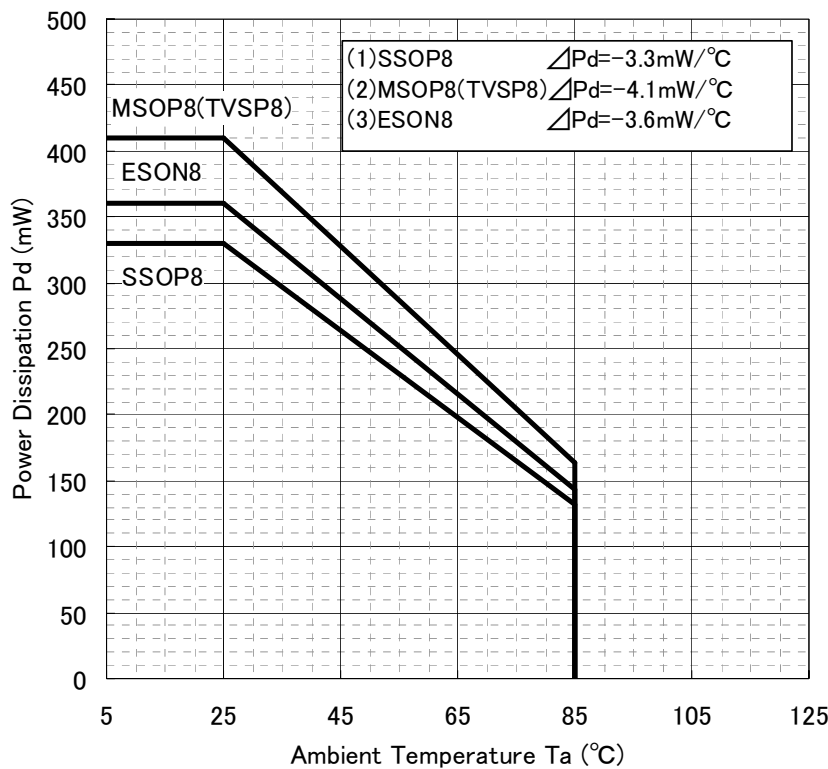


Figure 1 Power Dissipation vs. Ambient Temperature

■ OPERATING VOLTAGE (Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|----------------|-----------------|----------------|------|------|------|------|
| Supply Voltage | V _{DD} | | 2.2 | - | 5.5 | V |

■ +5V ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS ($V_{DD}=5V$, $T_a=25^\circ C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|--------------------------|--|------|------|------|------------------|
| Operating Current | I_{DD} | No Signal | - | 850 | 1150 | μA |
| Input offset Voltage | V_{IO} | | - | 2 | 5 | mV |
| Input Offset Voltage Drift | $\Delta V_{IO}/\Delta T$ | $V_{IN}=V_{DD}/2$, $T_a=-40^\circ C \sim +85^\circ C$ | - | 2 | - | $\mu V/^\circ C$ |
| Input Bias Current | I_B | | - | 1 | - | pA |
| Input Offset Current | I_{IO} | | - | 1 | - | pA |
| Large Signal Voltage Gain | A_V | $R_L=50k\Omega$ to 2.5V, $V_o=2.5V \pm 2V$ | 65 | 80 | - | dB |
| Common Mode Rejection Ratio | CMR | $V_{ICM}=0V \sim 4.1V$ | 65 | 80 | - | dB |
| Supply Voltage Rejection Ratio | SVR | $2.2V \leq V_{DD} \leq 5.5V$ | 65 | 80 | - | dB |
| Output Voltage1 | V_{OH1} | $R_L=50k\Omega$ to 2.5V | 4.9 | - | - | V |
| | V_{OL1} | $R_L=50k\Omega$ to 2.5V | - | - | 0.1 | V |
| Output Voltage2 | V_{OH2} | $I_{source}=200\mu A$ | 4.8 | - | - | V |
| | V_{OL2} | $I_{sink}=200\mu A$ | - | - | 0.2 | V |
| Input Common Mode Voltage Range | V_{ICM} | CMR \geq 65dB | 0 | - | 4.1 | V |

●AC CHARACTERISTICS ($V_{DD}=5V$, $T_a=25^\circ C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------|-------------|--|------|------|------|----------------|
| Unity Gain Frequency | f_T | $G_v=40dB$, $R_L=50k\Omega$ to 2.5V, $C_L=10pF$ | - | 3 | - | MHz |
| Equivalent Input Noise Voltage | V_{NI} | $G_v=40dB$, $R_L=50k\Omega$ to 2.5V, $f=1kHz$, | - | 13 | - | nV/\sqrt{Hz} |
| | V_{NIrms} | $G_v=40dB$, $R_L=50k\Omega$ to 2.5V BPW=100Hz~20kHz | - | 1.7 | 3 | μV_{rms} |
| Total Harmonic Distortion | THD | $G_v=20dB$, $R_L=50k\Omega$ to 2.5V, $f_{in}=1kHz$, $V_{out}=3V_{pp}$, BPW=400Hz~80kHz | - | 0.01 | - | % |
| Channel separation | CS | $f=1kHz$ | - | 130 | - | dB |

●TRANSIENT CHARACTERISTICS ($V_{DD}=5V$, $T_a=25^\circ C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-----------|--------|--|------|------|------|-----------|
| Slew Rate | SR | $G_v=0dB$, $R_T=50\Omega$ to 2.5V, $R_L=50k\Omega$ to 2.5V, $C_L=15pF$ | - | 1 | - | $V/\mu s$ |

■ +3V ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS ($V_{DD}=3V, T_a=25^{\circ}C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|--------------------------|---|------|------|------|-------------|
| Operating Current | I_{DD} | No Signal | - | 610 | 950 | μA |
| Input offset Voltage | V_{IO} | | - | 2 | 5 | mV |
| Input Offset Voltage Drift | $\Delta V_{IO}/\Delta T$ | $V_{IN}=V_{DD}/2, T_a=-40^{\circ}C\sim+85^{\circ}C$ | - | 2 | - | $\mu V/deg$ |
| Input Bias Current | I_B | | - | 1 | - | pA |
| Input Offset Current | I_{IO} | | - | 1 | - | pA |
| Large Signal Voltage Gain | A_V | $R_L=50k\Omega$ to 1.5V, $V_o=1.5V\pm 1V$ | 65 | 80 | - | dB |
| Common Mode Rejection Ratio | CMR | $V_{ICM}=0V\sim 2.1V$ | 65 | 80 | - | dB |
| Supply Voltage Rejection Ratio | SVR | $2.2V\leq V_{DD}\leq 5.5V$ | 65 | 80 | - | dB |
| Output Voltage1 | V_{OH1} | $R_L=50k\Omega$ to 1.5V | 2.9 | - | - | V |
| | V_{OL1} | $R_L=50k\Omega$ to 1.5V | - | - | 0.1 | V |
| Output Voltage2 | V_{OH2} | $I_{source}=200\mu A$ | 2.8 | - | - | V |
| | V_{OL2} | $I_{sink}=200\mu A$ | - | - | 0.2 | V |
| Input Common Mode Voltage Range | V_{ICM} | CMR \geq 65dB | 0 | - | 2.1 | V |

●AC CHARACTERISTICS ($V_{DD}=3V, T_a=25^{\circ}C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------|-------------|--|------|------|------|----------------|
| Unity Gain Frequency | f_T | $G_v=40dB, R_L=50k\Omega$ to 1.5V, $C_L=10pF$ | - | 3 | - | MHz |
| Equivalent Input Noise Voltage | V_{NI} | $G_v=40dB, R_L=50k\Omega$ to 1.5V, $f=1kHz$ | - | 13 | - | nV/\sqrt{Hz} |
| | V_{NIrms} | $G_v=40dB, R_L=50k\Omega$ to 1.5V, $BPW=100Hz\sim 20kHz$ | - | 1.7 | 3 | $\mu Vrms$ |
| Total Harmonic Distortion | THD | $G_v=20dB, R_L=50k\Omega$ to 1.5V, $f_{in}=1kHz, V_{out}=1V_{pp}, BPW=400Hz\sim 80kHz$ | - | 0.02 | - | % |
| Channel separation | CS | $f=1kHz$ | - | 120 | - | dB |

●TRANSIENT CHARACTERISTICS ($V_{DD}=3V, T_a=25^{\circ}C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-----------|--------|--|------|------|------|-----------|
| Slew Rate | SR | $G_v=0dB, R_T=50\Omega$ to 1.5V, $R_L=50k\Omega$ to 1.5V, $C_L=15pF$ | - | 1 | - | $V/\mu s$ |

■ +2.2V ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS ($V_{DD}=2.2V, T_a=25^\circ C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|--------------------------|---|------|------|------|-------------|
| Operating Current | I_{DD} | No Signal | - | 550 | 890 | μA |
| Input offset Voltage | V_{IO} | | - | 2 | 5 | mV |
| Input Offset Voltage Drift | $\Delta V_{IO}/\Delta T$ | $V_{IN}=V_{DD}/2, T_a=-40^\circ C \sim +85^\circ C$ | - | 2 | - | $\mu V/deg$ |
| Input Bias Current | I_B | | - | 1 | - | pA |
| Input Offset Current | I_{IO} | | - | 1 | - | pA |
| Large Signal Voltage Gain | A_V | $R_L=50k\Omega$ to 1.5V, $V_o=1.1V \pm 0.5V$ | 60 | 80 | - | dB |
| Common Mode Rejection Ratio | CMR | $V_{ICM}=0V \sim 1.3V$ | 60 | 80 | - | dB |
| Supply Voltage Rejection Ratio | SVR | $2.2V \leq V_{DD} \leq 5.5V$ | 65 | 80 | - | dB |
| Output Voltage1 | V_{OH1} | $R_L=50k\Omega$ to 1.1V | 2.1 | - | - | V |
| | V_{OL1} | $R_L=50k\Omega$ to 1.1V | - | - | 0.1 | V |
| Output Voltage2 | V_{OH2} | $I_{source}=200\mu A$ | 2.0 | - | - | V |
| | V_{OL2} | $I_{sink}=200\mu A$ | - | - | 0.2 | V |
| Input Common Mode Voltage Range | V_{ICM} | CMR \geq 60dB | 0 | - | 1.3 | V |







●AC CHARACTERISTICS ($V_{DD}=2.2V, T_a=25^\circ C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------|-------------|--|------|------|------|----------------|
| Unity Gain Frequency | f_T | $G_v=40dB, R_L=50k\Omega$ to 1.1V, $C_L=10pF$ | - | 3 | - | MHz |
| Equivalent Input Noise Voltage | V_{NI} | $G_v=40dB, R_L=50k\Omega$ to 1.1V, $f=1kHz$ | - | 13 | - | nV/\sqrt{Hz} |
| | V_{NIrms} | $G_v=40dB, R_L=50k\Omega$ to 1.1V, $BPW=100Hz \sim 20kHz$ | - | 1.7 | 3 | $\mu Vrms$ |
| Total Harmonic Distortion | THD | $G_v=20dB, R_L=50k\Omega$ to 1.1V, $f_{in}=1kHz, V_{out}=0.5Vpp, BPW=400Hz \sim 80kHz$ | - | 0.02 | - | % |
| Channel separation | CS | $f=1kHz$ | - | 115 | - | dB |

●TRANSIENT CHARACTERISTICS ($V_{DD}=2.2V, T_a=25^\circ C$)


| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-----------|--------|--|------|------|------|-----------|
| Slew Rate | SR | $G_v=0dB, R_T=50\Omega$ to 1.1V, $R_L=50k\Omega$ to 1.5V, $C_L=15pF$ | - | 1 | - | $V/\mu s$ |

TYPICAL CHARACTERISTICS

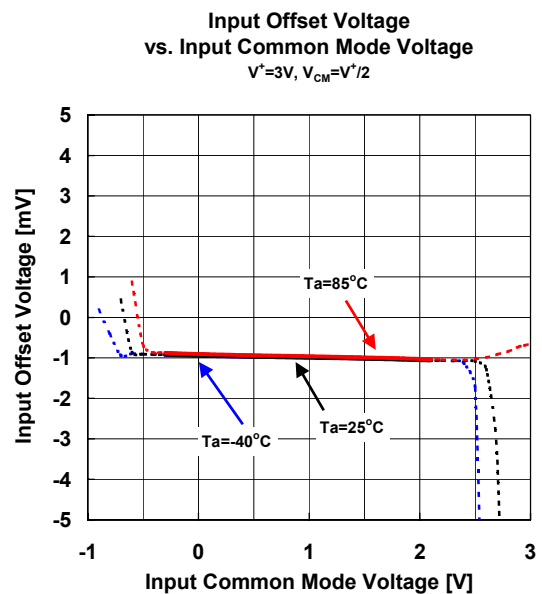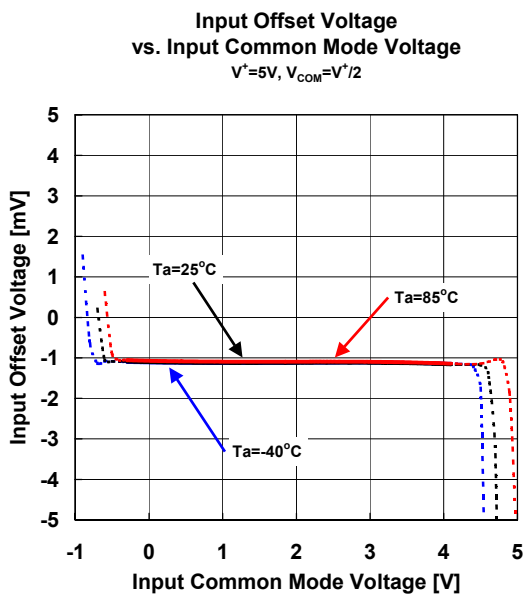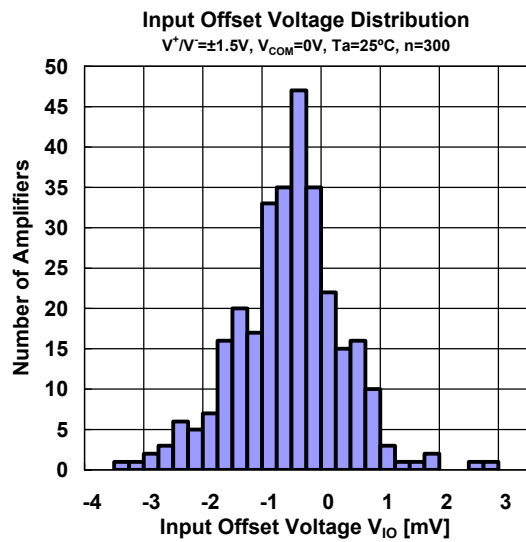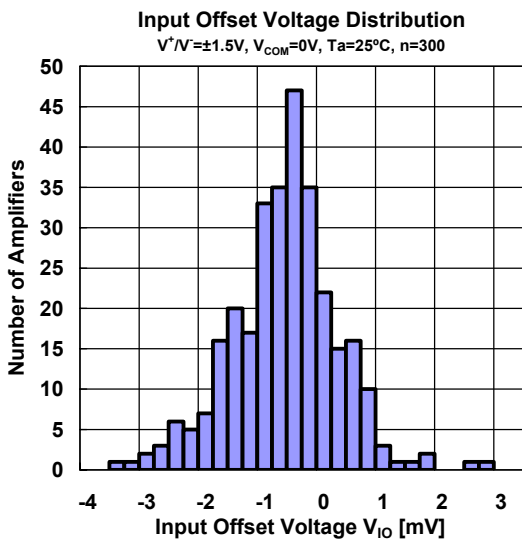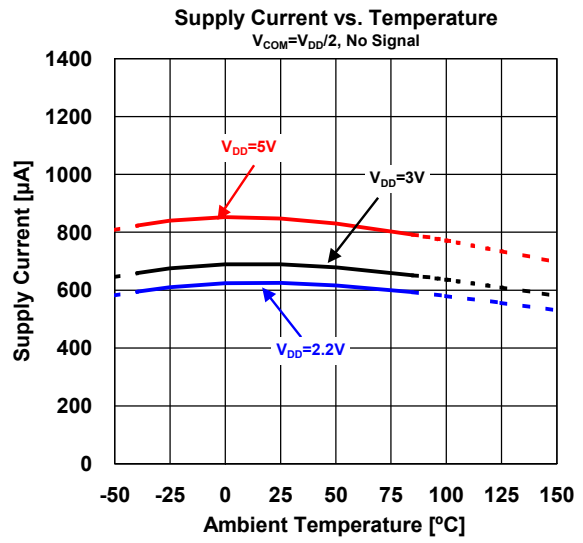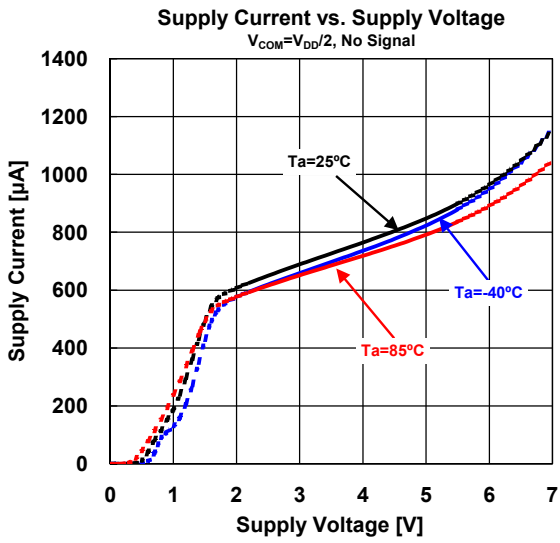


■ TYPICAL CHARACTERISTICS


Input Offset Voltage vs. Input Common Mode Voltage
 $V^+ = 2.2V, V_{COM} = V^+/2$

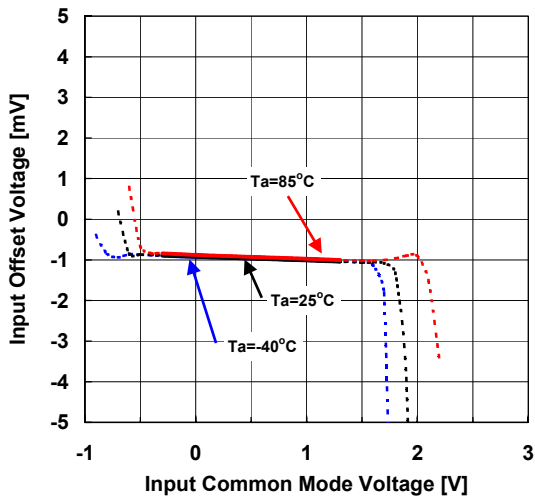


Common Mode Rejection Ratio vs. Ambient Temperature
 $V_{ICM} = 0V \text{ to } V^+ - 0.9V, V_{COM} = V^+/2$

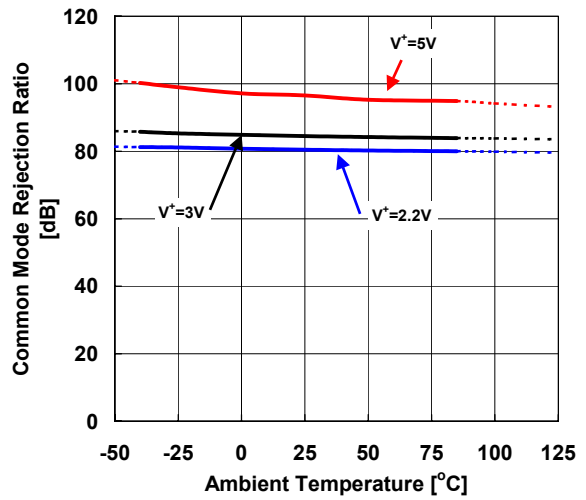


Supply Voltage Rejection Ratio vs. Ambient Temperature
 $V^+ = 2.2V \text{ to } 5.5V, V_{ICM} = V^+/2, V_{COM} = V^+/2$

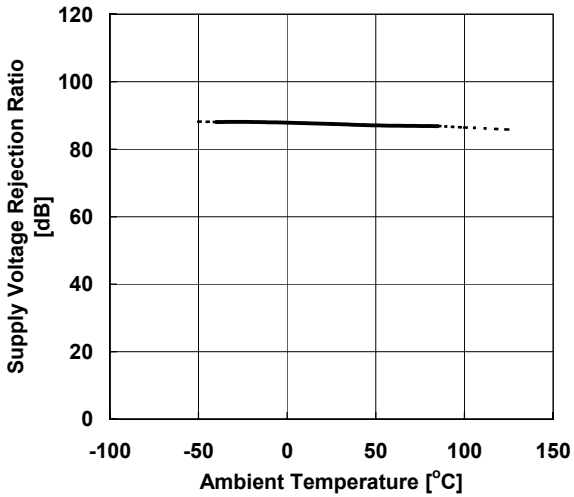


Maximum Output Voltage vs. Supply Voltage
 $V_{IN} = \pm 0.5V, V_{COM} = 0V, R_L = 50k\Omega$

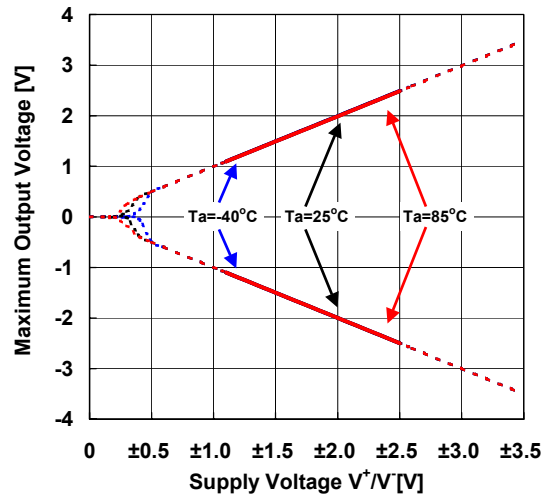

Maximum Output Voltage vs. Ambient Temperature
 $R_L = 50k\Omega \text{ to } V_{COM}$

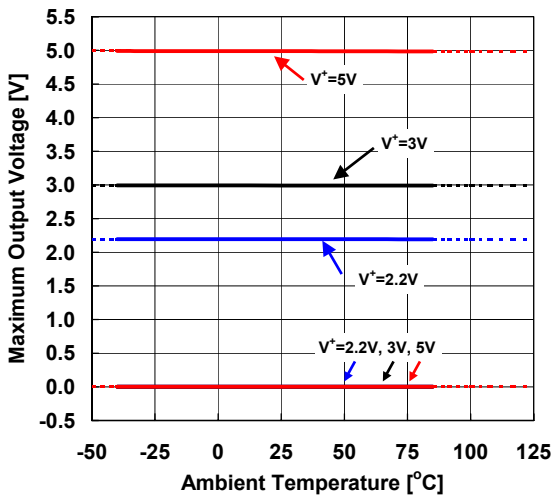


Maximum Output Voltage vs. Ambient Temperature
 $R_L = 10k\Omega \text{ to } V_{COM}$

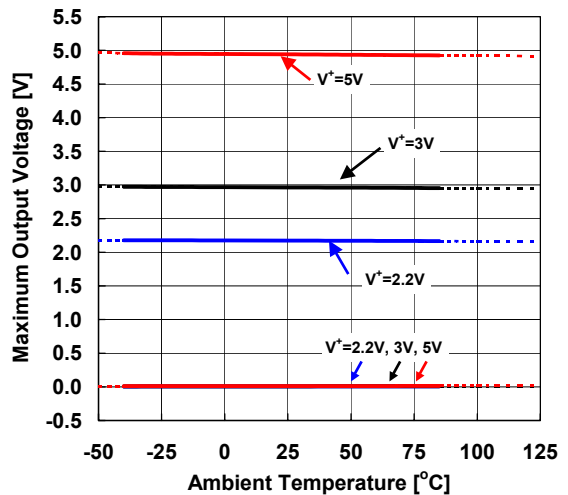


■ TYPICAL CHARACTERISTICS


Maximum Output Voltage vs. Load Resistance
 $V^+V^- = \pm 2.5V, V_{IN}^+ = \pm 0.1V, V_{IN}^- = 0V, V_{COM} = 0V$

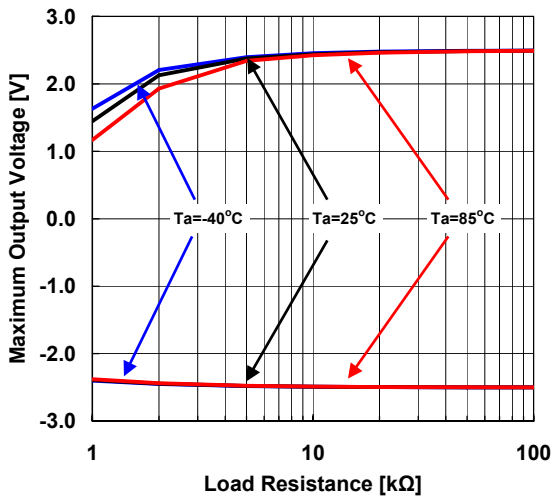


Maximum Output Voltage vs. Load Resistance
 $V^+V^- = \pm 1.5V, V_{IN}^+ = \pm 0.1V, V_{IN}^- = 0V, V_{COM} = 0V$

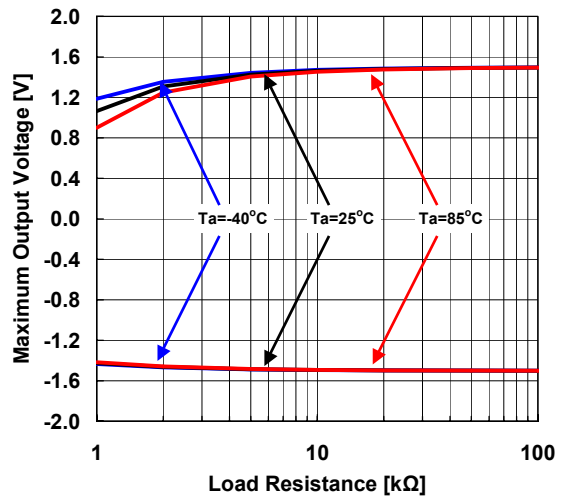


Maximum Output Voltage vs. Load Resistance
 $V^+V^- = \pm 1.1V, V_{IN}^+ = \pm 0.1V, V_{IN}^- = 0V, V_{COM} = 0V$

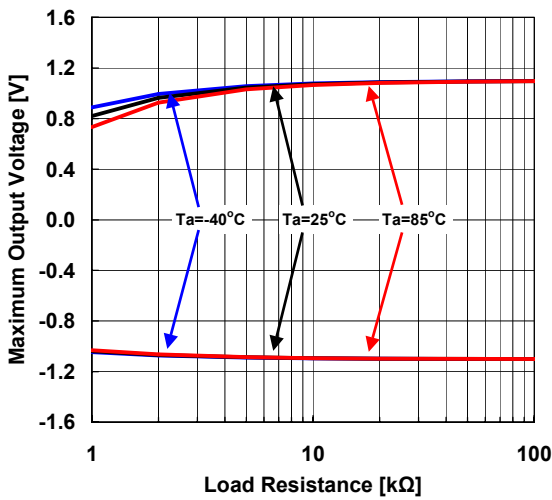


Maximum Output Voltage vs. Output Current
 $V^+ = 5V$

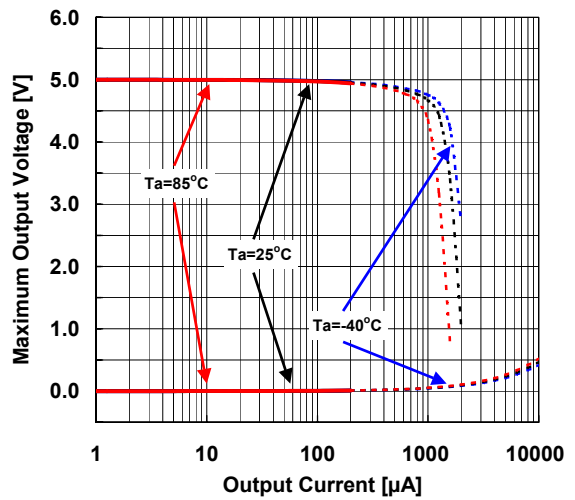

Maximum Output Voltage vs. Output Current
 $V^+ = 3V$

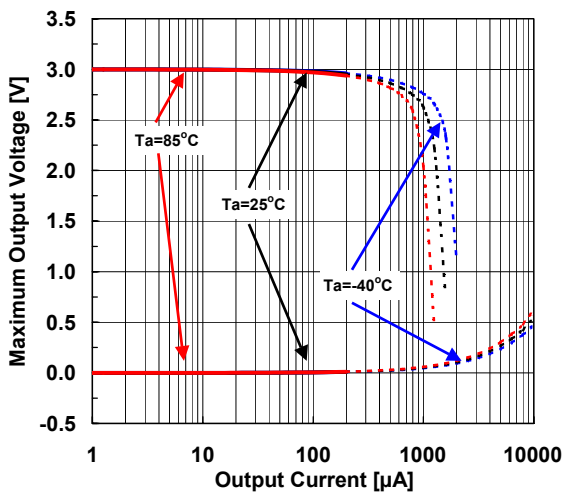


Maximum Output Voltage vs. Output Current
 $V^+ = 2.2V$

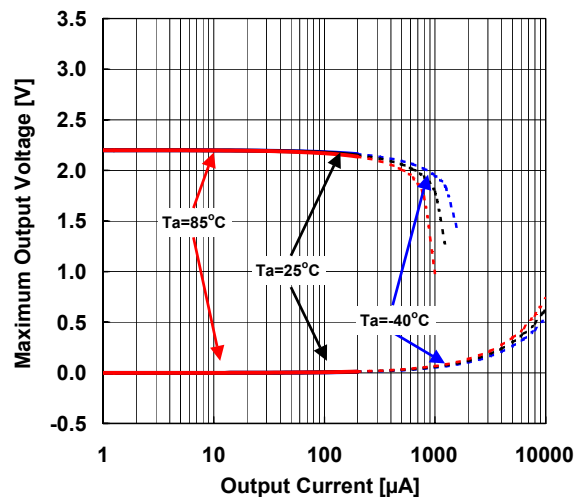

■ TYPICAL CHARACTERISTICS


40dB Gain/Phase vs. Frequency

$V^+=5V, V_{COM}=V^+/2, G_V=40dB, R_T=50\Omega, R_L=50k\Omega, C_L=15pF$

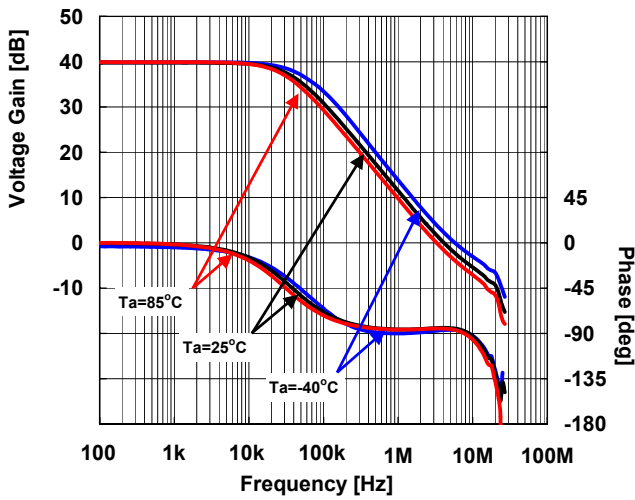


40dB Gain/Phase vs. Frequency

$V^+=5V, V_{COM}=V^+/2, G_V=40dB, R_S=50\Omega, R_L=50k\Omega, T_a=25^\circ C$

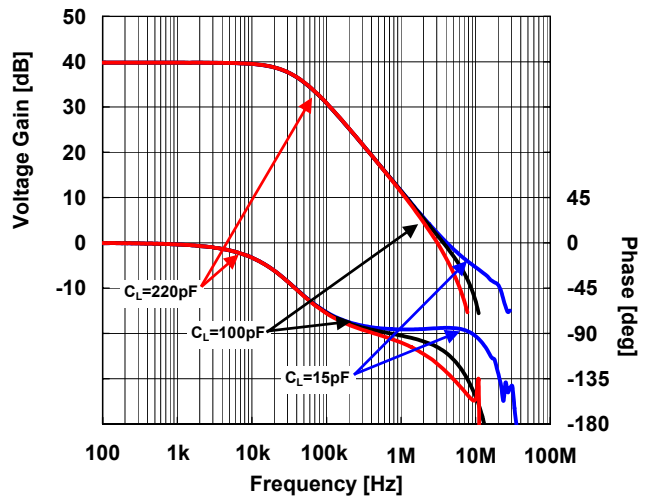


40dB Gain/Phase vs. Frequency

$V^+=3V, V_{COM}=V^+/2, G_V=40dB, R_T=50\Omega, R_L=50k\Omega, C_L=15pF$

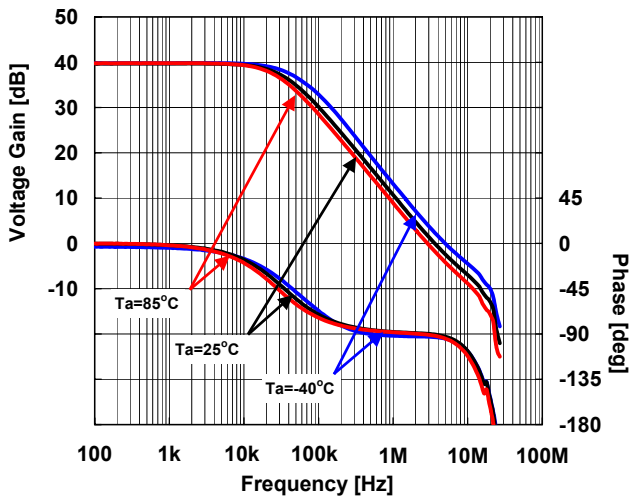


40dB Gain/Phase vs. Frequency

$V^+=3V, V_{COM}=V^+/2, G_V=40dB, R_S=50\Omega, R_L=50k\Omega, T_a=25^\circ C$

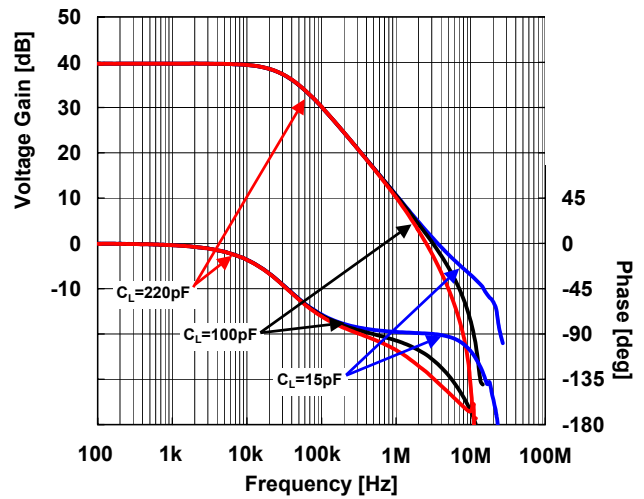


40dB Gain/Phase vs. Frequency

$V^+=2.2V, V_{COM}=V^+/2, G_V=40dB, R_T=50\Omega, R_L=50k\Omega, C_L=15pF$




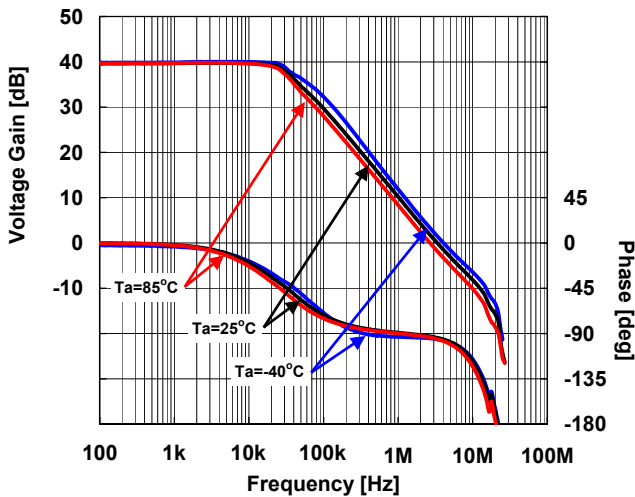


40dB Gain/Phase vs. Frequency

$V^+=2.2V, V_{COM}=V^+/2, G_V=40dB, R_S=50\Omega, R_L=50k\Omega, T_a=25^\circ C$

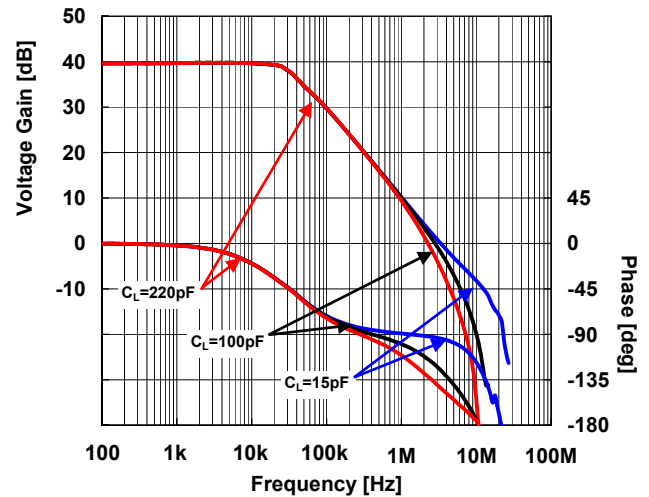


■ TYPICAL CHARACTERISTICS

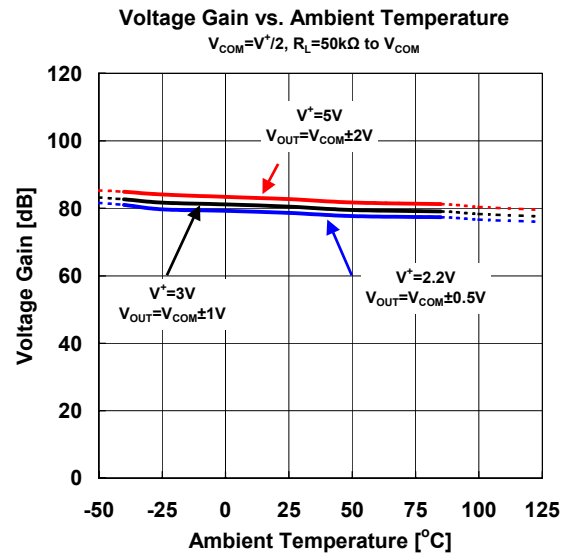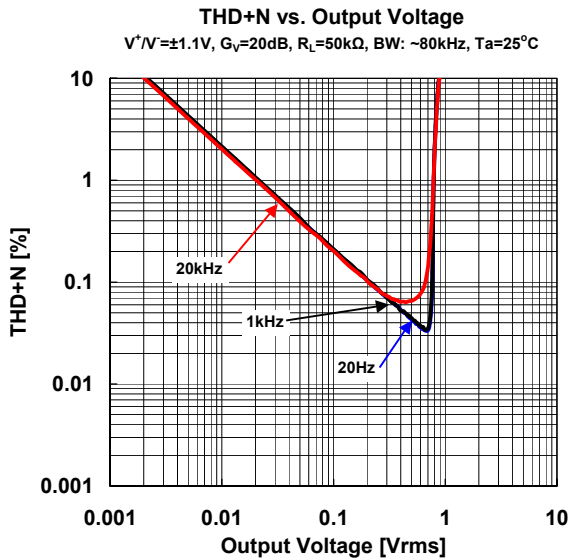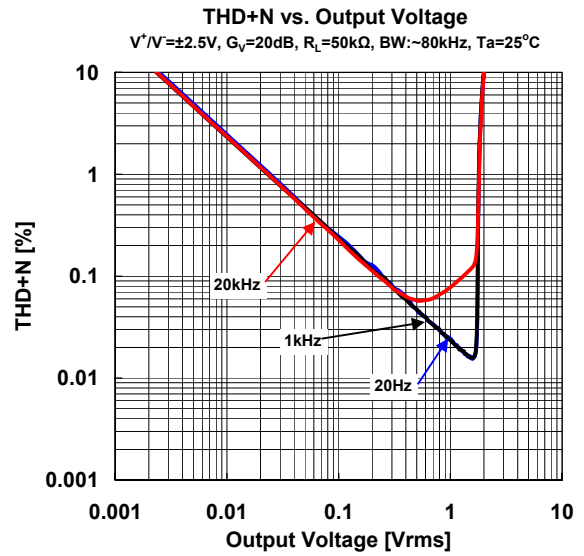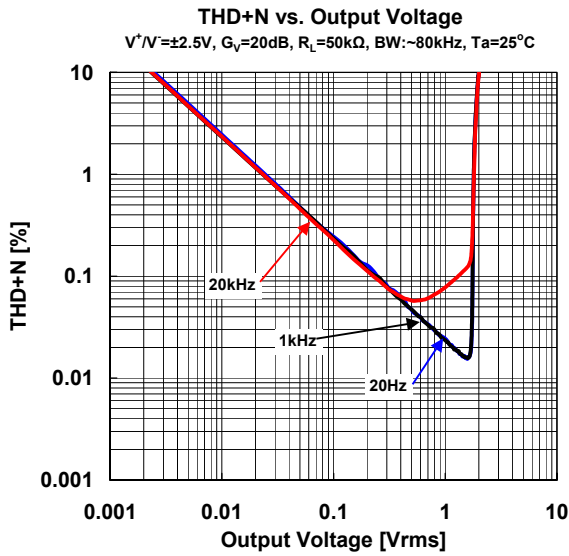

■ TYPICAL CHARACTERISTICS


Pulse Response

$V^*=5V, V_{COM}=V^*/2, V_{IN}=4V_{PP}, f_{IN}=100kHz, C_L=15pF, T_a=25^\circ C$

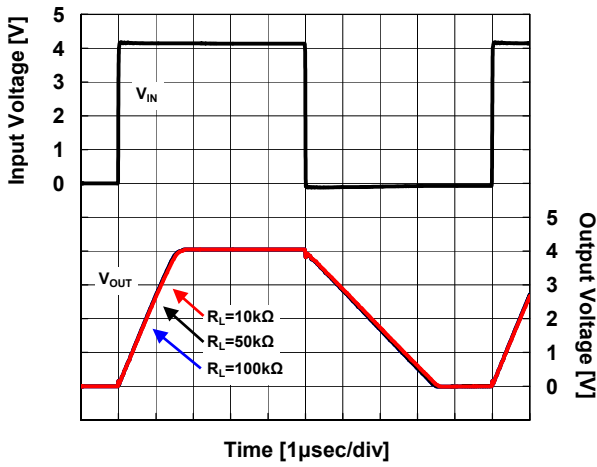


Pulse Response

$V^*=5V, V_{COM}=V^*/2, V_{IN}=4V_{PP}, f_{IN}=100kHz, R_L=50k\Omega, T_a=25^\circ C$

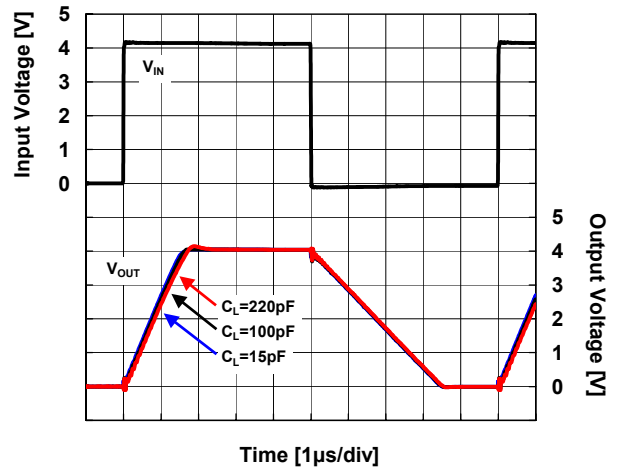


Pulse Response

$V^*=5V, V_{COM}=V^*/2, V_{IN}=4V_{PP}, f_{IN}=100kHz, R_L=50k\Omega, T_a=25^\circ C$

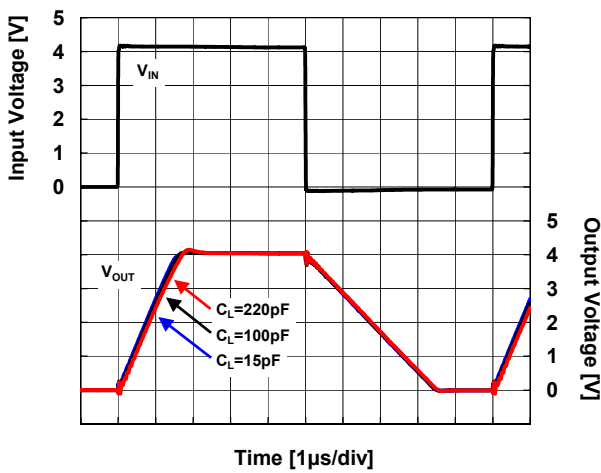


Pulse Response

$V^*=3V, V_{COM}=V^*/2, V_{IN}=2V_{PP}, f_{IN}=100kHz, C_L=15pF, T_a=25^\circ C$

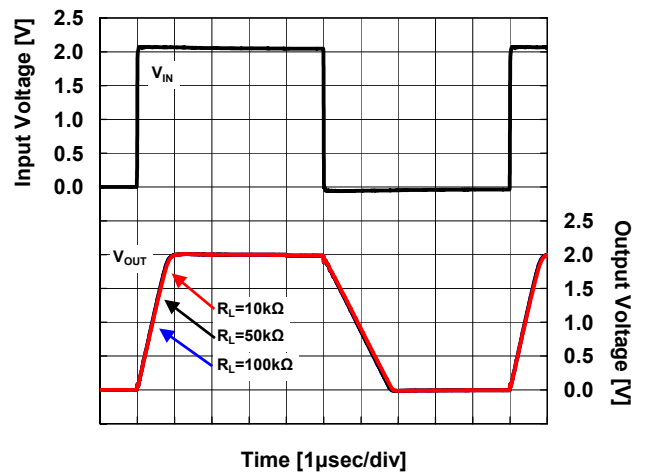


Pulse Response

$V^*=3V, V_{COM}=V^*/2, V_{IN}=2V_{PP}, f_{IN}=100kHz, R_L=50k\Omega, T_a=25^\circ C$

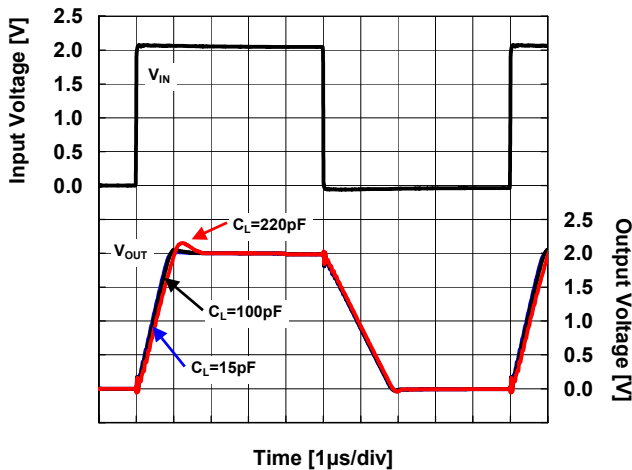

Pulse Response


$V^*=3V, V_{COM}=V^*/2, V_{IN}=2V_{PP}, f_{IN}=100kHz, R_L=50k\Omega, T_a=25^\circ C$

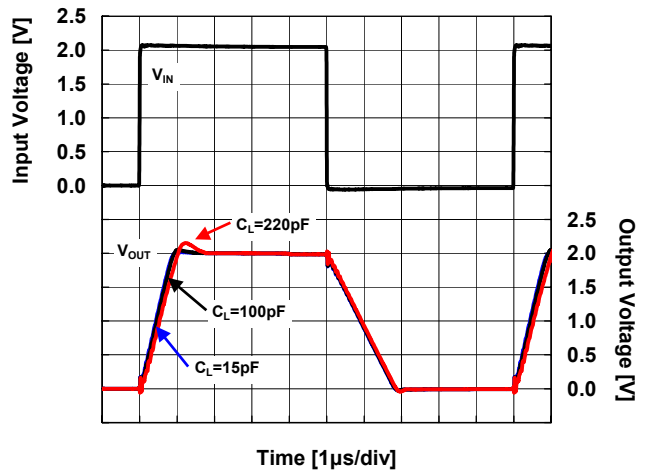

■ TYPICAL CHARACTERISTICS


Pulse Response

$V^+=2.2V, V_{COM}=V^+/2, V_{IN}=1V_{PP}, f_{IN}=100kHz, C_L=15pF, T_a=25^\circ C$

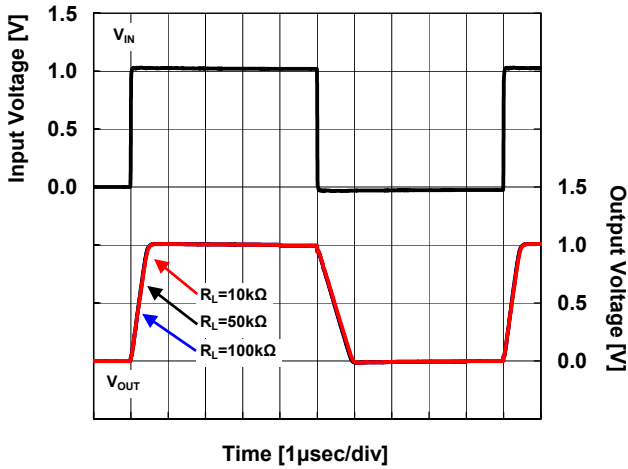


Pulse Response

$V^+=2.2V, V_{COM}=V^+/2, V_{IN}=1V_{PP}, f_{IN}=100kHz, R_L=50k\Omega, T_a=25^\circ C$

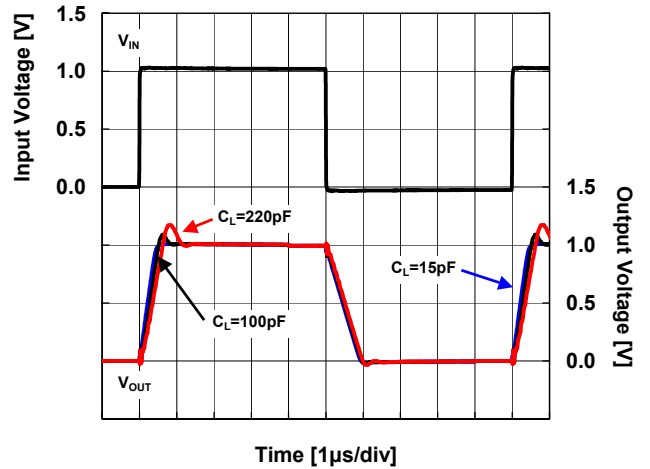


Pulse Response

$V^+=2.2V, V_{COM}=V^+/2, V_{IN}=1V_{PP}, f_{IN}=100kHz, R_L=50k\Omega, T_a=25^\circ C$

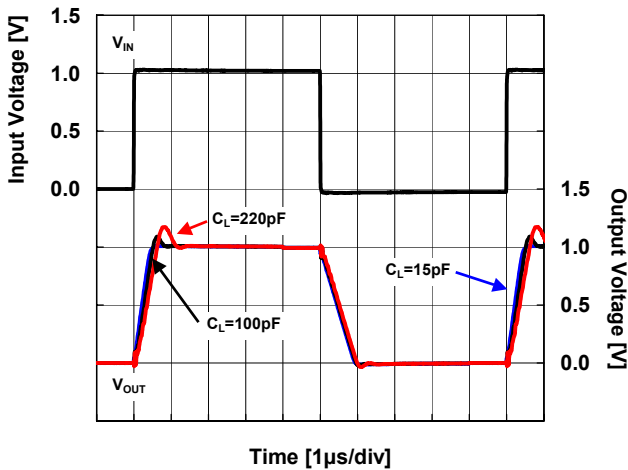


Slew Rate vs. Ambient Temperature

$V^+/V^-\pm 2.5V, G_v=0dB, R_T=50\Omega, R_L=50k\Omega, C_L=15pF, V_{IN}=2V_{PP}, f_{IN}=1kHz, V_{COM}=0V$

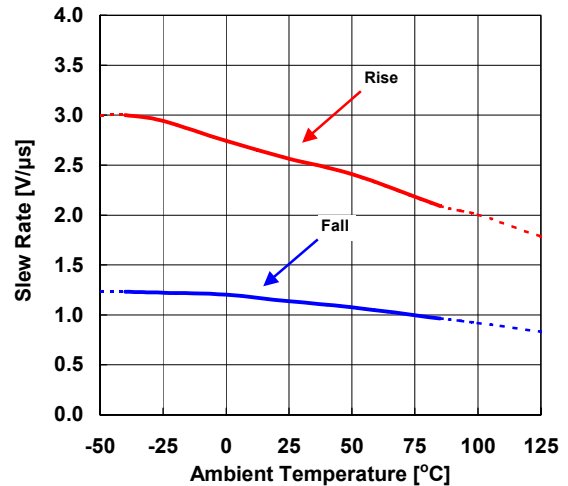


Slew Rate vs. Ambient Temperature

$V^+/V^-\pm 1.5V, G_v=0dB, R_T=50\Omega, R_L=50k\Omega, C_L=15pF, V_{IN}=1V_{PP}, f_{IN}=1kHz, V_{COM}=0V$




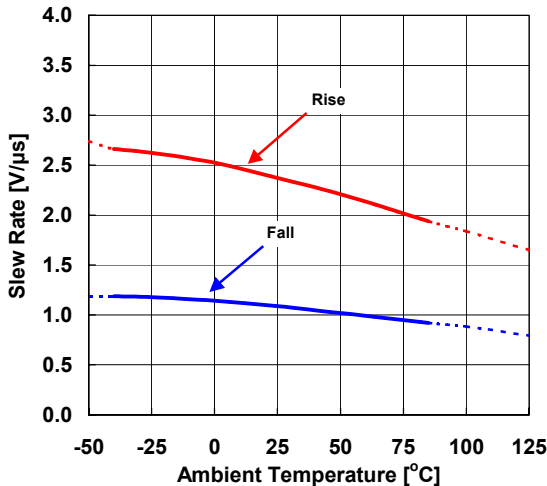


Slew Rate vs. Ambient Temperature

$V^+/V^-\pm 1.1V, G_v=0dB, R_T=50\Omega, R_L=50k\Omega, C_L=15pF, V_{IN}=1V_{PP}, f_{IN}=1kHz, V_{COM}=0V$

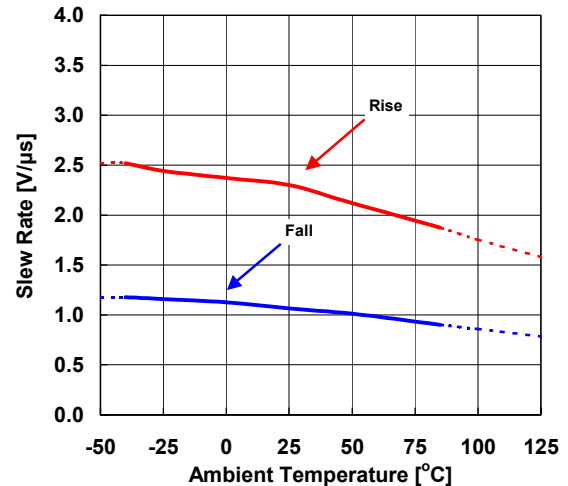

■ TYPICAL CHARACTERISTICS

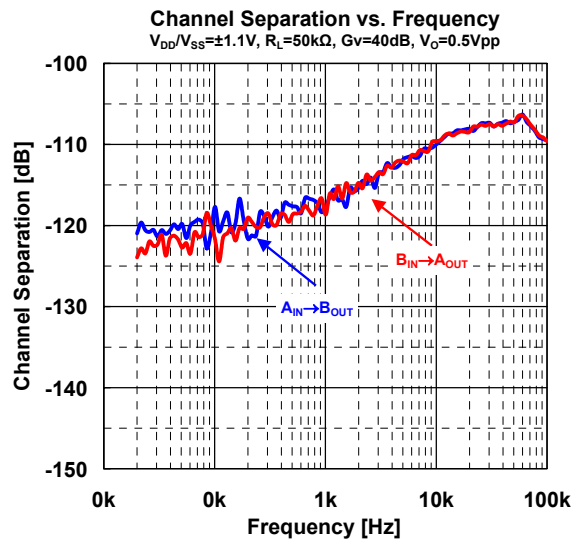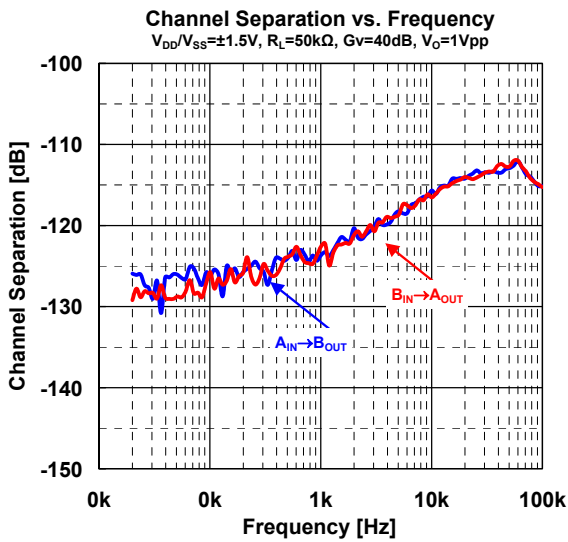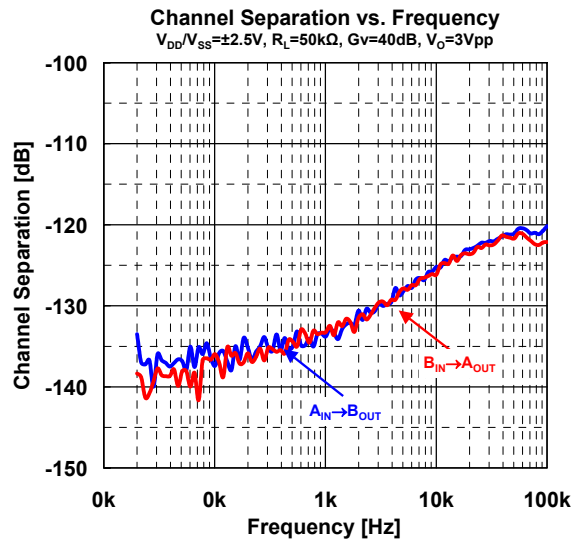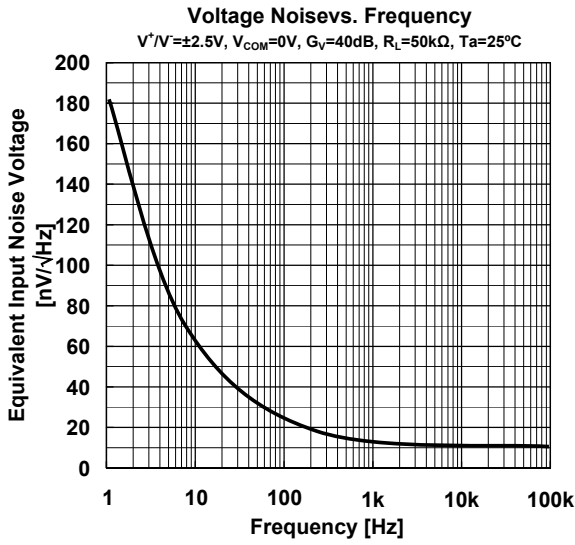

[CAUTION]

The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.