



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	DESCRIPTION	WEIGHT
NK388M**Y	CATEGORY 3 KEYSTONE MODULE: 8 POSITION, 8 WIRE WITH TERMINATION CAP COLOR CODED FOR T568A AND T568B WIRING SCHEMES.	.66 LB/50 PCS [300 g/50 PCS]
NK366UM**Y	CATEGORY 3 KEYSTONE MODULE: 6 POSITION, 6 WIRE WITH TERMINATION CAP COLOR CODED FOR USOC WIRING SCHEME.	
NK366M**Y	CATEGORY 3 KEYSTONE MODULE: 6 POSITION, 6 WIRE	

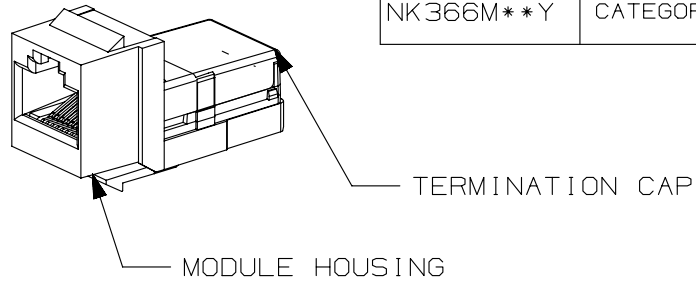

- NOTES:
- SEE CURRENT NETKEY CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
 - MATERIAL:
MODULE HOUSING: ABS
NOMINAL WALL THICKNESS: .078(2.0)
TERMINATION CAP: POLYCARBONATE.
 - ALL 8 POSITION, 8 WIRE CONNECTOR MODULES WILL ACCEPT TWO, THREE OR FOUR PAIR MODULAR PLUGS WITHOUT DAMAGE.
 - DIMENSIONS IN BRACKETS ARE IN METRIC.

PANEL OPENING REQUIREMENTS
 PANEL THICKNESS: .048" - .058"
 (1.22mm - 1.47mm)

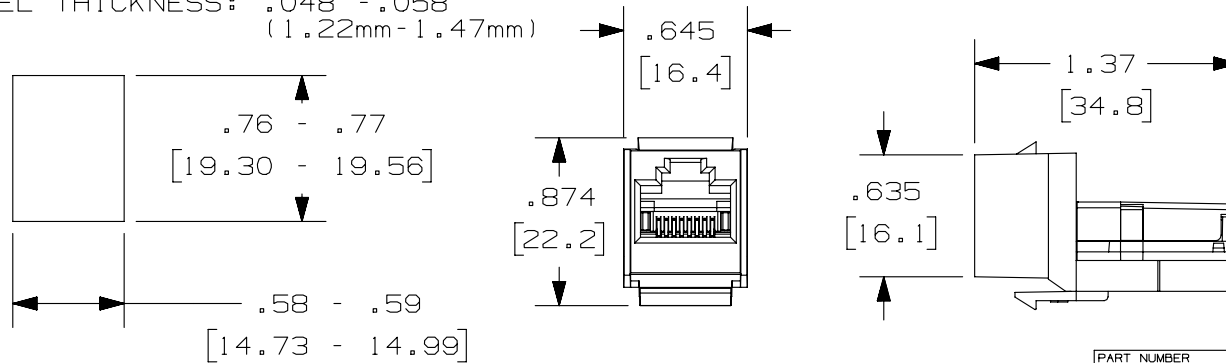

PART NUMBER		NK388M**Y, NK366UM**Y, NK366M**Y	
TITLE			
NETKEY CATEGORY 3 KEYSTONE STYLE MODULE			
CUSTOMER DRAWING			
ITEM REVISION NAME		M02479KX/00	
DATASET FILE NAME		M02479KX_DC285/00B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x ± .xxx ± .010 [.3]		DRAWING NUMBER:	
.xx ± .03 [.8] ANGLES ±		02479-285	
THIRD ANGLE PROJECTION		SHT 1 OF 1	
DRAWN BY	DATE	CHK	SCALE
TA	3/18/06	PBD	NONE
REV	DATE	BY	CHK
1	5/19/14	JSP	REFR
R	3/18/06	TA	PBD

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	5/19/14	JSP	REFR	JCK	A. REVISED DRAWING TITLE BLOCK.	02479-285
R	3/18/06	TA	PBD	PBD	RELEASED TO PRODUCTION	02479-285

D10100DA/14