imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





S2C Link

Serial to Cellular Router





Product Brief

Part Numbers Description

Recommended for Development

NL-S-2GTR	S2C Link, 2G GPRS
NL-S-HSPAR	S2C Link, 3G Global HSPA+, GPS
NL-S-C1G-VR	S2C Link, 4G LTE CAT1, Verizon
NL-S-C4SR	S2C Link, 4G LTE CAT4, Verizon
	and AT&T
Recommended for Production	
NL-S-2GT	S2C Link, 2G 1xRTT, Verizon
NL-S-HSPA	S2C Link, 3G Global HSPA+, GPS
NL-S-C1G-V	S2C Link, 4G LTE CAT1, Verizon
NL-S-C4S	S2C Link, 4G LTE CAT4, Verizon
	and AT&T

NimbeLink's S2C Link™. Get connected fast with a high-value, low price, rugged, plug-n-play serial modem.

"Compact, Simple, Rugged."


Features

- USB and RS-232
- **GPS** on select models
- **Plug-n-play** High-speed connectivity
- Lightweight 2.8 oz
- Compact size 2.7" x 2.2" x 0.7"
- **Rugged** Aircraft grade Aluminum, Temp resistance -40c +85

Advantages

- Flexible and practical
- Modular antenna port
- Flexible mounting options
- Delivers speed and wide coverage (Cellular Technology 2G, 3G, 4G LTE CAT1 and CAT4)
- Flexible powering 5v -32v
- Enables remote device connectivity
- Save money, time and improve business efficiency
- Always on
- Low power consumption
- High-Speed Data Connections
- Development version includes 5V power supply, Antenna(s) and mounting hardware
- Production version includes the S2C Link only. Customer selected Antenna(s), power and mounting options



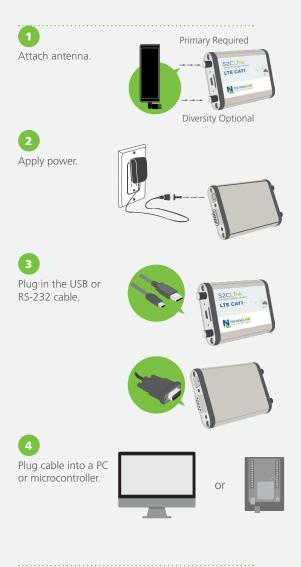

Additional Features

- Cost-effective replacement for landline dialup circuits or obsolete cellular devices – Primary connectivity for PLCs, RTUs, POS, ATM solutions
- High speed data transfer rate
- LED network status indicators
- Optional mounting kit (included in retail package)
- GPS on some models
- Drivers for Windows, Linux, MAC

	1
Wireless WAN	
GSM	GPRS, EDGE - 800/850, 900, AWS, 1900, 2100 MHz
CDMA	1xRTT - 800/1900 MHz
HSPA+	800 (B6), 850 (B5), 900 (B8), AWS1700 (B4), 1900 (B2), 2100 (B1)
LTE	LTE 700 (B17), 850 (B5) AWS1700 (B4) 1900(B2) MHz
	LTE 700 (B13), AWS1700 (B4) MHz
WWAN Embedded Module	Telit 910 Series, Sierra Wireless HL7588, Gemalto ELS31
SIM Slots	1 3FF Micro-SIM Slot
Antenna Connectors	1 x 50 Ω SMA (Center pin: female)
Serial	
Ports	1 RS-232, 1 USB
Connector	DB9, USB Mini-B
Power	
Input	USB, 5-32v VDC (power supply with barrel jack connector included)
Consumption	Typical: 3.5 W; Max: 15 W
General	
LEDs	Power On, WWAN Service
Relative Humidity	5% to 95% (non-condensing)
Approvals	
GSM/CDMA	Verizon ODI, PTCRB
Carrier Certifications	Certified by Verizon, AT&T, and most major carriers



Contact a NimbeLink Sales Professional 612-285-3433

Email Us www.NimbeLink.com/contact-us

Online www.NimbeLink.com