



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SUPER BRIGHT LED NUMERIC DISPLAY (SEVEN SEGMENT DISPLAY)

Stanley's Numeric Displays which incorporate super-bright LEDs produce vivid, brilliant displays. Available colors are red, pure green, green, yellow and orange. Display types include segment type (character heights 7.5mm to 25mm) and the alpha-numeric type (character heights 25mm and 51mm). These are suitable for dynamic drive due to the low-current drive characteristics.

Description of Part Number

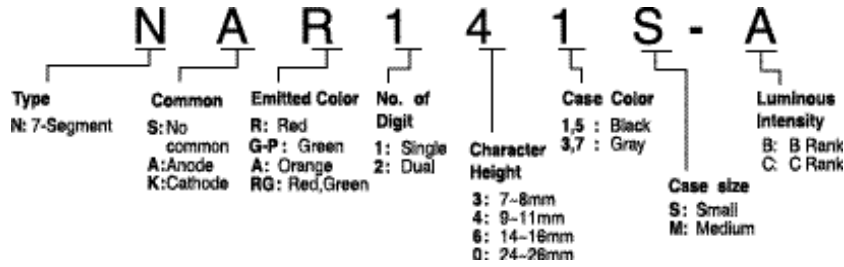

Characteristics by Color

T_a = 25°C

Size	Part No.	Material Emitted Color	Chips/Segment	Absolute Maximum Rating						Electro-Optical Characteristics						Derating ΔIF	
				Power Dissipation Pd	Forward Current IF	Peak Forward Current IFM	Reverse Voltage VR	Operating Temp T _{opr}	Storage Temp T _{stg}	Forward Voltage VF			Reverse Current IR		Wavelength λ _p		
										TYP.	MAX.	IF	MAX.	VR	TYP		IF
7.5	N□R13□	GaP(Red)	1	37.5	15	60	4	-30~+85	-30~+85	2.0	2.5	10	100	4	700	10	0.25
	N□R13□S,ME	GaAlAs(Red)	1	40	20	80	4	-30~+85	-30~+85	1.7	2.0	10	100	4	660	10	0.33
	N□G13□P,SP,MP	GaP(Green)	1	48	20	80	4	-30~+85	-30~+85	2.0	2.4	10	100	4	565	10	0.33
	N□13□S,M	GaAsP(Orange)	1	48	20	80	4	-30~+85	-30~+85	2.0	2.4	10	100	4	605	10	0.33
10	N□R14□,N□R24	GaAlAs(Red)	1	60	30	120	4	-40~+85	-40~+85	1.7	2.0	20	100	4	660	20	0.41
	N□R14□S	GaAlAs(Red)	1	40	20	80	4	-30~+85	-30~+85	1.7	2.0	10	100	4	660	10	0.33
	N□G14□P,N□G24P	GaP(Green)	1	63	25	100	4	-40~+85	-40~+85	2.2	2.5	20	100	4	565	20	0.34
	N□G14□SP	GaP(Green)	1	48	20	80	4	-40~+85	-30~+85	2.0	2.4	10	100	4	565	10	0.33
	N□A14□,N□A24□	GaAsP(Orange)	1	63	25	100	4	-40~+85	-40~+85	2.2	2.5	20	100	4	605	20	0.34
	N□A14□S	GaAsP(Orange)	1	48	20	80	4	-30~+85	-30~+85	2.0	2.4	10	100	4	605	10	0.33
	NARG14□	GaAlAs(Red)	1	36	15	70	4	-30~+70	-30~+80	1.7	2.0	10	20	4	660	10	0.22
		GaP(Green)	1	36	15	70	4	-30~+70	-30~+80	2.0	2.4	10	20	4	570	10	0.22
15	N□R16□,N□R26□	GaAlAs(Red)	1	60	30	120	4	-40~+85	-40~+85	1.7	2.0	20	100	4	660	20	0.41
	N□G16□P,N□G26□P	GaP(Green)	1	63	25	100	4	-40~+85	-40~+85	2.2	2.5	20	100	4	565	20	0.34
	N□A16□,N□A26□	GaAsP(Orange)	1	63	25	100	4	-40~+85	-40~+85	2.2	2.5	20	100	4	605	20	0.34
	NARG16□	GaAlAs(Red)	1	36	15	70	4	-30~+70	-30~+80	1.7	2.0	10	20	4	660	10	0.22
		GaP(Green)	1	36	15	70	4	-30~+70	-30~+80	2.0	2.4	10	20	4	570	10	0.22
25	N□R10□	GaAlAs(Red)	2	120	30	120	4	-20~+85	-20~+85	3.4	4.0	20	100	8	660	20	0.41
	N□G10□P	GaP(Green)	2	126	25	100	4	-20~+85	-20~+85	4.4	5.0	20	100	8	565	20	0.34
	N□A10□	GaAsP(Orange)	2	126	25	100	4	-20~+85	-20~+85	4.4	5.0	20	100	8	605	20	0.34
	NARG10□	GaAlAs(Red)	2	80	20	40	4	-30~+70	-30~+80	3.4	4.0	10	100	4	660	10	0.33
		GaP(Green)	2	96	20	40	4	-30~+70	-30~+80	4.0	4.8	10	100	4	570	10	0.33
Units				mW	mA	mA	V	°C		V	mA	μA	V	nm	mA	mA/°C	

- Number of chips per segment
- Ratings and specifications are for one segment
- When both colors of a bi-color LED are driven simultaneously, the rating of NARG types are the total of the Pd, 1F and 1FM values.
- ❖1 : NARG 10□ type in dynamic drive has a duty cycle of 1/2 and f=500Hz and the others have a duty cycle of 1/5 and f=1 kHz.

SUPER BRIGHT LED NUMERIC DISPLAY

7.5mm Type




T_a = 25 °C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v					fig.
		Anode Common	Cathode Common		MIN.	Rank B TYP.	Rank C MIN.	Rank C TYP.	I _F	
7.0 X 11.0		NAR131S/ 133S	NKR131S/ 133S	Red	1.4	2.8	2.8	5.6	10	1
		NAR131SP/ 133SP	NKG131SP/ 133SP	Green	1	2	—	—	10	
		NAA131S/ 133S	NKA131S/ 133S	Orange	0.6	1.2	—	—	10	
10.0 X 15.0		NAR131ME/ 133ME	NKR131ME/ 133ME	Red	1.2	2.4	—	—	10	2
		NAG131MP/ 133MP	NKG131MP/ 133MP	Green	0.6	1.2	—	—	10	
		NAA131M/ 133M	NKA131M/ 133M	Orange	0.8	1.6	—	—	10	
10.0 X 19.0		NAR131/ 133	NKR131/ 133	Red	0.3	0.6	—	—	10	3
		NAG131P/ 133P	NKG131P/ 133P	Green	0.6	1.2	—	—	10	
		NAA131/ 133	NKA131/ 133	Orange	0.8	1.6	—	—	10	
mm		Units			mcd					mA

Package Dimensions

unit : mm

Tolerance : ±0.25mm

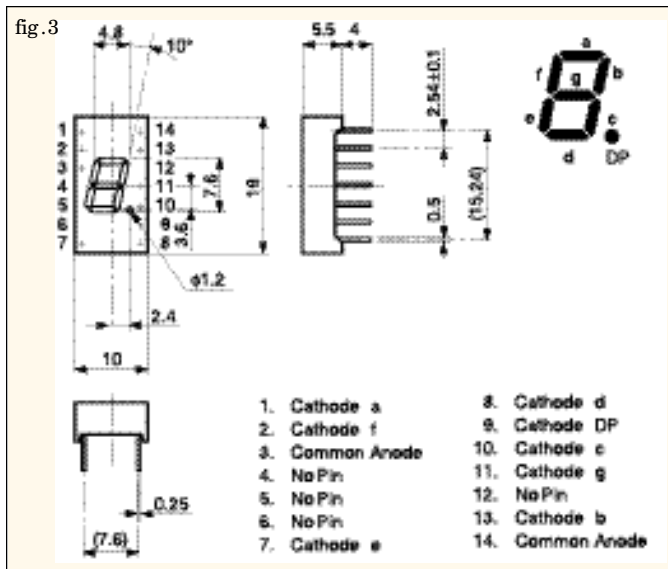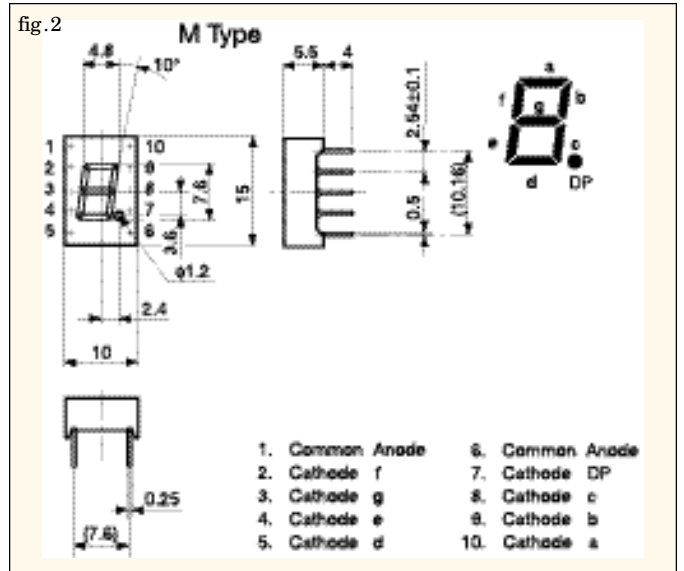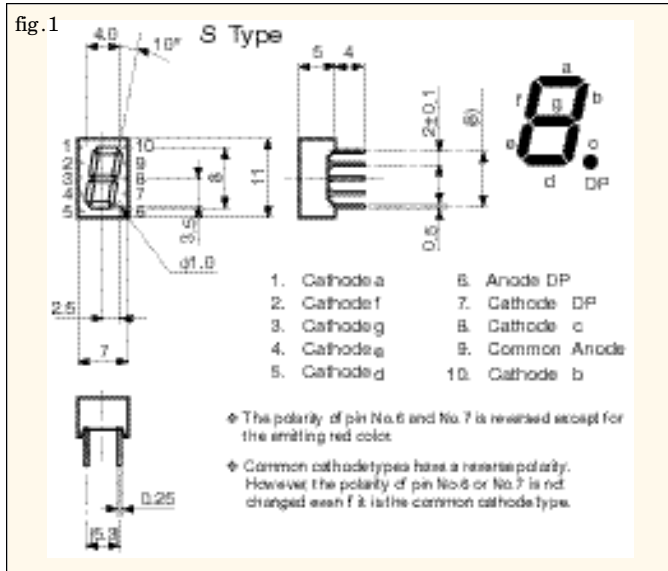

◆ Common cathode types shown in fig. 2 and 3 have a reverse polarity.

SUPER BRIGHT LED NUMERIC DISPLAY

10mm Type



T_a = 25 °C

Case Size (WXH)	Shape	Part No.	Emitted Color	Luminous Intensity I _v						fig.
				MIN.	Rank B	TYP.	MIN.	Rank C	TYP.	
12.5 X 19.0	Square shape type	NSR141/143	Red	4	8	8	11	20	4	
		NSG141P/143P	Green	1	2	—	—	20		
		NSA141/143	Orange	3	6	—	—	20		
12.5 X 19.0	Arrow feather type	NSR145/147	Red	3.2	6.4	6.4	8.8	20	5	
		NSG145P/147P	Green	0.8	1.6	—	—	20		
		NSA145/147	Orange	2.4	4.8	—	—	20		
mm		Units		mcd						mA

Package Dimensions

unit: mm

Tolerance : ±0.25mm

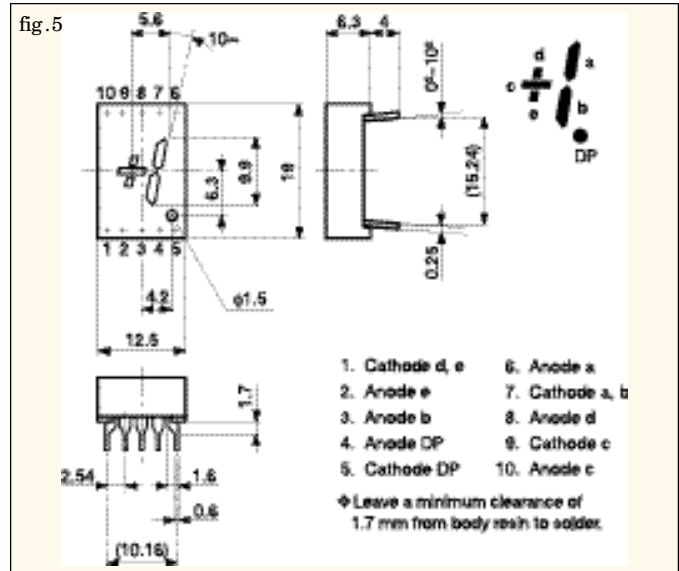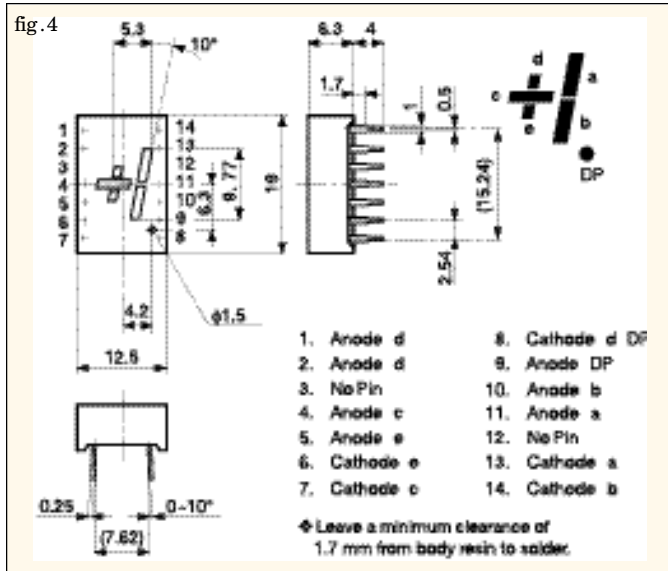

SUPER BRIGHT LED NUMERIC DISPLAY

10mm Type

T_a = 25 °C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v					fig.
		Anode Common	Cathode Common		MIN.	Rank B TYP.	Rank C MIN.	Rank C TYP.	I _f	
9.6 X 13.0	Arrow feather type 	NAR141S/ 143S	NKR141S/ 143S	Red	1.6	3.2	3.2	6.4	10	6
		NAR141SP/ 143SP	NKG141SP/ 143SP	Green	0.6	1.2	—	—	10	
		NAA141S/ 143S	NKA141S/ 143S	Orange	0.8	1.6	—	—	10	
12.5 X 19.0	Square shape type 	NAR141/ 143	NKR141/ 143	Red	4	8	8	11	20	7
		NAG141P/ 143P	NKG141P/ 143P	Green	1	2	—	—	20	
		NAA141/ 143	NKA141/ 143	Orange	3	6	—	—	20	
12.5 X 19.0	Arrow feather type 	NAR145/ 147	NKR145/ 147	Red	3.2	6.4	6.4	8.8	20	8
		NAG145P/ 147P	NKG145P/ 147P	Green	0.8	1.6	—	—	20	
		NAA145/ 147	NKA145/ 147	Orange	2.4	4.8	—	—	20	
mm		Units			mcd					mA

Package Dimensions

unit : mm

Tolerance : ±0.25 mm

fig.6

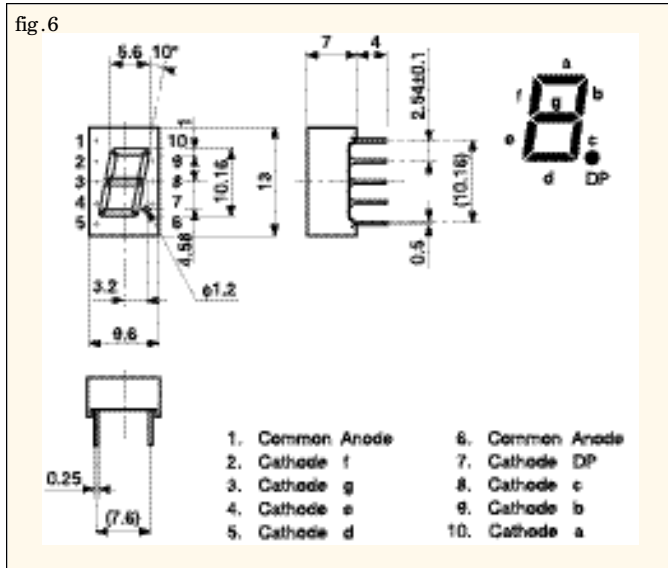


fig.7


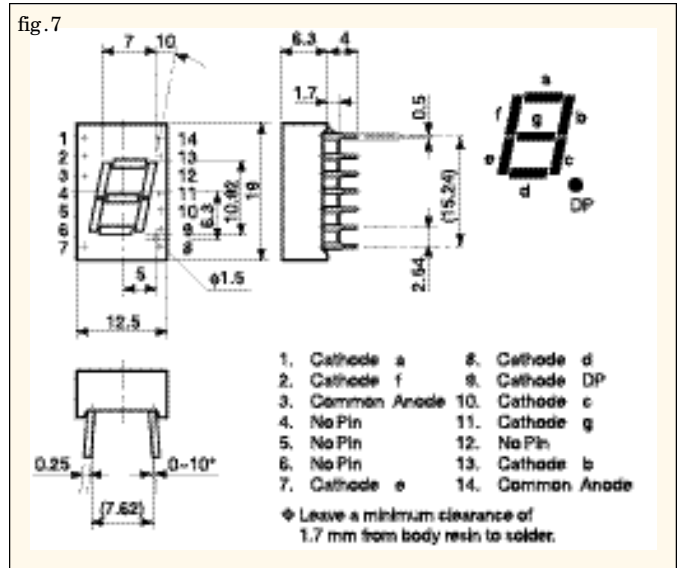


fig.8



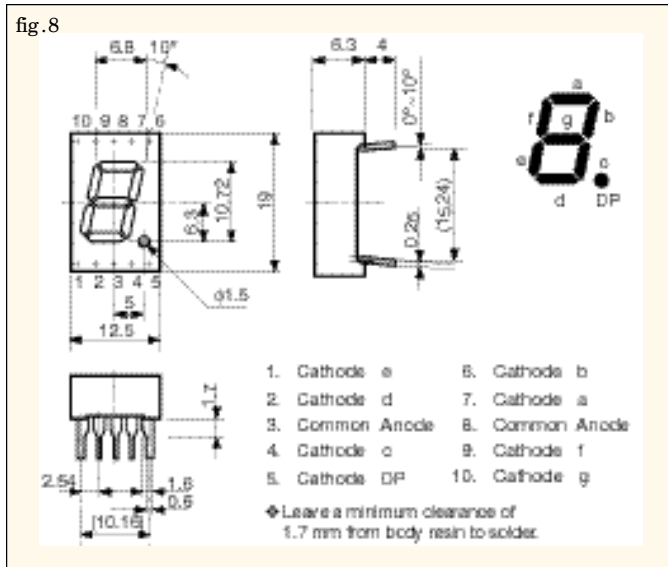

● Common cathode types shown in fig. 6, 7, and 8 have a reverse polarity.

SUPER BRIGHT LED NUMERIC DISPLAY

10mm Type



T_a = 25 °C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v					fig.	
		Anode Common	Cathode Common		Rank B		Rank C		I _F		
				MIN.		TYP.	MIN.		TYP.		
25.2 X 19.0	Square shape type 	NAR241/243	NKR241/243	Red	4	8	8	11	20	9	
		NAG241P/243P	NKG241P/243P	Green	1	2	—	—	20		
		NAA241/243	NKA241/243	Orange	3	6	—	—	20		
25.2 X 19.0	Arrow feather type 	NAR245/247	NKR245/247	Red	3.2	6.4	6.4	8.8	20	10	
		NAG245P/247P	NKG245P/247P	Green	0.8	1.6	—	—	20		
		NAA245/247	NKA245/247	Orange	2.4	4.8	—	—	20		
mm	Units		mcd					mA			

Package Dimensions

unit: mm

Tolerance : ±0.25mm

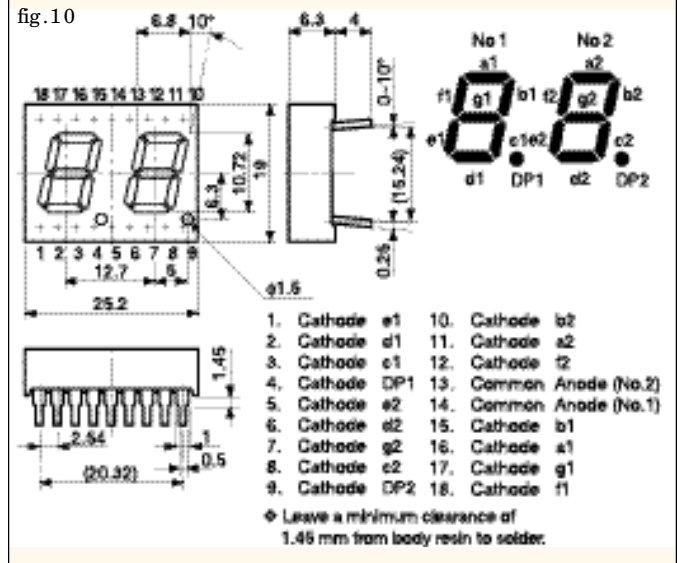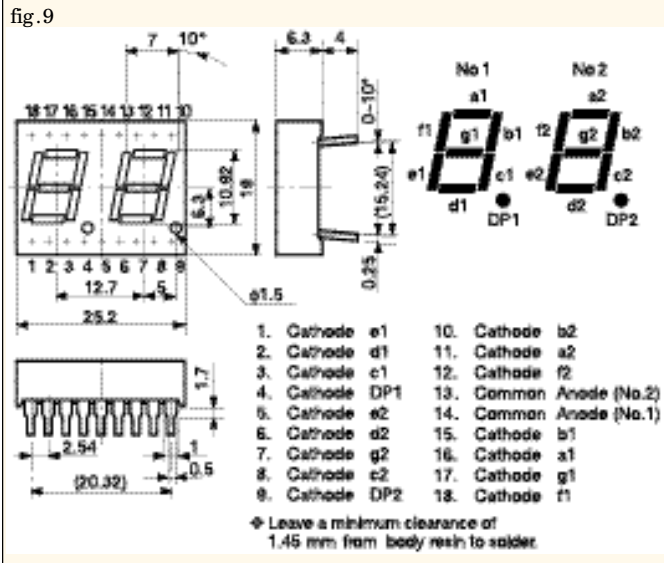

● Common cathode types shown in fig. 9 and 10 have a reverse polarity.

SUPER BRIGHT LED NUMERIC DISPLAY

15mm Type

T_a = 25 °C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v					fig.
		Anode Common	Cathode Common		MIN.	Rank B	TYP.	MIN.	Rank C	
12.5 X 19.0	Arrow feather type 	NSR161/163		Red	6	12	12	15	20	11
		NSG161P/163P		Green	2	4	—	—	20	
		NSA161/163		Orange	4	8	—	—	20	
12.5 X 19.0	Arrow feather type 	NAR161/163	NKR161/163	Red	6	12	12	15	20	12
		NAG161P/163P	NKG161P/163P	Green	2	4	—	—	20	
		NAA161/163	NKA161/163	Orange	4	8	—	—	20	
25.2 X 19.0	Arrow feather type 	NAR261/263	NKR261/263	Red	6	12	12	15	20	13
		NAG261P/263P	NKG261P/263P	Green	2	4	—	—	20	
		NAA261/263	NKA261/263	Orange	4	8	—	—	20	
mm		Units			mod					mA

Package Dimensions

unit : mm

Tolerance : ±0.25mm

fig.11

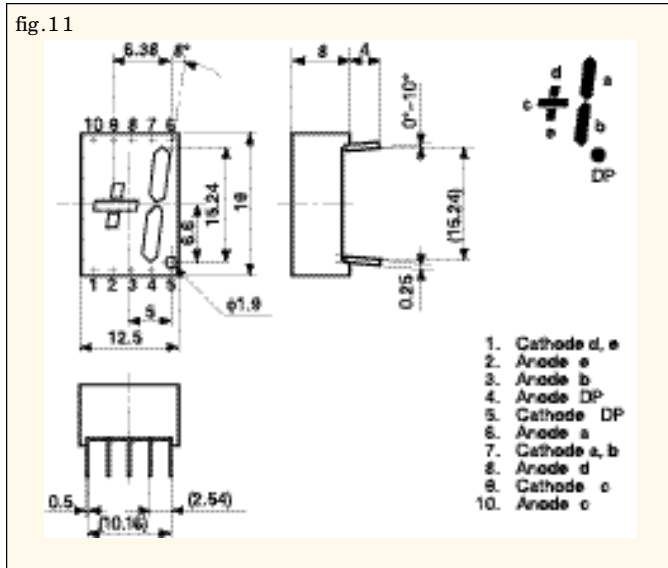


fig.12


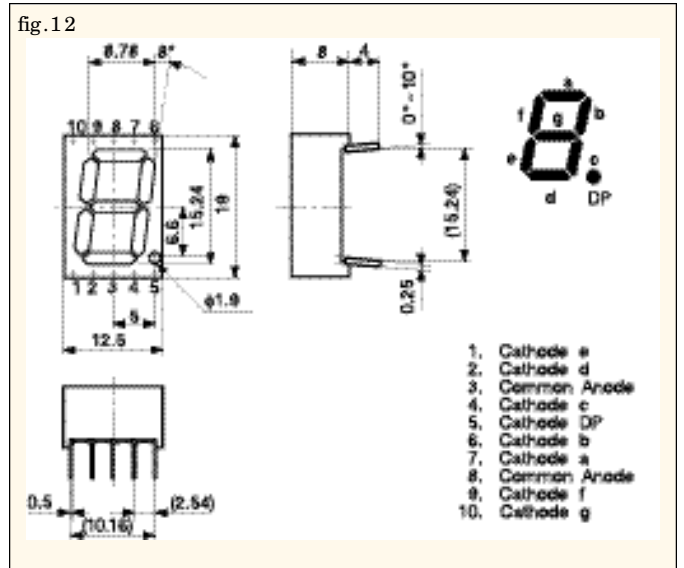


fig.13



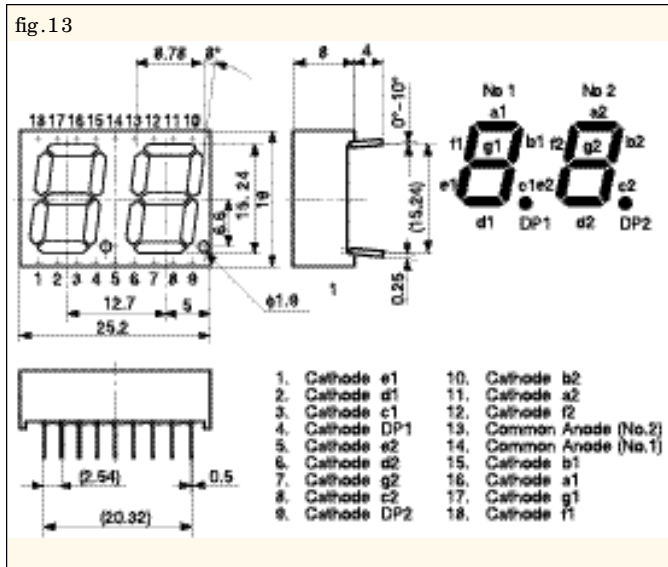


• Common cathode types shown in fig. 12 and 13 have a reverse polarity.

SUPER BRIGHT LED NUMERIC DISPLAY

25mm Type

T_a = 25 °C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v					fig.
		Anode Common	Cathode Common		Rank B		Rank C		I _F	
					MIN.	TYP.	MIN.	TYP.		
22.8 X 33.0	Square shape type 	NSR101/103		Red	10	20	20	25	20	14
		NSG101P/103P		Green	4	8	—	—	20	
		NSA101/103		Orange	8	16	—	—	20	
22.8 X 33.0	Square shape type 	NAR101/103	NKR101/103	Red	10	20	20	25	20	15
		NAG101P/103P	NKG101P/103P	Green	4	8	—	—	20	
		NAA101/103	NKA101/103	Orange	8	16	—	—	20	
22.8 X 33.0	Arrow feather type 	NAR105/107	NKR105/107	Red	10	20	20	25	20	16
		NAG105P/107P	NKG105P/107P	Green	4	8	—	—	20	
		NAA105/107	NKA105/107	Orange	8	16	—	—	20	
mm		Units			mcd					mA

Package Dimensions

unit: mm

Tolerance : ±0.25mm

fig.14

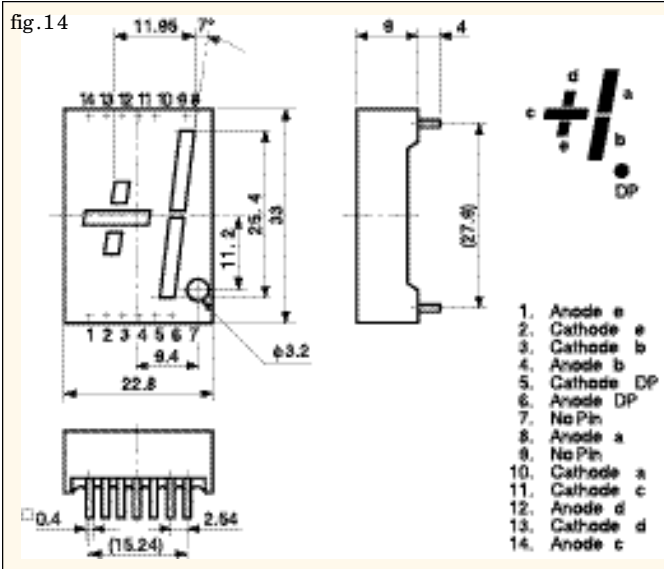


fig.15


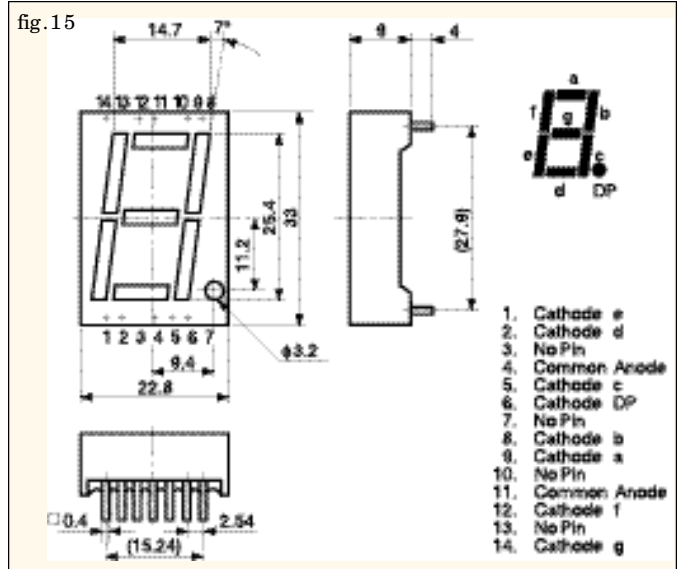


fig.16

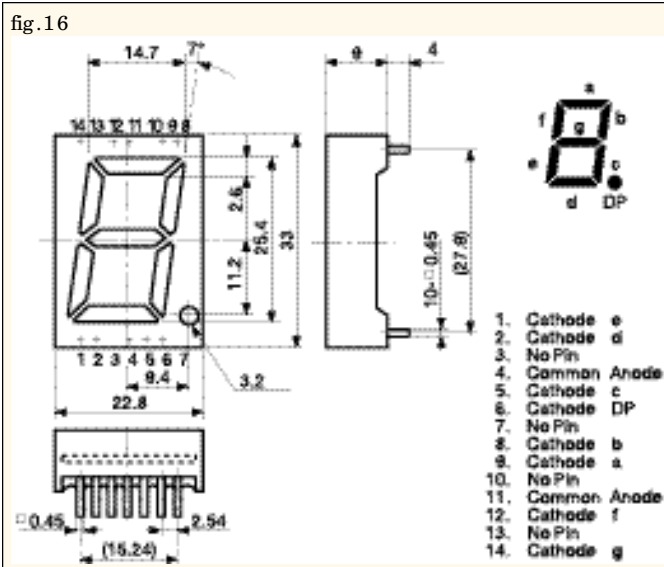

• Common cathode types shown in fig. 15 and 16 have a reverse polarity.

SUPER BRIGHT LED NUMERIC DISPLAY

Bi-color LED Numeric Displays 10/15/25mm TYPE

T_a = 25 °C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v			fig.
		Anode Common	Cathode Common		MIN.	TYP.	I _F	
10.0 X 19.0		NARG141/143	NKRG141/143	Red	1.2	2.4	10	17
				Green	1.2	2.4	10	
12.5 X 19.0		NARG161/163	NKRG161/163	Red	1.2	2.4	10	18
				Green	1.2	2.4	10	
22.8 X 33.0		NARG105/107		Red	2	4	10	19
				Green	2	4	10	
mm		Units			mcd		mA	

Package Dimensions

unit : mm

Tolerance : ±0.25mm

fig.17

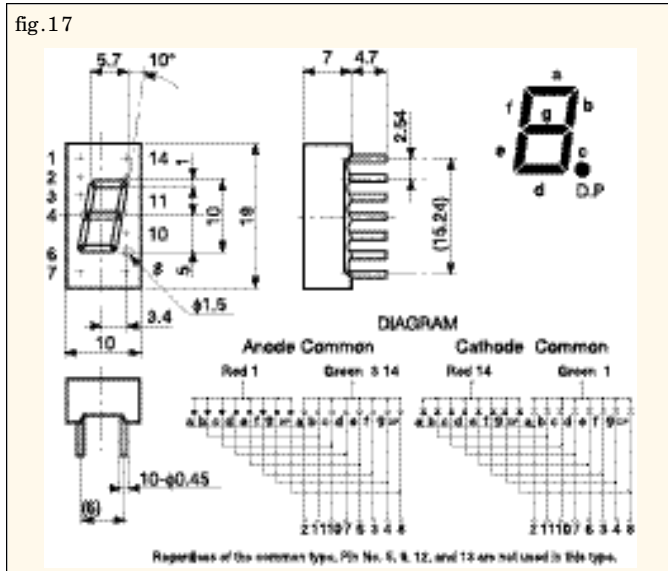


fig.18

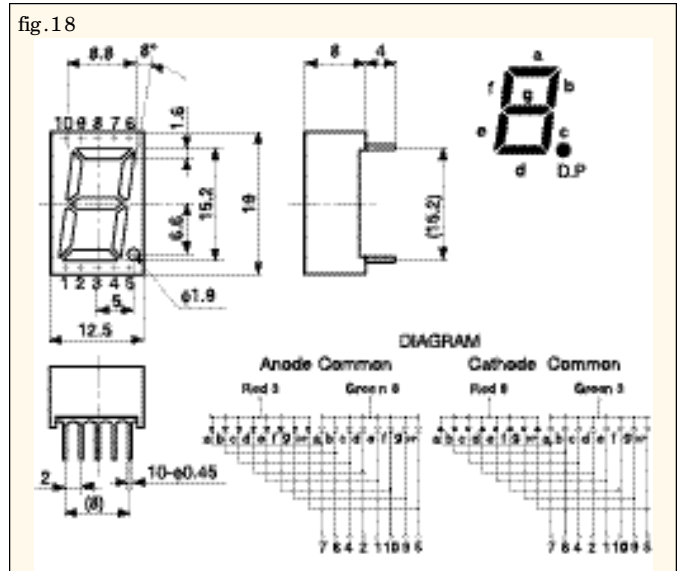


fig.19

