



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Surface Mount, NTC Thermistors



QUICK REFERENCE DATA

PARAMETER	VALUE
Resistance value at 25 °C	2 to 470 kOhm
Tolerance on R ₂₅ -value; note1	±5%; ±10%
Tolerance on B _{25/85} -value	see Electrical Data and Ordering Information
Maximum dissipation at 25 °C	210 mW
Thermal time constant τ	≈10 s
Operating temperature range	-55 to +150 °C
R/T values	see tables
Climatic category	40/125/56
Mass	≈0.0155 g

Note

1. Tighter tolerances are available upon request.

FEATURES

- High sensitivity
- High accuracy over a wide temperature range
- AgPd terminations
- Suitable for wave or reflow soldering

APPLICATIONS

- Temperature compensation, sensing and protection in, for example:
 - Battery chargers
 - Consumer equipment
 - Office equipment

DESCRIPTION

Size 0805 chip thermistors with a negative temperature coefficient. The device has no marking.

PACKAGING


Available in 8 mm punched paper tape on reel package of 4000 units.

SOLDERABILITY AND RESISTANCE TO SOLDERING HEAT

IEC 60068-2-20	TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
6	T _c	solderability	3 s at 215 °C; 2 s at 235 °C	$\Delta R/R < 5\%$
		resistance to soldering heat	10 s at 260 °C	$\Delta R/R < 5\%$

ELECTRICAL DATA AND ORDERING INFORMATION

R ₂₅ (Ω)	B _{25/85} -VALUE (K)	TOLERANCE ON B _{25/85} (%)	CATALOG NUMBER 2322 615 1....	
			±5% TOL. ON R ₂₅	±10% TOL. ON R ₂₅
2000	3680	±3	3202	2202
2200	3680	±3	3222	2222
4700	3560	±1	3472	2472
10000	3620	±1	3103	2103
15000	3528	±1	3153	2153
22000	3930	±1.5	3223	2223
33000	3960	±3	3333	2333
47000	4090	±1.5	3473	2473
68000	3740	±3	3683	2683
100000	3650	±1	3104	2104
330000	4015	±3	3334	2334
470000	4130	±3	3474	2474

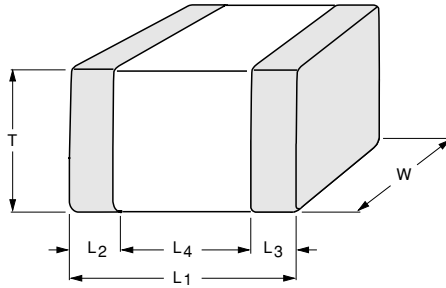DIMENSIONS in millimeters


L ₁	W	T MAX.	L ₂ and L ₃ MIN.	L ₄ MIN.
2.0 ±0.2	1.25 ±0.2	1.25	0.5 ±0.25	0.5

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R₂₅ AT 2000 Ω

T _{oper} (°C)	CATALOG NUMBER 2322 615 1.202						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	27.23	-6.21	54462.6	15.94	2.57	21.46	3.46
-35	20.06	-6.02	40118.4	14.88	2.47	20.35	3.38
-30	14.92	-5.83	29834.5	13.87	2.38	19.29	3.31
-25	11.20	-5.65	22393.8	12.89	2.28	18.27	3.24
-20	8.481	-5.47	16961.6	11.95	2.19	17.29	3.16
-15	6.480	-5.29	12960.5	11.05	2.09	16.34	3.09
-10	4.994	-5.13	9987.9	10.19	1.99	15.44	3.01
-5	3.880	-4.97	7760.8	9.36	1.89	14.57	2.93
0	3.393	-4.81	6078.6	8.56	1.78	13.73	2.86
5	2.399	-4.66	4797.7	7.79	1.67	12.93	2.78
10	1.908	-4.51	3815.0	7.05	1.56	12.15	2.69
15	1.528	-4.37	3055.3	6.34	1.45	11.41	2.61
20	1.232	-4.24	2463.8	5.66	1.34	10.69	2.52
25	1.000	-4.11	2000.0	5.00	1.22	10.00	2.44
30	0.8170	-3.98	1633.9	5.64	1.42	10.67	2.68
35	0.6715	-3.86	1343.1	6.26	1.62	11.32	2.93
40	0.5553	-3.74	1110.5	6.87	1.83	11.96	3.19
45	0.4618	-3.63	923.5	7.46	2.05	12.58	3.46
50	0.3861	-3.53	772.2	8.04	2.28	13.19	3.74
55	0.3245	-3.42	649.0	8.61	2.51	13.78	4.03
60	0.2742	-3.32	548.3	9.16	2.76	14.35	4.32
65	0.2327	-3.23	465.5	9.69	3.00	14.92	4.62
70	0.1985	-3.14	397.0	10.22	3.26	15.47	4.93
75	0.1701	-3.05	340.2	10.73	3.52	16.00	5.25
80	0.1464	-2.96	292.7	11.23	3.79	16.53	5.58
85	0.1265	-2.88	252.9	11.72	4.07	17.04	5.92
90	0.1097	-2.80	219.4	12.20	4.35	17.54	6.26
95	0.0956	-2.73	191.1	12.66	4.65	18.03	6.61
100	0.0835	-2.65	167.1	13.12	4.95	18.50	6.98
105	0.0733	-2.58	146.6	13.56	5.25	18.97	7.35
110	0.0645	-2.51	129.1	14.00	5.57	19.43	7.73
115	0.0570	-2.45	114.0	14.42	5.89	19.87	8.12
120	0.0505	-2.38	101.0	14.84	6.22	20.31	8.52
125	0.0449	-2.32	89.8	15.24	6.56	20.73	8.92
130	0.0400	-2.26	80.1	15.64	6.91	21.15	9.34
135	0.0358	-2.21	71.6	16.03	7.26	21.55	9.76
140	0.0321	-2.15	64.2	16.41	7.62	21.95	10.20
145	0.0289	-2.10	57.7	16.78	7.99	22.34	10.64
150	0.0260	-2.05	52.1	17.15	8.37	22.72	11.09

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R₂₅ AT 2200 Ω

T _{oper} (°C)	CATALOG NUMBER 2322 615 1.222						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	27.23	-6.21	59909	15.94	2.57	21.46	3.46
-35	20.06	-6.02	44130	14.88	2.47	20.35	3.38
-30	14.92	-5.83	12818	13.87	2.38	19.29	3.31
-25	11.20	-5.65	24633	12.89	2.28	18.27	3.24
-20	8.481	-5.47	18658	11.95	2.19	17.29	3.16
-15	6.480	-5.29	14257	11.05	2.09	16.34	3.09
-10	4.994	-5.13	10987	10.19	1.99	15.44	3.01
-5	3.880	-4.97	8537	9.36	1.89	14.57	2.93
0	3.393	-4.81	6686	8.56	1.78	13.73	2.86
5	2.399	-4.66	5278	7.79	1.67	12.93	2.78
10	1.908	-4.51	4196	7.05	1.56	12.15	2.69
15	1.528	-4.37	3361	6.34	1.45	11.41	2.61
20	1.232	-4.24	2710	5.66	1.34	10.69	2.52
25	1.000	-4.11	2200	5.00	1.22	10.00	2.44
30	0.8170	-3.98	1797	5.64	1.42	10.67	2.68
35	0.6715	-3.86	1477	6.26	1.62	11.32	2.93
40	0.5553	-3.74	1222	6.87	1.83	11.96	3.19
45	0.4618	-3.63	1016	7.46	2.05	12.58	3.46
50	0.3861	-3.53	849.4	8.04	2.28	13.19	3.74
55	0.3245	-3.42	714.0	8.61	2.51	13.78	4.03
60	0.2742	-3.32	603.2	9.16	2.76	14.35	4.32
65	0.2327	-3.23	512.0	9.69	3.00	14.92	4.62
70	0.1985	-3.14	436.7	10.22	3.26	15.47	4.93
75	0.1701	-3.05	374.2	10.73	3.52	16.00	5.25
80	0.1464	-2.96	322.0	11.23	3.79	16.53	5.58
85	0.1265	-2.88	278.2	11.72	4.07	17.04	5.92
90	0.1097	-2.80	241.4	12.20	4.35	17.54	6.26
95	0.0956	-2.73	210.2	12.66	4.65	18.03	6.61
100	0.0835	-2.65	183.8	13.12	4.95	18.50	6.98
105	0.0733	-2.58	161.3	13.56	5.25	18.97	7.35
110	0.0645	-2.51	142.0	14.00	5.57	19.43	7.73
115	0.0570	-2.45	125.4	14.42	5.89	19.87	8.12
120	0.0505	-2.38	111.2	14.84	6.22	20.31	8.52
125	0.0449	-2.32	98.81	15.24	6.56	20.73	8.92
130	0.0400	-2.26	88.10	15.64	6.91	21.15	9.34
135	0.0358	-2.21	78.78	16.03	7.26	21.55	9.76
140	0.0321	-2.15	70.65	16.41	7.62	21.95	10.20
145	0.0289	-2.10	63.52	16.78	7.99	22.34	10.64
150	0.0260	-2.05	57.26	17.15	8.37	22.72	11.09

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R₂₅ AT 4700 Ω

T _{oper} (°C)	CATALOG NUMBER 2322 615 1.472						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	21.9261	-5.75	103053	8.50	1.48	13.66	2.38
-35	16.5224	-5.57	77655	8.16	1.46	13.31	2.39
-30	12.5583	-5.40	59024	7.84	1.45	12.97	2.40
-25	9.62492	-5.24	45237	7.53	1.44	12.65	2.41
-20	7.43618	-5.08	34950	7.23	1.42	12.33	2.43
-15	5.78976	-4.93	27212	6.94	1.41	12.04	2.44
-10	4.54158	-4.78	21345	6.67	1.39	11.75	2.46
-5	3.58813	-4.64	16864	6.40	1.38	11.47	2.47
0	2.85449	-4.51	13416	6.15	1.36	11.20	2.49
5	2.28599	-4.38	10744	5.90	1.35	10.94	2.50



T _{oper} (°C)	CATALOG NUMBER 2322 615 1.472						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
10	1.84245	-4.25	8659.5	5.66	1.33	10.70	2.52
15	1.49414	-4.13	7022.5	5.44	1.32	10.46	2.53
20	1.21887	-4.01	5728.7	5.21	1.30	10.22	2.55
25	1.00	-3.90	4700.0	5.00	1.28	10.00	2.56
30	0.82494	-3.80	3877.2	5.21	1.37	10.22	2.69
35	0.68413	-3.69	3215.4	5.41	1.46	10.43	2.82
40	0.57025	-3.59	2680.2	5.60	1.56	10.63	2.96
45	0.47765	-3.50	2245.0	5.79	1.66	10.83	3.10
50	0.40198	-3.40	1889.3	5.97	1.75	11.02	3.24
55	0.33984	-3.31	1597.2	6.15	1.85	11.20	3.38
60	0.28856	-3.23	1356.2	6.32	1.96	11.38	3.52
65	0.24606	-3.15	1156.5	6.48	2.06	11.55	3.67
70	0.21067	-3.07	990.1	6.64	2.17	11.72	3.82
75	0.18108	-2.99	851.06	6.80	2.28	11.89	3.98
80	0.15623	-2.91	734.29	6.95	2.39	12.05	4.13
85	0.13529	-2.84	635.86	7.10	2.50	12.20	4.29
90	0.11757	-2.77	552.56	7.24	2.61	12.35	4.45
95	0.10251	-2.71	481.81	7.38	2.73	12.50	4.62
100	0.08968	-2.64	421.50	7.52	2.85	12.64	4.78
105	0.07871	-2.58	369.91	7.65	2.97	12.78	4.95
110	0.06928	-2.52	325.64	7.78	3.09	12.91	5.12
115	0.06117	-2.46	287.51	7.91	3.21	13.05	5.30
120	0.05416	-2.41	254.57	8.03	3.34	13.17	5.48
125	0.04809	-2.35	226.03	8.15	3.47	13.30	5.66
130	0.04282	-2.30	201.23	8.27	3.60	13.42	5.84
135	0.03822	-2.25	179.62	8.38	3.73	13.54	6.03
140	0.0342	-2.20	160.73	8.49	3.86	13.66	6.21
145	0.03068	-2.15	144.17	8.60	4.00	13.77	6.40
150	0.02758	-2.10	129.63	8.70	4.14	13.88	6.60

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R ₂₅ AT 10000 Ω							
T _{oper} (°C)	CATALOG NUMBER 2322 615 1.103						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	23.0973	-5.84	230973	8.50	1.45	13.72	2.34
-35	17.3222	-5.67	173222	8.16	1.44	13.36	2.35
-30	13.1054	-5.49	131054	7.84	1.43	13.02	2.36
-25	9.99934	-5.33	99993	7.53	1.41	12.69	2.38
-20	7.69193	-5.17	76919	7.23	1.40	12.37	2.39
-15	5.96369	-5.01	59637	6.94	1.38	12.07	2.40
-10	4.6589	-4.86	46589	6.67	1.37	11.78	2.42
-5	3.66623	-4.72	36662	6.40	1.36	11.49	2.43
0	2.9054	-4.58	29054	6.15	1.34	11.22	2.44
5	2.31806	-4.45	23181	5.90	1.33	10.96	2.46
10	1.86153	-4.32	18615.3	5.66	1.31	10.71	2.47
15	1.50429	-4.20	15042.9	5.44	1.29	10.46	2.49
20	1.22295	-4.08	12229.5	5.21	1.28	10.23	2.50
25	1.00	-3.97	10000.0	5.00	1.26	10.00	2.52
30	0.82227	-3.86	8222.7	5.21	1.35	10.22	2.65
35	0.67977	-3.75	6797.7	5.41	1.44	10.43	2.78
40	0.56487	-3.65	5648.7	5.60	1.53	10.64	2.91
45	0.47174	-3.55	4717.4	5.79	1.63	10.84	3.05
50	0.39585	-3.46	3958.5	5.97	1.72	11.03	3.19
55	0.33371	-3.37	3337.1	6.15	1.82	11.22	3.33

T_{oper} (°C)	CATALOG NUMBER 2322 615 1.103						
	R_T/R_{25}	TC (%/K)	R_T (Ω)	5%TOL. $\Delta R/R$ (%)	5%TOL. ΔT (K)	10%TOL. $\Delta R/R$ (%)	10%TOL. ΔT (K)
60	0.28258	-3.28	2825.8	6.32	1.92	11.40	3.47
65	0.24031	-3.20	2403.1	6.48	2.03	11.58	3.62
70	0.20521	-3.12	2052.1	6.64	2.13	11.75	3.77
75	0.17594	-3.04	1759.37	6.80	2.24	11.92	3.92
80	0.15142	-2.96	1514.20	6.95	2.35	12.08	4.08
85	0.1308	-2.89	1308.04	7.10	2.46	12.24	4.24
90	0.1134	-2.82	1134.00	7.24	2.57	12.39	4.40
95	0.09865	-2.75	986.53	7.38	2.68	12.54	4.56
100	0.08611	-2.69	861.10	7.52	2.80	12.68	4.72
105	0.0754	-2.62	754.04	7.65	2.92	12.83	4.89
110	0.06624	-2.56	662.36	7.78	3.04	12.96	5.06
115	0.05836	-2.50	583.58	7.91	3.16	13.10	5.24
120	0.05157	-2.45	515.67	8.03	3.28	13.23	5.41
125	0.4569	-2.39	456.94	8.15	3.41	13.35	5.59
130	0.0406	-2.34	406.01	8.27	3.54	13.48	5.77
135	0.03617	-2.29	361.71	8.38	3.67	13.60	5.96
140	0.03231	-2.23	323.06	8.49	3.80	13.72	6.15
145	0.02893	-2.19	289.26	8.60	3.93	13.83	6.34
150	0.02596	-2.14	259.61	8.70	4.07	13.95	6.53

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT 15000 Ω

T_{oper} (°C)	CATALOG NUMBER 2322 615 1.153						
	R_T/R_{25}	TC (%/K)	R_T (Ω)	5%TOL. $\Delta R/R$ (%)	5%TOL. ΔT (K)	10%TOL. $\Delta R/R$ (%)	10%TOL. ΔT (K)
-40	23.3421	-6.06	350131	8.46	1.40	13.63	2.25
-35	17.336	-5.84	260040	8.13	1.39	13.28	2.27
-30	13.0176	-5.62	195263	7.81	1.39	12.94	2.30
-25	9.87717	-5.42	148158	7.50	1.38	12.62	2.33
-20	7.56881	-5.23	113532	7.21	1.38	12.31	2.36
-15	5.8546	-5.05	87819	6.93	1.37	12.02	2.38
-10	4.56918	-4.87	68538	6.65	1.37	11.73	2.41
-5	3.59635	-4.71	53945	6.39	1.36	11.46	2.43
0	2.85356	-4.55	42803	6.14	1.35	11.19	2.46
5	2.28163	-4.40	34224	5.89	1.34	10.94	2.49
10	1.83772	-4.26	27566	5.66	1.33	10.69	2.51
15	1.49054	-4.12	22358	5.43	1.32	10.45	2.54
20	1.21701	-3.99	18255	5.21	1.31	10.22	2.56
25	1.00	-3.87	15000	5.00	1.29	10.00	2.59
30	0.83154	-3.75	12473	5.20	1.39	10.21	2.73
35	0.69408	-3.63	10411	5.40	1.49	10.42	2.87
40	0.58149	-3.53	8722.3	5.60	1.59	10.62	3.01
45	0.48893	-3.42	7334.0	5.78	1.69	10.82	3.16
50	0.41256	-3.32	6188.5	5.96	1.79	11.01	3.31
55	0.34933	-3.23	5240.0	6.14	1.90	11.19	3.47
60	0.2968	-3.14	4451.9	6.31	2.01	11.37	3.62
65	0.253	-3.05	3794.9	6.47	2.12	11.54	3.78
70	0.21635	-2.97	3245.3	6.63	2.24	11.71	3.95
75	0.1856	-2.89	2784.0	6.78	2.35	11.87	4.11
80	0.15971	-2.81	2395.7	6.94	2.47	12.03	4.28
85	0.13785	-2.73	2067.7	7.08	2.59	12.18	4.46
90	0.11932	-2.66	1789.8	7.22	2.71	12.33	4.63
95	0.10358	-2.59	1553.7	7.36	2.84	12.47	4.81
100	0.09016	-2.53	1352.4	7.50	2.97	12.62	4.99
105	0.0787	-2.46	1180.5	7.63	3.10	12.75	5.18
110	0.06887	-2.40	1033.1	7.76	3.23	12.89	5.36



T _{oper} (°C)	CATALOG NUMBER 2322 615 1.153						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
115	0.06043	-2.34	906.41	7.88	3.36	13.02	5.56
120	0.05315	-2.29	797.27	8.00	3.50	13.15	5.75
125	0.04687	-2.23	702.99	8.12	3.64	13.27	5.95
130	0.04142	-2.18	621.33	8.24	3.78	13.39	6.15
135	0.03669	-2.13	550.42	8.35	3.92	13.51	6.35
140	0.03258	-2.08	488.72	8.46	4.07	13.62	6.56
145	0.02899	-2.03	434.88	8.57	4.22	13.74	6.77
150	0.02585	-1.98	387.81	8.67	4.37	13.85	6.98

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R ₂₅ AT 22000 Ω							
T _{oper} (°C)	CATALOG NUMBER 2322 615 1.223						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	30.7958	-6.42	677507.99	16.71	2.60	22.27	3.47
-35	22.4562	-6.21	494036.94	15.59	2.51	21.09	3.39
-30	16.5404	-6.02	363888.31	14.50	2.41	19.96	3.32
-25	12.3010	-5.83	270622.69	13.47	2.31	18.87	3.24
-20	9.2333	-5.65	203131.71	12.47	2.21	17.82	3.16
-15	6.9923	-5.47	153831.44	11.51	2.10	16.82	3.07
-10	5.3406	-5.31	117492.27	10.59	2.00	15.85	2.99
-5	4.1124	-5.15	90473.18	9.70	1.88	14.92	2.90
0	3.1916	-4.99	70215.46	8.85	1.77	14.03	2.81
5	2.4957	-4.85	54904.79	8.02	1.66	13.17	2.72
10	1.9656	-4.70	43243.49	7.23	1.54	12.33	2.62
15	1.5589	-4.57	34295.62	6.46	1.41	11.53	2.52
20	1.2446	-4.44	27380.67	5.72	1.29	10.75	2.42
25	1.0000	-4.31	22000.00	5.00	1.16	10.00	2.32
30	0.8084	-4.19	17785.47	5.69	1.36	10.73	2.56
35	0.6574	-4.08	14463.33	6.36	1.56	11.43	2.80
40	0.5377	-3.97	11828.57	7.01	1.77	12.11	3.05
45	0.4421	-3.86	9726.63	7.64	1.98	12.77	3.31
50	0.3655	-3.76	8040.24	8.25	2.20	13.41	3.57
55	0.3036	-3.66	6679.83	8.84	2.42	14.02	3.83
60	0.2535	-3.56	5576.61	9.41	2.64	14.62	4.10
65	0.2126	-3.47	4677.41	9.97	2.87	15.21	4.38
70	0.1791	-3.38	3940.90	10.51	3.11	15.77	4.66
75	0.1516	-3.30	3334.80	11.03	3.35	16.32	4.95
80	0.1288	-3.22	2833.74	11.54	3.59	16.86	5.24
85	0.1099	-3.14	2417.69	12.04	3.84	17.37	5.54
90	0.0941	-3.06	2070.77	12.52	4.09	17.88	5.84
95	0.0809	-2.99	1780.29	12.99	4.35	18.37	6.15
100	0.0698	-2.92	1536.11	13.45	4.61	18.85	6.47
105	0.0605	-2.85	1330.07	13.89	4.88	19.31	6.79
110	0.0525	-2.78	1155.56	14.32	5.15	19.77	7.11
115	0.0458	-2.72	1007.23	14.74	5.43	20.21	7.44
120	0.0400	-2.65	880.71	15.15	5.71	20.64	7.78
125	0.0351	-2.59	772.44	15.55	6.00	21.06	8.12
130	0.0309	-2.54	679.48	15.94	6.29	21.46	8.46
135	0.0272	-2.48	599.41	16.32	6.58	21.86	8.82
140	0.0241	-2.43	530.24	16.70	6.88	22.25	9.18
145	0.0214	-2.37	470.31	17.06	7.19	22.63	9.54
150	0.0190	-2.32	418.23	17.41	7.50	23.00	9.91

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R₂₅ AT 33000 Ω

T _{oper} (°C)	CATALOG NUMBER 2322 615 1.333						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	32.68563	-6.59	1078626	16.66	2.53	22.22	3.37
-35	23.6478	-6.36	780377	15.54	2.44	21.04	3.31
-30	17.29545	-6.15	570750	14.46	2.35	19.91	3.24
-25	12.78101	-5.95	421773	13.43	2.26	18.83	3.17
-20	9.538645	-5.76	314775	12.44	2.16	17.79	3.09
-15	7.186265	-5.57	237147	11.48	2.06	16.79	3.01
-10	5.463007	-5.40	180279	10.56	1.96	15.83	2.93
-5	4.18889	-5.23	138233	9.68	1.85	14.90	2.85
0	3.238476	-5.07	106870	8.83	1.74	14.01	2.77
5	2.523488	-4.91	83275	8.01	1.63	13.15	2.68
10	1.9812223	-4.77	65380.4	7.22	1.51	12.32	2.59
15	1.566743	-4.62	51702.5	6.45	1.40	11.52	2.49
20	1.247561	-4.49	41169.5	5.71	1.27	10.75	2.39
25	1.00	-4.36	33000.0	5.00	1.15	10.00	2.29
30	0.806666	-4.24	26620.0	5.69	1.34	10.72	2.53
35	0.654682	-4.12	21604.5	6.36	1.54	11.42	2.78
40	0.534445	-4.00	17636.7	7.00	1.75	12.10	3.02
45	0.438742	-3.89	14478.5	7.63	1.96	12.76	3.28
50	0.362121	-3.79	11950.0	8.24	2.18	13.39	3.54
55	0.30043	-3.68	9914.2	8.82	2.39	14.01	3.80
60	0.250491	-3.59	8266.2	9.40	2.62	14.60	4.07
65	0.209854	-3.49	6925.2	9.95	2.85	15.18	4.35
70	0.17662	-3.40	5828.5	10.49	3.08	15.75	4.63
75	0.149308	-3.32	4927.18	11.01	3.32	16.29	4.91
80	0.126759	-3.23	4183.06	11.52	3.56	16.83	5.20
85	0.108058	-3.15	3565.93	12.01	3.81	17.34	5.50
90	0.092482	-3.07	3051.89	12.49	4.06	17.85	5.80
95	0.079453	-3.00	2621.93	12.96	4.32	18.33	6.11
100	0.068511	-2.93	2260.85	13.41	4.58	18.81	6.43
105	0.059286	-2.86	1956.42	13.85	4.85	19.27	6.74
110	0.051479	-2.79	1698.80	14.28	5.12	19.72	7.07
115	0.044848	-2.73	1479.98	14.70	5.39	20.16	7.40
120	0.039196	-2.66	1293.47	15.11	5.67	20.59	7.73
125	0.034363	-2.60	1133.96	15.51	5.96	21.01	8.07
130	0.030215	-2.54	997.09	15.90	6.25	21.42	8.42
135	0.026645	-2.49	879.28	16.28	6.55	21.81	8.77
140	0.023562	-2.43	777.55	16.65	6.84	22.20	9.13
145	0.020892	-2.38	689.45	17.01	7.15	22.58	9.49
150	0.018573	-2.33	612.93	17.36	7.46	22.95	9.86

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R₂₅ AT 47000 Ω

T _{oper} (°C)	CATALOG NUMBER 2322 615 1.473						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	37.156	-6.82	1746331	11.02	1.62	16.31	2.39
-35	26.5657	-6.60	1248589	10.44	1.58	15.70	2.38
-30	19.2065	-6.38	902705	9.89	1.55	15.12	2.37
-25	14.0347	-6.17	659632	9.35	1.52	14.56	2.36
-20	10.3608	-5.97	486956	8.84	1.48	14.02	2.35
-15	7.72365	-5.78	363012	8.35	1.44	13.51	2.34
-10	5.81188	-5.60	273158	7.87	1.41	13.01	2.32
-5	4.41266	-5.42	207395	7.42	1.37	12.53	2.31
0	3.37917	-5.25	158821	6.98	1.33	12.07	2.30



T _{oper} (°C)	CATALOG NUMBER 2322 615 1.473						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
5	2.60609	-5.09	122627	6.55	1.29	11.63	2.28
10	2.03042	-4.94	95430	6.14	1.24	11.20	2.27
15	1.59206	-4.79	74827	5.75	1.20	10.79	2.25
20	1.2574	-4.65	59098	5.37	1.15	10.39	2.23
25	1.00	-4.51	47000	5.00	1.11	10.00	2.22
30	0.8006	-4.38	37628	5.36	1.22	10.37	2.37
35	0.64506	-4.26	30318	5.70	1.34	10.73	2.52
40	0.52294	-4.14	24578	6.04	1.46	11.08	2.68
45	0.42644	-4.02	20043	6.36	1.58	11.42	2.84
50	0.34971	-3.91	16437	6.67	1.71	11.75	3.00
55	0.28836	-3.81	13553	6.98	1.83	12.07	3.17
60	0.23901	-3.70	11233	7.27	1.96	12.38	3.34
65	0.1991	-3.60	9358	7.56	2.10	12.68	3.52
70	0.16666	-3.51	7833	7.83	2.23	12.97	3.69
75	0.14016	-3.42	6587	8.10	2.37	13.25	3.88
80	0.1184	-3.33	5565	8.37	2.51	13.53	4.06
85	0.10045	-3.25	4721	8.62	2.66	13.79	4.25
90	0.08557	-3.16	4022	8.87	2.80	14.05	4.44
95	0.07319	-3.09	3440	9.11	2.95	14.30	4.64
100	0.06285	-3.01	2954	9.34	3.10	14.55	4.83
105	0.05416	-2.94	2546	9.57	3.26	14.79	5.04
110	0.04685	-2.87	2202	9.79	3.42	15.02	5.24
115	0.04066	-2.80	1911	10.01	3.58	15.25	5.45
120	0.03541	-2.73	1664	10.22	3.74	15.47	5.66
125	0.03094	-2.67	1454	10.43	3.91	15.69	5.88
130	0.02711	-2.61	1274	10.63	4.08	15.90	6.10
135	0.02383	-2.55	1120	10.82	4.25	16.10	6.32
140	0.02101	-2.49	987.6	11.02	4.42	16.30	6.54
145	0.01858	-2.44	873.2	11.20	4.60	16.50	6.77
150	0.01647	-2.38	774.1	11.38	4.78	16.69	7.01

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R₂₅ AT 68000 Ω

T _{oper} (°C)	CATALOG NUMBER 2322 615 1.683						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	25.783	-6.07	1753245	16.02	2.64	21.54	3.55
-35	19.1253	-5.88	1300524	14.96	2.54	20.43	3.47
-30	14.32	-5.70	973759.8	13.94	2.45	19.36	3.40
-25	10.8187	-5.52	735674.7	12.96	2.35	18.34	3.32
-20	8.24438	-5.35	560618	12.02	2.25	17.36	3.24
-15	6.33489	-5.19	430772.3	11.12	2.14	16.41	3.16
-10	4.90655	-5.03	333645.6	10.26	2.04	15.51	3.08
-5	3.82943	-4.88	260401.1	9.42	1.93	14.63	3.00
0	3.01078	-4.74	204733.3	8.62	1.82	13.79	2.91
5	2.3839	-4.60	162105	7.84	1.70	12.98	2.82
10	1.90036	-4.47	129224.7	7.09	1.59	12.19	2.73
15	1.52479	-4.34	103686	6.37	1.47	11.44	2.63
20	1.23112	-4.22	83716.26	5.67	1.35	10.71	2.54
25	1.00	-4.10	68000	5.00	1.22	10.00	2.44
30	0.81697	-3.99	55554.14	5.65	1.42	10.68	2.68
35	0.67116	-3.88	45638.98	6.28	1.62	11.34	2.93
40	0.55433	-3.77	37694.27	6.89	1.83	11.98	3.18
45	0.46019	-3.67	31292.96	7.48	2.04	12.60	3.43
50	0.38393	-3.58	26107.56	8.06	2.25	13.20	3.69
55	0.32184	-3.48	21885.36	8.61	2.47	13.78	3.96

T _{oper} (°C)	CATALOG NUMBER 2322 615 1.683						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
60	0.27103	-3.39	18430.3	9.15	2.70	14.35	4.23
65	0.22926	-3.30	15589.41	9.67	2.93	14.90	4.51
70	0.19475	-3.22	13242.67	10.18	3.16	15.43	4.79
75	0.16611	-3.14	11295.44	10.67	3.40	15.95	5.08
80	0.14225	-3.06	9672.73	11.15	3.64	16.45	5.37
85	0.12228	-2.99	8314.81	11.62	3.89	16.93	5.67
90	0.1055	-2.92	7173.88	12.07	4.14	17.41	5.97
95	0.09135	-2.85	6211.55	12.51	4.40	17.87	6.28
100	0.07936	-2.78	5396.80	12.94	4.66	18.32	6.59
105	0.06918	-2.71	4704.48	13.36	4.92	18.76	6.91
110	0.0605	-2.65	4114.12	13.77	5.19	19.18	7.24
115	0.05307	-2.59	3609	14.16	5.47	19.60	7.57
120	0.0467	-2.53	3175.38	14.55	5.75	20.00	7.90
125	0.04121	-2.47	2801.96	14.92	6.03	20.40	8.24
130	0.03646	-2.42	2479.38	15.29	6.32	20.78	8.59
135	0.03235	-2.37	2199.88	15.65	6.62	21.16	8.94
140	0.02878	-2.31	1957.02	16.00	6.91	21.52	9.30
145	0.02567	-2.26	1745.39	16.34	7.22	21.88	9.66
150	0.02295	-2.22	1560.48	16.67	7.52	22.23	10.03

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R₂₅ AT 100000 Ω

T _{oper} (°C)	CATALOG NUMBER 2322 615 1.104						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	23.8997	-5.92	2389969	8.58	1.45	13.72	2.32
-35	17.8586	-5.74	1785861	8.24	1.44	13.36	2.33
-30	13.465	-5.56	1346502	7.91	1.42	13.02	2.34
-25	10.2407	-5.39	1024071	7.59	1.41	12.69	2.35
-20	7.85378	-5.23	785378.1	7.28	1.39	12.37	2.37
-15	6.07181	-5.07	607181.2	6.99	1.38	12.07	2.38
-10	4.73061	-4.92	473061.1	6.71	1.36	11.78	2.40
-5	3.7132	-4.77	371319.7	6.44	1.35	11.49	2.41
0	2.93554	-4.63	293553.6	6.18	1.33	11.22	2.42
5	2.33677	-4.50	233677.1	5.92	1.32	10.96	2.44
10	1.87249	-4.37	187249.2	5.68	1.30	10.71	2.45
15	1.51004	-4.24	151003.9	5.45	1.28	10.46	2.47
20	1.22522	-4.12	122522.4	5.22	1.27	10.23	2.48
25	1.00	-4.01	100000	5.00	1.25	10.00	2.50
30	0.82081	-3.89	82081.36	5.21	1.34	10.22	2.62
35	0.67742	-3.79	67741.67	5.42	1.43	10.43	2.76
40	0.56201	-3.68	56201.1	5.62	1.52	10.64	2.89
45	0.46863	-3.59	46862.56	5.81	1.62	10.84	3.02
50	0.39266	-3.49	39266.09	5.99	1.72	11.03	3.16
55	0.33055	-3.40	33055.34	6.18	1.82	11.22	3.30
60	0.27953	-3.31	27952.66	6.35	1.92	11.40	3.45
65	0.23741	-3.22	23740.56	6.52	2.02	11.58	3.59
70	0.20248	-3.14	20247.74	6.69	2.13	11.75	3.74
75	0.17339	-3.06	17338.63	6.85	2.24	11.92	3.89
80	0.14905	-2.99	14905.37	7.00	2.34	12.08	4.05
85	0.12862	-2.91	12861.77	7.15	2.46	12.24	4.20
90	0.11139	-2.84	11138.64	7.30	2.57	12.39	4.36
95	0.0968	-2.77	9680.13	7.44	2.68	12.54	4.52
100	0.08441	-2.71	8441.05	7.58	2.80	12.68	4.69
105	0.07385	-2.64	7384.60	7.72	2.92	12.83	4.85
110	0.06481	-2.58	6480.76	7.85	3.04	12.96	5.02



T _{oper} (°C)	CATALOG NUMBER 2322 615 1.104						
	R _T /R ₂₅	TC (%/K)	R _T (Ω)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
115	0.05705	-2.52	5704.87	7.98	3.17	13.10	5.20
120	0.05037	-2.46	5036.67	8.11	3.29	13.23	5.37
125	0.04459	-2.41	4459.40	8.23	3.42	13.35	5.55
130	0.03959	-2.35	3959.18	8.35	3.55	13.48	5.73
135	0.03524	-2.30	3524.43	8.46	3.68	13.60	5.91
140	0.03146	-2.25	3145.52	8.58	3.81	13.72	6.10
145	0.02814	-2.20	2814.35	8.69	3.95	13.83	6.29
150	0.02524	-2.15	2524.15	8.80	4.09	13.95	6.48

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R ₂₅ AT 330000 Ω							
T _{oper} (°C)	CATALOG NUMBER 2322 615 1.334						
	R _T /R ₂₅	TC (%/K)	R _T (kΩ)	5%TOL. ΔR/R (%)	5%TOL. ΔT (K)	10%TOL. ΔR/R (%)	10%TOL. ΔT (K)
-40	33.3434	-6.58	11003.3	16.83	2.56	22.39	3.40
-35	24.1285	-6.36	7962.4	15.69	2.46	21.20	3.33
-30	17.6422	-6.16	5821.9	14.60	2.37	21.05	3.25
-25	13.0283	-5.97	4299.4	13.55	2.27	18.95	3.18
-20	9.7132	-5.78	3205.4	12.54	2.17	17.90	3.10
-15	7.3081	-5.60	2411.7	11.57	2.07	16.89	3.01
-10	5.5470	-5.43	1830.5	10.64	1.96	15.91	2.93
-5	4.2457	-5.27	1401.1	9.75	1.85	14.97	2.84
0	3.2760	-5.11	1081.1	8.88	1.74	14.07	2.75
5	2.5474	-4.96	840.63	8.05	1.62	13.20	2.66
10	1.9955	-4.81	658.52	7.25	1.51	12.35	2.57
15	1.5744	-4.67	519.55	6.47	1.39	11.54	2.47
20	1.2506	-4.54	412.71	5.72	1.26	10.76	2.37
25	1.0000	-4.41	330.00	5.00	1.13	10.00	2.27
30	0.8046	-4.29	265.53	5.70	1.33	10.73	2.50
35	0.6514	-4.17	214.95	6.38	1.53	11.44	2.75
40	0.5304	-4.05	175.02	7.03	1.73	12.13	2.99
45	0.4343	-3.94	143.31	7.67	1.94	12.79	3.24
50	0.3575	-3.84	117.97	8.28	2.16	13.44	3.50
55	0.2958	-3.74	97.62	8.88	2.36	14.06	3.76
60	0.2460	-3.64	81.18	9.46	2.60	14.67	4.03
65	0.2056	-3.55	67.83	10.02	2.83	15.26	4.30
70	0.1726	-3.45	56.94	10.56	3.06	15.83	4.58
75	0.1455	-3.37	48.02	11.09	3.29	16.38	4.86
80	0.1232	-3.28	40.66	11.61	3.53	16.92	5.15
85	0.1048	-3.20	34.57	12.11	3.78	17.44	5.45
90	0.0894	-3.12	29.52	12.59	4.03	17.95	5.75
95	0.0767	-3.05	25.30	13.07	4.29	18.45	6.05
100	0.0659	-2.98	21.76	13.53	4.54	18.93	6.36
105	0.0569	-2.91	18.78	13.97	4.81	19.40	6.68
110	0.0493	-2.84	16.27	14.41	5.08	19.86	7.00
115	0.0429	-2.77	14.14	14.84	5.35	20.30	7.32
120	0.0374	-2.71	12.33	15.25	5.63	20.74	7.66
125	0.0327	-2.65	10.79	15.65	5.91	21.16	7.99
130	0.0287	-2.59	9.463	16.05	6.20	21.57	8.34
135	0.0252	-2.53	8.326	16.43	6.49	21.98	8.68
140	0.0223	-2.48	7.347	16.81	6.79	22.37	9.04
145	0.0197	-2.42	6.500	17.17	7.09	22.75	9.40
150	0.0175	-2.37	5.767	17.53	7.40	22.13	9.76

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT 470000 Ω

T_{oper} (°C)	CATALOG NUMBER 2322 615 1.474						
	R_T/R_{25}	TC (%/K)	R_T (k Ω)	5%TOL. $\Delta R/R$ (%)	5%TOL. ΔT (K)	10%TOL. $\Delta R/R$ (%)	10%TOL. ΔT (K)
-40	37.1288	-6.79	17450.5	17.16	2.53	22.74	3.35
-35	26.5910	-6.57	12497.8	15.99	2.44	21.52	3.28
-30	19.2505	-6.36	9047.8	14.87	2.34	20.34	3.20
-25	14.0812	-6.15	6618.2	13.79	2.24	19.21	3.12
-20	10.4026	-5.96	4889.2	12.76	2.14	18.13	3.04
-15	7.7582	-5.77	3646.4	11.76	2.04	17.08	2.96
-10	5.8389	-5.60	2744.3	10.80	1.93	16.08	2.87
-5	4.4329	-5.43	2083.5	9.88	1.82	15.11	2.79
0	3.3937	-5.26	1595.0	8.99	1.71	14.18	2.70
5	2.6190	-5.10	1230.93	8.14	1.59	13.29	2.60
10	2.0367	-4.95	957.26	7.31	1.48	12.42	2.51
15	1.5956	-4.81	749.94	6.51	1.35	11.59	2.41
20	1.2589	-4.67	591.68	5.74	1.23	10.78	2.31
25	1.0000	-4.54	470.00	5.00	1.10	10.00	2.20
30	0.7995	-4.41	375.78	5.72	1.30	10.75	2.44
35	0.6433	-4.29	302.34	6.42	1.50	11.48	2.68
40	0.5207	-4.17	244.71	7.09	1.70	12.19	2.92
45	0.4239	-4.06	199.22	7.74	1.91	12.87	3.17
50	0.3470	-3.95	163.08	8.38	2.12	13.54	3.43
55	0.2856	-3.84	134.22	8.99	2.34	14.18	3.69
60	0.2362	-3.74	111.03	9.58	2.56	14.80	3.95
65	0.1964	-3.65	92.30	10.16	2.79	15.41	4.23
70	0.1640	-3.55	77.10	10.72	3.02	15.99	4.50
75	0.1377	-3.46	64.70	11.27	3.25	16.56	4.78
80	0.1160	-3.38	54.53	11.80	3.49	17.12	5.07
85	0.0982	-3.29	46.16	12.31	3.74	17.66	5.36
90	0.0835	-3.21	39.23	12.81	3.99	18.18	5.66
95	0.0712	-3.13	33.48	13.30	4.24	18.69	5.96
100	0.0610	-3.06	28.68	13.77	4.50	19.19	6.27
105	0.0525	-2.99	24.66	14.23	4.77	19.67	6.59
110	0.0453	-2.92	21.27	14.68	5.03	20.14	6.91
115	0.0392	-2.85	18.42	15.12	5.31	20.60	7.23
120	0.0340	-2.78	16.00	15.54	5.58	21.05	7.56
125	0.0297	-2.72	13.94	15.96	5.87	21.48	7.90
130	0.0259	-2.66	12.189	16.36	6.15	21.91	8.24
135	0.0227	-2.60	10.688	16.76	6.45	22.32	8.59
140	0.0200	-2.54	9.398	17.15	6.74	22.72	8.94
145	0.0176	-2.49	8.288	17.52	7.05	23.12	9.30
150	0.0156	-2.43	7.329	17.89	7.35	23.50	9.66