

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

NX3215SA

For OA / AV / Mobile Communication / Automotives

■ Features

- Compact, thin, and light weight tuning fork crystal unit.
- Excellent heat resistance and environmental characteristics.
- RoHS compliant. These can meet the requirements of re-flow profiling using lead-free solder.
- Use a metal lid: Excellent shock resistance during chip mounting process comparing to a glass lid.
- Excellent electric performance optimum for mobile communications, OA (office automation) and AV (audiovisual) applications are exhibited. (For OA / AV / Mobile Communication)
- Conforms to AEC-Q200. (For Automotives)




Pb Free

RoHS Compliant
Directive 2011/65/EU

■ Specifications

Item	Model			
	NX3215SA			
Main Application	For OA / AV / Mobile Communication		For Automotive	
Nominal Frequency	32.768kHz			
Operating Temperature Range	-40 to +85°C		-40 to +125°C	
Storage Temperature Range	-40 to +85°C		-40 to +125°C	
Level of Drive	0.1μW (Max. 0.5μW)			
Frequency Tolerance (25 ±3 °C)	±20 × 10 ⁻⁶			
Turning Point	+25°C ± 5°C			
Temperature Coefficient	-0.04 × 10 ⁻⁶ /°C ² Max.			
Load Capacitance	6.0pF	9.0pF	12.5pF	12.5pF
Equivalent Series Resistance	Max. 70kΩ		Max. 80kΩ	
Shunt Capacitance	Typ. 1.0pF / Max. 1.5pF			
Insulation Resistance	Min. 500MΩ			
Specifications Number	STD-MUA-14	STD-MUA-9	STD-MUA-8	STD-MUS-2

■ Dimensions

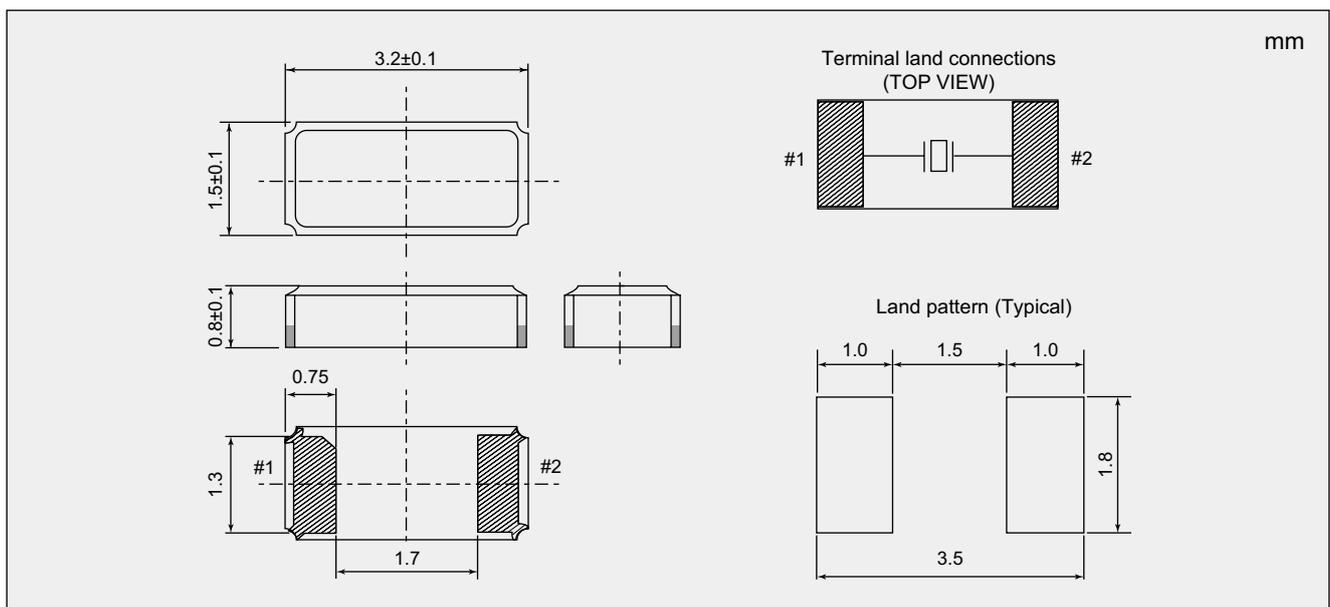

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.