



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Specification of Crystal

1	NDK Part Number	See table 1
2	NDK Specification Number	LN-CD-1
3	Type	NX5032GA
4	Electrical Characteristics	
4.1	Nominal Frequency ( $f_{nom}$ )	See table 1
4.2	Overtone order	Fundamental
4.3	Frequency Tolerance	$\pm 50 \times 10^{-6}$ max. ( +25 °C )
4.4	Frequency Versus Temperature Characteristics	$\pm 50 \times 10^{-6}$ max. ( -10 ~ +70 °C ) The reference temperature shall be +25 °C
4.5	Equivalent Series Resistance ( $R_r$ )	See table 1
4.6	Shunt Capacitance ( $C_0$ )	NA
4.7	Maximum Drive Level	500 $\mu$ W max.
5	Measurement Circuit	
5.1	Frequency Measurement	
5.1.1	Measuring Instrument	$\pi$ -network
5.1.2	Load Capacitance ( $C_L$ )	8 pF
5.1.3	Level of Drive	50 $\mu$ W
5.2	Equivalent Resistance Measurement	
5.2.1	Measuring Instrument	$\pi$ -network
5.2.2	Load Capacitance ( $C_L$ )	Series
5.2.3	Level of Drive	50 $\mu$ W
6	Operable Temperature Range	-10 ~ +70 °C
7	Storage Temperature Range	-40 ~ +85 °C
8	Dimension	

(Unit: mm)


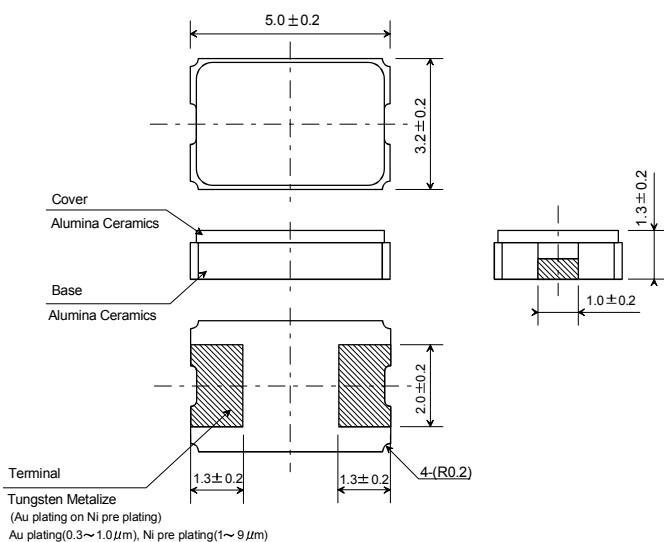


Table 1

$f_{nom}$ (MHz)	$R_r$ ( $\Omega$ ) max.	NDK Part Number
10.000	120	NX5032GA-10.000M-LN-CD-1
12.000	120	NX5032GA-12.000M-LN-CD-1
12.288	120	NX5032GA-12.288M-LN-CD-1
13.560	120	NX5032GA-13.560M-LN-CD-1
16.000	120	NX5032GA-16.000M-LN-CD-1
16.384	120	NX5032GA-16.384M-LN-CD-1
20.000	70	NX5032GA-20.000M-LN-CD-1
24.000	70	NX5032GA-24.000M-LN-CD-1
25.000	70	NX5032GA-25.000M-LN-CD-1
27.000	70	NX5032GA-27.000M-LN-CD-1
30.000	50	NX5032GA-30.000M-LN-CD-1
32.000	50	NX5032GA-32.000M-LN-CD-1
40.000	50	NX5032GA-40.000M-LN-CD-1
48.000	50	NX5032GA-48.000M-LN-CD-1

REFERENCE LAND PATTERN (TYPICAL)



Terminal Land Connection [ Top View ]

