



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




NX5032GB

For OA / AV

■ Features

A de facto standard small surface-mount type crystal unit, ideal for OA (office automation) and AV (audiovisual) applications.

- Excellent electrical performance, ideal for OA and AV applications.
- Meets the requirements for re-flow profiling using lead-free solder.
- Supports low height mounting (product height: 1.0 mm typ.).

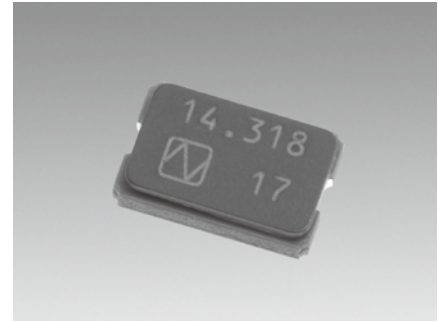


RoHS Compliant
Directive 2011/65/EU

■ Specifications

Item	Model	NX5032GB	
Nominal Frequency		12 to 50 MHz	50 to 55 MHz
Overtone Order		Fundamental	
Frequency Tolerance (25 ±3 °C)		±20 × 10 ⁻⁶	
Frequency versus Temperature Characteristics (with reference to +25 °C)		±30 × 10 ⁻⁶	
Operating Temperature Range		-10 to +70 °C	
Storage Temperature Range		-40 to +85 °C	
Equivalent Series Resistance		Refer to *1	
Level of Drive		50 μW (Max. 500 μW)	
Load Capacitance		8 pF	
Specifications Number		STD-CSK-5	STD-CKW-4

■ Dimensions

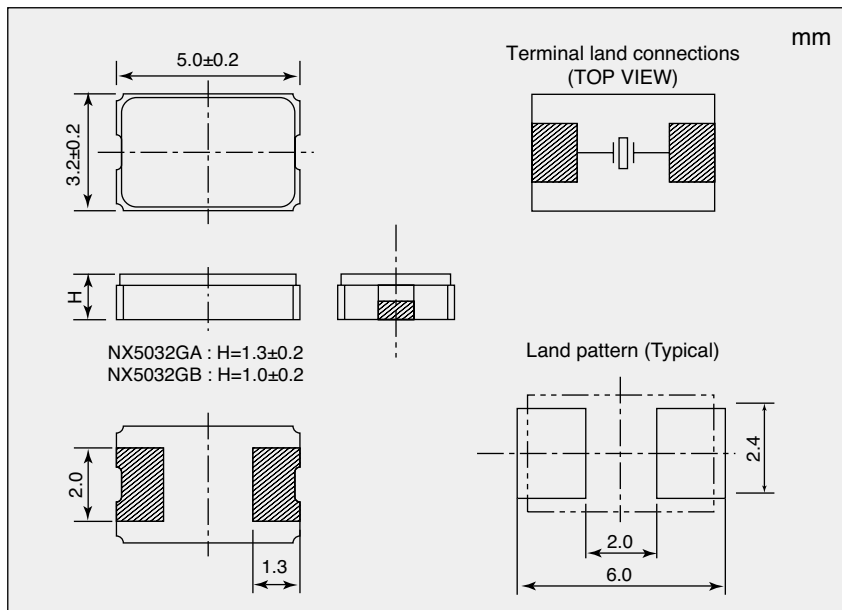

*1 Equivalent Series Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]
8 to 9.5	300
9.5 to 15	100
15 to 55	50

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.