



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



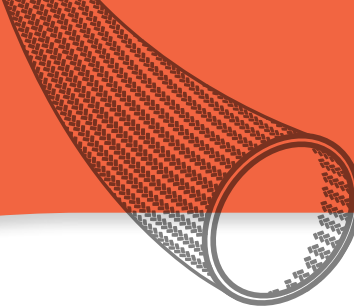

- **Soft, Pliable And Strong**
- **Exceptional Thermal Stability**
- **Protects To 662°F**
- **Resists Gasoline And Engine Chemicals**
- **Cut And Abrasion Resistant**

Put-Ups

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
		Min.	Max.				
1/8"	NXN0.13	1/16"	1/4"	100'	25'	GN & NT	0.12
1/4"	NXN0.25	1/8"	5/16"	100'	25'	GN & NT	0.50
5/16"	NXN0.31	7/32"	7/16"	100'	25'	GN & NT	0.60
3/8"	NXN0.38	1/4"	1/2"	100'	25'	GN & NT	0.67
1/2"	NXN0.50	5/16"	5/8"	100'	25'	GN & NT	0.91
5/8"	NXN0.63	7/16"	7/8"	100'	25'	GN & NT	1.10
3/4"	NXN0.75	9/16"	1"	100'	25'	GN & NT	1.34
1"	NXN1.00	3/4"	1 1/8"	100'	25'	GN & NT	2.42
1 1/4"	NXN1.25	1"	1 1/2"	100'	25'	GN & NT	3.49
1 1/2"	NXN1.50	1 1/4"	1 3/4"	100'	25'	GN & NT	4.03
1 3/4"	NXN1.75	1 1/2"	2"	100'	25'	GN & NT	4.76



**Cut Cleanly
Scissors**

Material

Polyaramid Polymetaphenylene Isophthalamide

Grade

NXN

Drawing Number


TF001NX-WD

Soft, Pliable Flame Protection To 662°F

Braided Flexo NX is made from the same fibers of DuPont™ Nomex® that have been in protective clothing used for years by race car drivers, municipal fire departments and oil rig personnel to provide that extra level of comfort and protection from the dangers that come with working in and around intense flame and heat. Our Flexo NX sleeving will do the same for your wires, hoses and cables.

Flexo NX will protect your application in temperatures up to 662° F. It is unaffected by short term exposure to most acids, bases, solvents and common engineering chemicals. Despite the soft touch and smooth appearance associated with woven aramid fibers, Flexo NX is incredibly strong, with a tensile strength of 90,000 psi.

- **Colors Available:**
2 = GN and NT

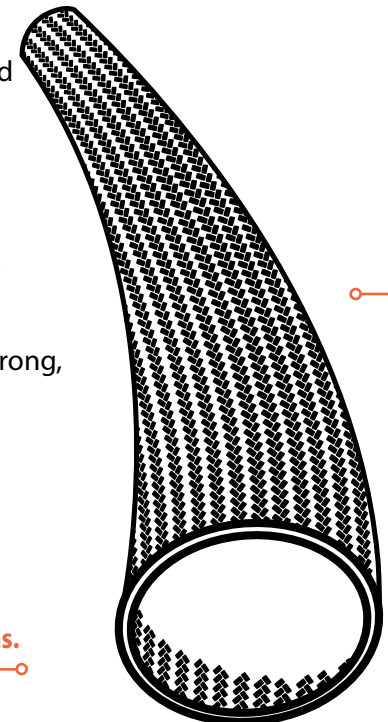

- **Provides full coverage and protection on even the most exposed applications. Cuts easily with regular scissors and the smooth surface eases installation even over long wire runs. The construction allows slight expansion to accommodate irregular surfaces and tight turns.**

Colors Available:



Green (GN) and Natural (NT).

DuPont™ and Nomex® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.



www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871

**HALOGEN
FREE**





ABRASION **FLAMMABILITY**

Abrasion Resistance
Low

Does Not Melt or Flow Below
662°F/350°C

Abrasion Test Machine
Taber 5150

Retains its integrity at temperatures over 489°F/254°C (the melting point of Nylon) or in presence of Beta, Gamma and X-Ray Radiation or when exposed to High Humidity or Moisture.

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
80°F

Humidity
70%

Material Very Visibly
Being Pulled Apart
25 Test Cycles

Hole Through
Material Destroyed
350 Test Cycles

Pre-Test Weight
2271.03 mg

Post-Test Weight
2097.67 mg

Test End Loss Of Mass
Point Of Destruction
173.36 mg

Melt Point
ASTM D-2117
662°F (350°C)

Maximum Continuous
Mil-I-23053
428°F (220°C)

Minimum Continuous
-76°F (-60°C)



CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Strong Bases _____ 1
Strong Acids _____ 2
Strong Oxidants _____ 2
UV Light _____ 2
Petroleum _____ 1
Halogen Free _____ Yes
RoHS _____ Yes

PHYSICAL PROPERTIES

Monofilament Diameter _____ NA
ASTM D-204

Flammability Rating _ Self Extinguishing
FMVSS-302 Approved

Recommended Cutting _____ Scissor

Colors _____ 2

Wall Thickness _____ .016

Tensile Strength (Yarn) _____ 8
ASTM D-2256 Lbs

Specific Gravity *ASTM D-792* _____ 1.38

Moisture Absorption _____ 4
% ASTM D-570

Hard Vacuum Data *ASTM E-595*

TM _____ 3.94

CVCM _____ .18

WVR _____ 2.91

Oxygen Index _____ 28
ASTM D-2863