



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



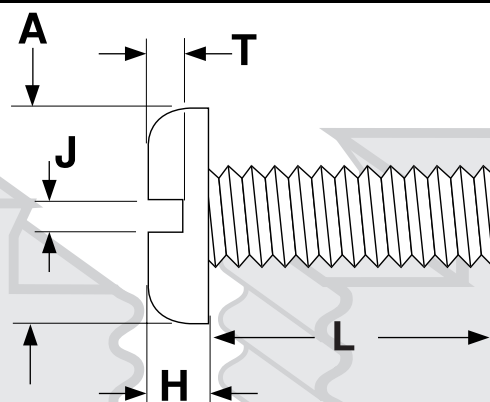

NYLON PAN HEAD MACHINE SCREWS

Nominal Size	A		H		J		T	
	Head Diameter		Height of Head		Width of Slot		Depth of Slot	
	Max	Min	Max	Min	Max	Min	Max	Min
1	.142	.130	.046	.038	.026	.019	.027	.018
2	.167	.155	.053	.045	.031	.023	.031	.022
4	.219	.205	.068	.058	.039	.031	.040	.030
6	.270	.256	.082	.072	.048	.039	.050	.037
8	.322	.306	.096	.085	.054	.045	.058	.045
10	.373	.357	.110	.099	.060	.050	.068	.053
1/4	.492	.473	.144	.130	.075	.064	.087	.070

Tolerance on Length	Nominal Screw Size	Nominal Screw Length			
		Up to 1/2 in., incl.	Over 1/2 to 1 in., incl.	Over 1 to 2 in., incl.	Over 2 in.
	1 thru 10	-0.02	-0.03	-0.06	-0.09
1/4	-0.03	-0.03	-0.06	-0.09	

Description	An externally threaded fastener with a head that has slightly rounded sides, a flat top and a flat underside.
Applications/ Advantages	To be used with internally threaded nylon fasteners in applications that require corrosion resistance or electrical insulation. Nylon's other advantages include: resistance to greases and oils; a low coefficient of friction; ability to maintain its torque strength when exposed to a wide range of temperatures.
Material	Nylon 6/6
Hardness	Rockwell M80
<i>Tensile, shear and torque data is offered for informational purposes only. This data should not be used to set specification limits. It is always wise to test parts in the actual application.</i>	
Tensile Test (Break Pounds)	2-56: 19 lbs.; 4-40: 41 lbs.; 6-32: 69 lbs.; 8-32: 108 lbs.; 10-24: 149 lbs.; 10-32: 165 lbs.; 1/4-20: 312 lbs.
Double Shear (Break Pounds)	2-56: (No test); 4-40: 50 lbs.; 6-32: 97 lbs.; 8-32: 164 lbs.; 10-24: 257 lbs.; 10-32: 241 lbs.; 1/4-20: 432 lbs.
Maximum Torque (before deformation)	2-56: (No test); 4-40: 12-16 in. oz.; 6-32: 18-20 in. oz.; 8-32: 2-3 in. lbs.; 10-24: 2-4 in. lbs.; 10-32: 3-4 in. lbs.; 1/4-20: 9-10 in. lbs.
Thermal Properties	Melting Point: 500° F Continuous Use Temperature: 185° F