



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NYC222, NYC226, NYC228

Sensitive Gate Silicon Controlled Rectifiers

Reverse Blocking Thyristors

Designed and tested for repetitive peak operation required for CD ignition, fuel ignitors, flash circuits, motor controls and low-power switching applications.

Features

- Blocking Voltage to 600 V
- High Surge Current – 15 A
- Very Low Forward “On” Voltage at High Current
- Low-Cost Surface Mount SOT–223 Package
- These are Pb–Free Devices

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Peak Repetitive Off–State Voltage (Note 1) ($R_{GK} = 1\text{K}$, $T_J = -40$ to $+110^\circ\text{C}$, Sine Wave, 50 to 60 Hz, Gate Open)	V_{DRM} , V_{RRM}	50 400 600	V
On–State Current RMS (180° Conduction Angles, $T_C = 80^\circ\text{C}$)	$I_{T(RMS)}$	1.5	A
Average On–State Current, ($T_C = 65^\circ\text{C}$, $f = 60$ Hz, Time = 1 sec)	$I_{T(RMS)}$	2.0	A
Peak Non-repetitive Surge Current, @ $T_A = 25^\circ\text{C}$, (1/2 Cycle, Sine Wave, 60 Hz)	I_{TSM}	15	A
Circuit Fusing Considerations ($t = 8.3$ ms)	I^2t	0.9	A^2s
Forward Peak Gate Power (Pulse Width ≤ 1.0 μsec , $T_A = 25^\circ\text{C}$)	P_{GM}	0.5	W
Forward Average Gate Power ($t = 8.3$ msec, $T_A = 25^\circ\text{C}$)	$P_{G(AV)}$	0.1	W
Forward Peak Gate Current (Pulse Width ≤ 1.0 μs , $T_A = 25^\circ\text{C}$)	I_{FGM}	0.2	A
Reverse Peak Gate Voltage (Pulse Width ≤ 1.0 μs , $T_A = 25^\circ\text{C}$)	V_{RGM}	5.0	V
Operating Junction Temperature Range @ Rated V_{RRM} and V_{DRM}	T_J	-40 to $+110$	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 to $+150$	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. V_{DRM} and V_{RRM} for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.



Expertise Applied | Answers Delivered

Littelfuse.com


SCRs
1.5 AMPERES RMS
400 thru 600 VOLTS



MARKING DIAGRAM



SOT-223
CASE 318E
STYLE 11



- A = Assembly Location
- Y = Year
- W = Work Week
- 22xST = Specific Device Code
x = 2, 6 or 8
- = Pb–Free Package

(Note: Microdot may be in either location)

PIN ASSIGNMENT

Pin	Assignment
1	K (Cathode)
2	A (Anode)
3	G (Gate)
4	A (Anode)

ORDERING INFORMATION

Device	Package	Shipping
NYC222STT1G	SOT–223 (Pb–Free)	1000 /Tape & Reel
NYC226STT1G	SOT–223 (Pb–Free)	1000 /Tape & Reel
NYC228STT1G	SOT–223 (Pb–Free)	1000 /Tape & Reel

NYC222, NYC226, NYC228

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Ambient PCB Mounted	$R_{\theta JA}$	156	$^{\circ}C/W$
Thermal Resistance, Junction-to-Tab Measured on MT2 Tab Adjacent to Epoxy	$R_{\theta JT}$	25	$^{\circ}C/W$
Maximum Device Temperature for Soldering Purposes for 10 Secs Maximum	T_L	260	$^{\circ}C$

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}C$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Peak Repetitive Forward or Reverse Blocking Current ($V_{AK} = \text{Rated } V_{DRM}/V_{RRM}$; $R_{GK} = 1000 \Omega$)	I_{DRM}, I_{RRM}	$T_C = 25^{\circ}C$	-	-	10	μA
		$T_C = 110^{\circ}C$	-	-	200	μA

ON CHARACTERISTICS

Peak Forward On-State Voltage (Note 2) ($I_{TM} = 2.2 \text{ A Peak}$)	V_{TM}	-	1.2	1.7	V	
Gate Trigger Current (dc) (Note 3) ($V_{AK} = 7 \text{ Vdc}$, $R_L = 100 \Omega$)	I_{GT}	$T_C = 25^{\circ}C$	-	30	200	μA
		$T_C = -40^{\circ}C$	-	-	500	
Gate Trigger Voltage (dc) (Note 3) ($V_{AK} = 7 \text{ Vdc}$, $R_L = 100 \Omega$)	V_{GT}	$T_C = 25^{\circ}C$	-	-	0.8	V
		$T_C = -40^{\circ}C$	-	-	1.2	
Gate Non-Trigger Voltage ($V_{AK} = V_{DRM}$, $R_L = 100 \Omega$)	V_{GD}	0.1	-	-	V	
Holding Current ($V_{AK} = 12 \text{ V}$, $R_{GK} = 1000 \Omega$) Initiating Current = 200 mA	I_H	$T_C = 25^{\circ}C$	-	2.0	5.0	mA
		$T_C = -40^{\circ}C$	-	-	10	


DYNAMIC CHARACTERISTICS

Critical Rate of Rise of Off-State Voltage ($T_C = 110^{\circ}C$)	dv/dt	-	25	-	$V/\mu s$
Critical Rate of Rise of On-State Current ($T_C = 110^{\circ}C$, $I_G = 2 \times I_{GT}$, $R_{GK} = 1 \text{ k}\Omega$)	di/dt	-	20	-	$A/\mu s$

- Pulse Width = 1.0 ms, Duty Cycle $\leq 1\%$.
- R_{GK} Current not included in measurement.

Voltage Current Characteristic of SCR

Symbol	Parameter
V_{DRM}	Peak Repetitive Off State Forward Voltage
I_{DRM}	Peak Forward Blocking Current
V_{RRM}	Peak Repetitive Off State Reverse Voltage
I_{RRM}	Peak Reverse Blocking Current
V_{TM}	Peak on State Voltage
I_H	Holding Current

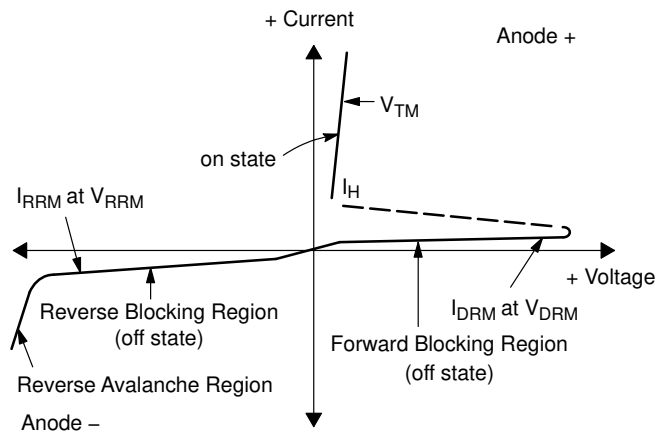

CURRENT DERATING

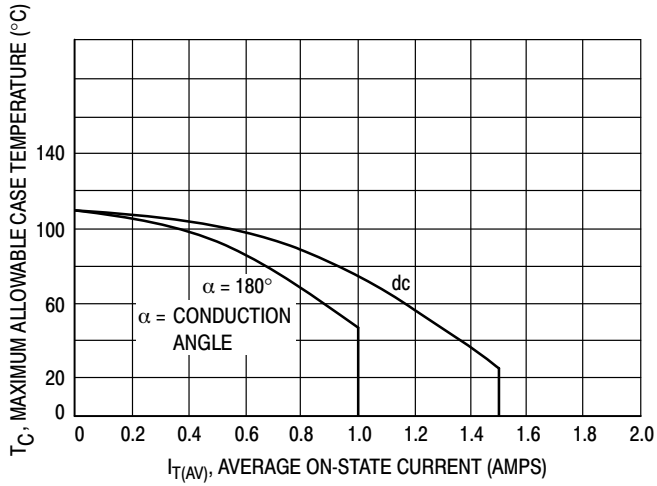


Figure 1. Maximum Case Temperature

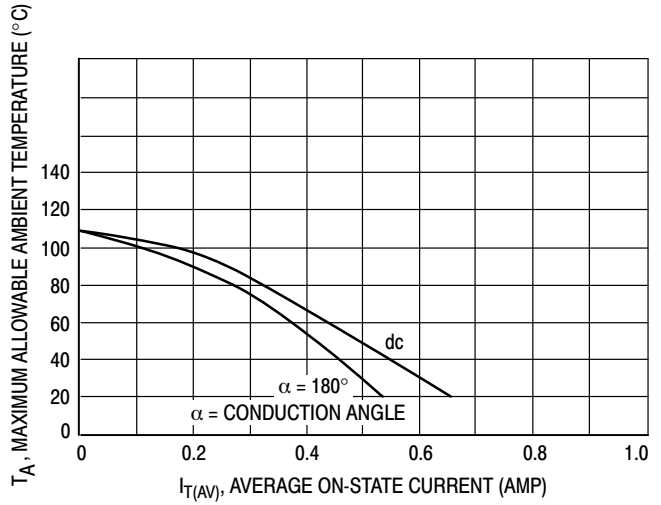


Figure 2. Maximum Ambient Temperature

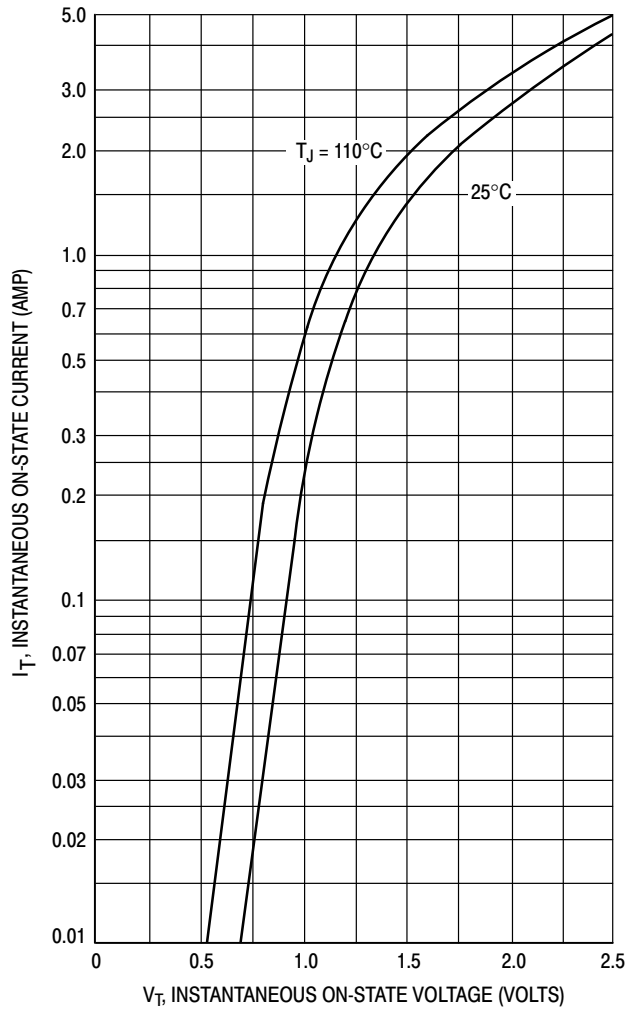


Figure 3. Typical Forward Voltage

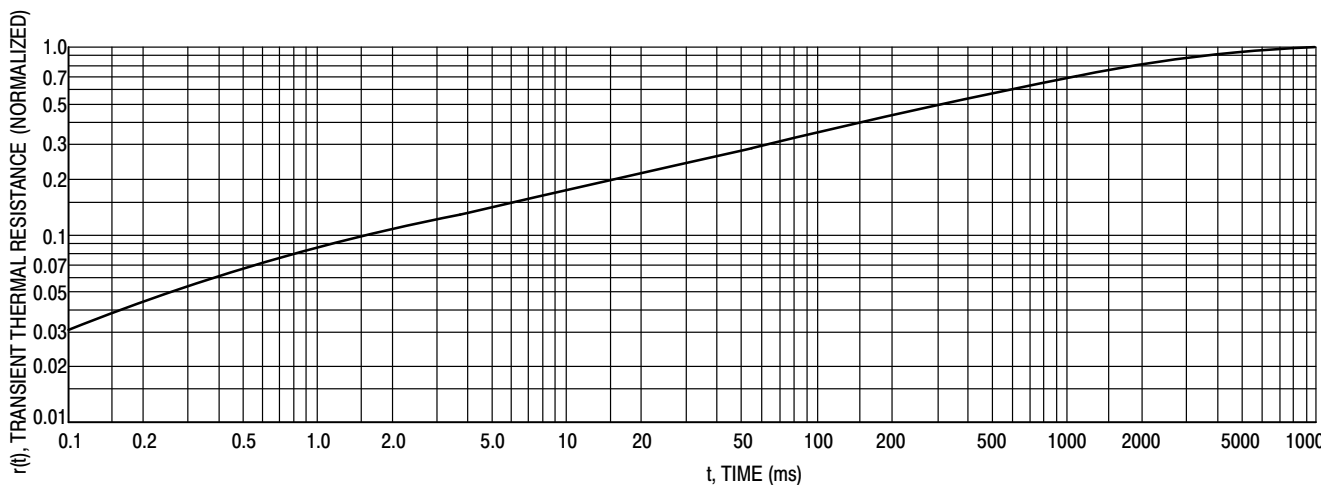


Figure 4. Thermal Response

TYPICAL CHARACTERISTICS

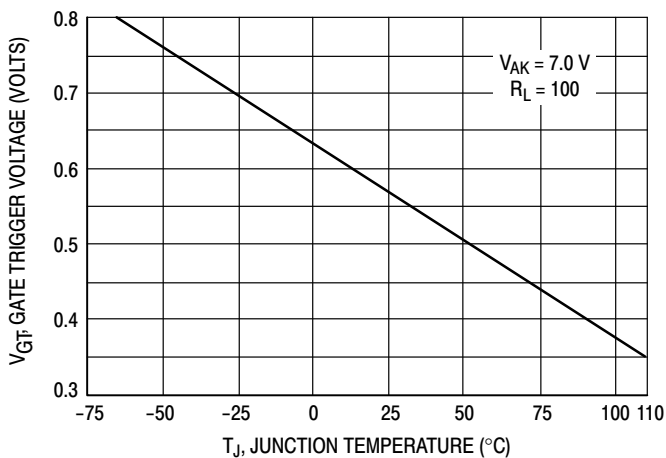


Figure 5. Typical Gate Trigger Voltage

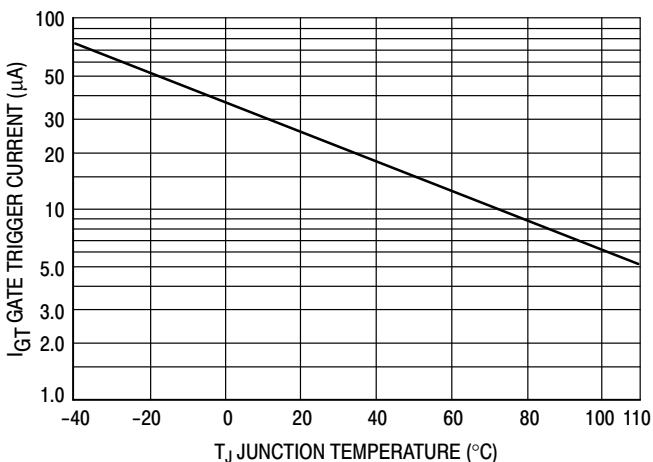


Figure 6. Typical Gate Trigger Current

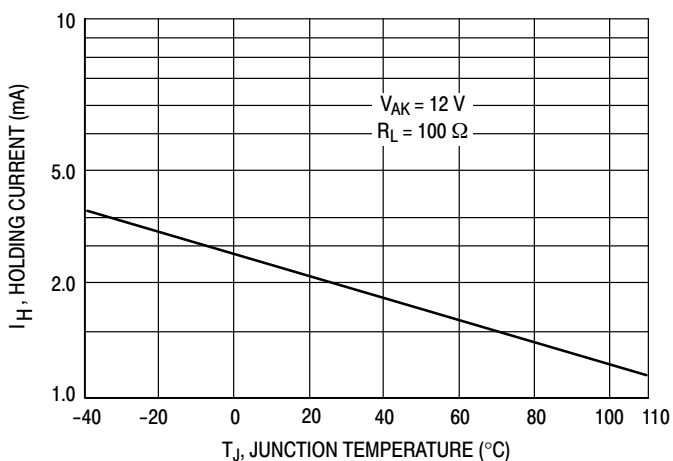


Figure 7. Typical Holding Current


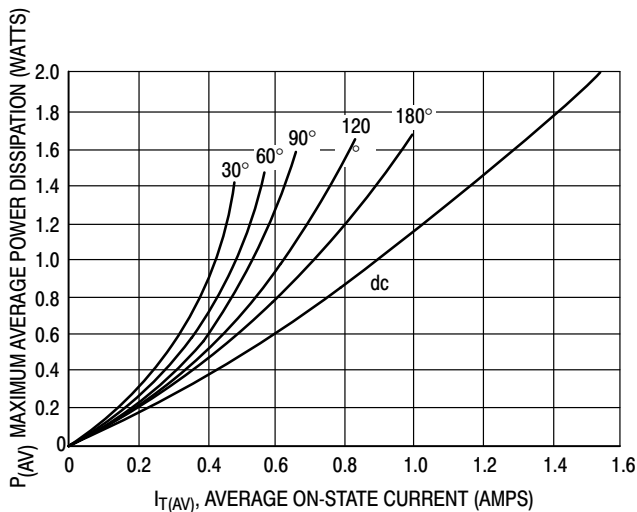


Figure 8. Power Dissipation

NYC222, NYC226, NYC228

PACKAGE DIMENSIONS

SOT-223 (TO-261)
CASE 318E-04
ISSUE N

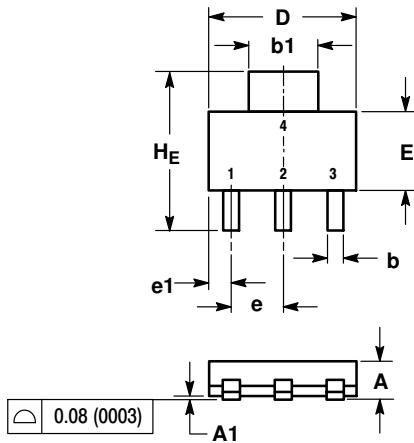


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.50	1.63	1.75	0.060	0.064	0.068
A1	0.02	0.06	0.10	0.001	0.002	0.004
b	0.60	0.75	0.89	0.024	0.030	0.035
b1	2.90	3.06	3.20	0.115	0.121	0.126
c	0.24	0.29	0.35	0.009	0.012	0.014
D	6.30	6.50	6.70	0.249	0.256	0.263
E	3.30	3.50	3.70	0.130	0.138	0.145
e	2.20	2.30	2.40	0.087	0.091	0.094
e1	0.85	0.94	1.05	0.033	0.037	0.041
L	0.20	---	---	0.008	---	---
L1	1.50	1.75	2.00	0.060	0.069	0.078
HE	6.70	7.00	7.30	0.264	0.276	0.287
theta	---	---	---	---	---	---

STYLE 11:
PIN 1
1. MT 1
2. MT 2
3. GATE
4. MT 2

SOLDERING FOOTPRINT

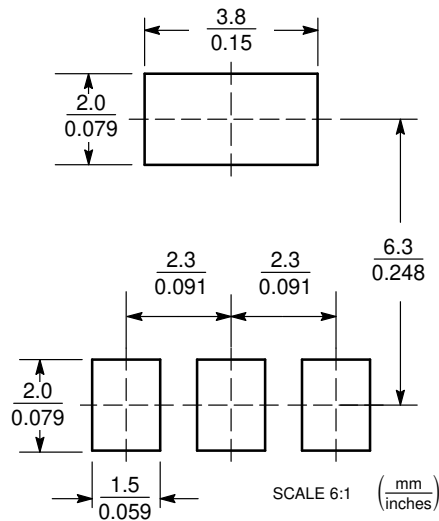

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

Littelfuse.com