



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





actual size

# Oscillator JO22H · 1.8 V

- High Stability Oscillator with Stop Function · 2.5 x 2.0 mm
- Stability suitable for wireless application (Bluetooth, WiFi etc.)
- LVCMOS / HCMOS compatible output
- Low phase jitter, no PLL
- Flat seam sealed ceramic/metal package



RoHS compliant



Pb free



REACH compliant



Conflict mineral free

GENERAL DATA		JO22H 1.8 V
<b>TYPE</b>	JO22H 1.8 V	
frequency range	9.5 ~ 54.0 MHz (15 pF max.)	
frequency stability over all*	± 10ppm ~ ± 20ppm see table 1	
current consumption	4 mA max.	
supply voltage V <sub>DC</sub>	1.8 V ± 5%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +85 °C
output	rise & fall time	5 nsec max.
	load max.	15 pF
	current max.	4.0 mA
	low level max.	0.4 V
	high level min.	V <sub>DC</sub> - 0.4 V
output enable time max.	10 ms	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby function	stop	
standby current max.	5 µA	
phase jitter 12 kHz ~20 MHz	< 1.0 ps RMS	
symmetry at 0.5 x V <sub>DC</sub>	45% ~ 55% max.	

\* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

TABLE 1: FREQUENCY STABILITY CODE				
stability code	D	E	F	
	± 20 ppm	±15 ppm	± 10 ppm	
-20 °C ~ +70 °C	○	○	○	
-40 °C ~ +85 °C	○	○	△	

○ available △ ask, if available

TABLE 2: RISE & FALL TIME MAX.	
5 ns: 9.5 ~ 54.0 MHz	<b>note:</b> - specific data on request - rise time: 0.2 V <sub>DC</sub> ~ 0.8 V <sub>DC</sub> - fall time: 0.8 V <sub>DC</sub> ~ 0.2 V <sub>DC</sub>

ENABLE / DISABLE FUNCTION	
pin #1 (e/d control)	pin #3 (output)
open	active
high "1" (V <sub>IH</sub> ≥ 0.7 V <sub>DC</sub> )	active
low "0" (V <sub>IL</sub> ≤ 0.3 V <sub>DC</sub> )	high impedance
<b>stop function:</b> • oscillator stops • output high impedance	

### DIMENSIONS

top view      side view      bottom view      pad layout      pin connection      in mm

# 1: e/d  
# 2: ground  
# 3: output  
# 4: V<sub>DC</sub>


### ORDER INFORMATION

<b>0</b>	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	9.5 ~ 54.0 MHz	JO22H	see table 1	1.8 = 1.8 V	1 = 15 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C

**Example: 0 20.0-JO22H-E-1.8-1-T1-LF** (Suffix LF = RoHS compliant / Pb free)

# Oscillator J022H · 1.8 V · Low Power


## TAPING SPECIFICATION

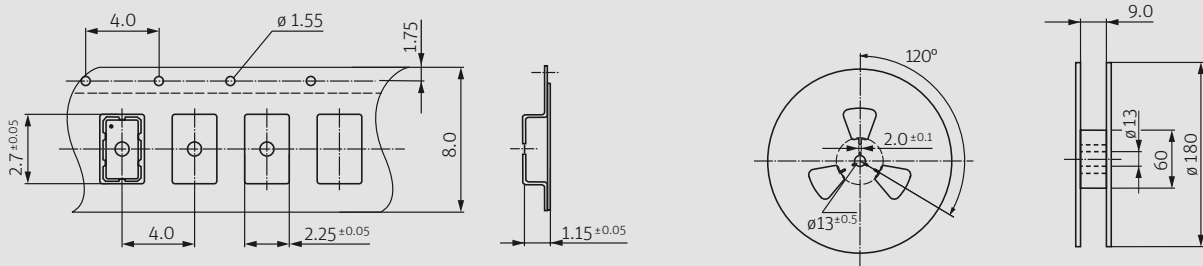

500 pcs per reel, 1000 pcs per reel on request Feeding →

in mm

## REFLOW SOLDERING PROFILE

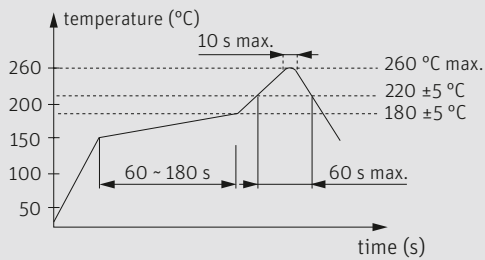

note: parts are also suitable for soldering systems with lead (Pb) content

## MARKING

frequency

company stability code / data code

data code: A ~ M: Jan. - Dec.

7: 2017 8: 2018 9: 2019 0: 2020 1: 2021 2: 2022

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

## PACKAGING NOTE

- standard packing unit is 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk