



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!








Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



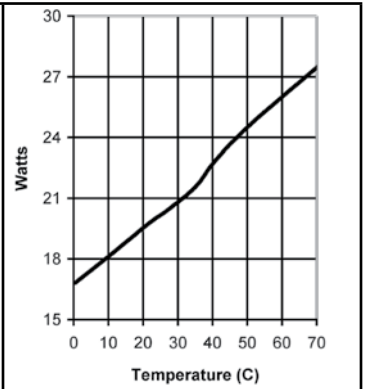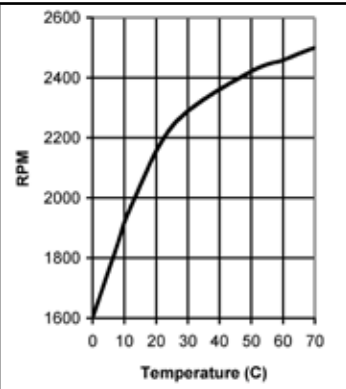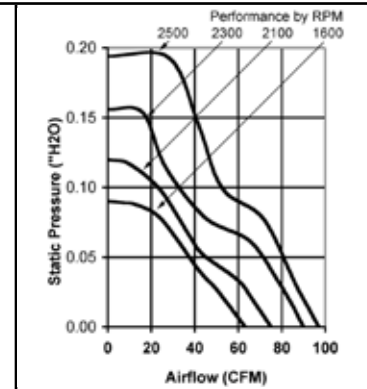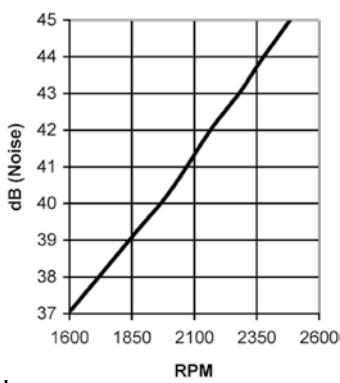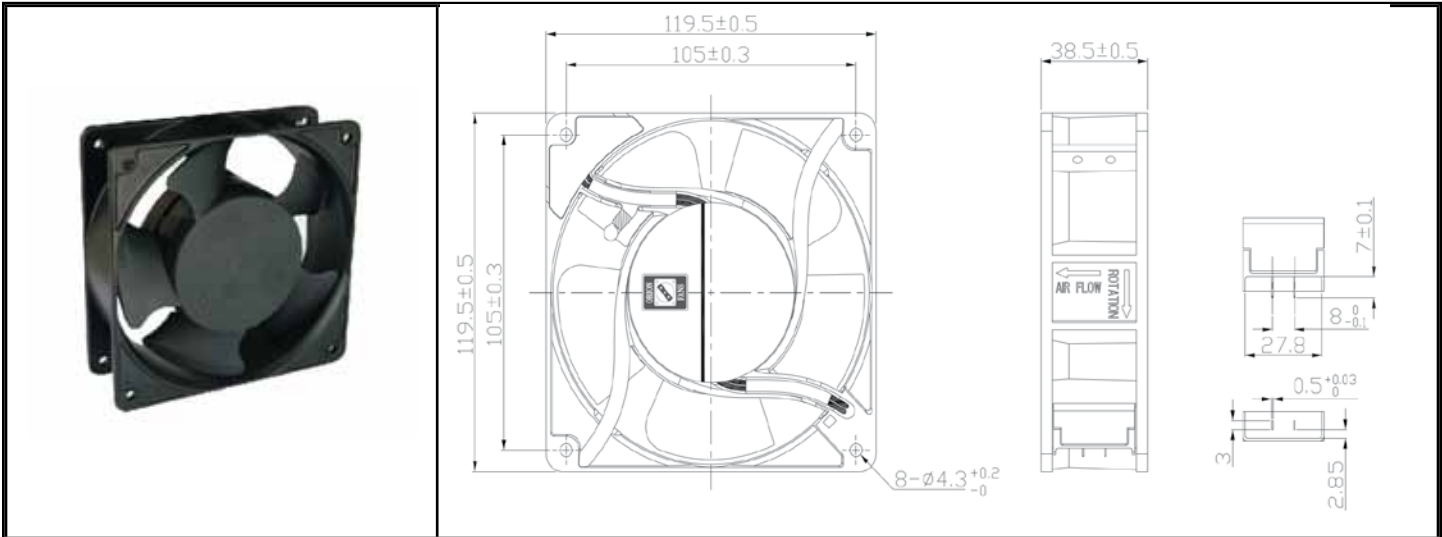

Model Number	OA109AP-11-1TB03	OA109AP-22-1TB03
Part Number	210315031	210615031
Frame	Aluminum Alloy	Aluminum Alloy
Impeller	PBT, UL94V-0	PBT, UL94V-0
Connection	Terminal	Terminal
Motor	AC shaded pole, Impedance protected	AC shaded pole, Impedance protected
Bearing System	Dual Ball	Dual Ball
Insulation Resistance	>100M ohm between lead wire and frame (500VDC)	>100M ohm between lead wire and frame (500VDC)
Dielectric Strength	1 min at 1500VAC, 50.60Hz	1 min at 1500VAC, 50.60Hz
Nominal Voltage	115 VAC	230 VAC
Nominal Current (0C ~ 70C)	0.20 ~ 0.25 A	0.07 ~ 0.12 A
Input Power (0c ~ 70C)	16 ~ 27.6 W	8 ~ 19.5 W
Rated Speed (RPM) (0C ~ 70C)	1600 ~ 2500	1600 ~ 2500
Airflow (CFM)	63 ~ 97	63 ~ 97
Noise (dB)	37 ~ 45	37 ~ 45
Operating Temperature	-10C ~ +70C	-10C ~ +70C
Life Expectancy	60,000 hours L10 @ 40C	60,000 hours L10 @ 40C