

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








OA109EC Series



AC Fan - 115V / 230V Universal Input 120x38mm (4.7"x 1.5")



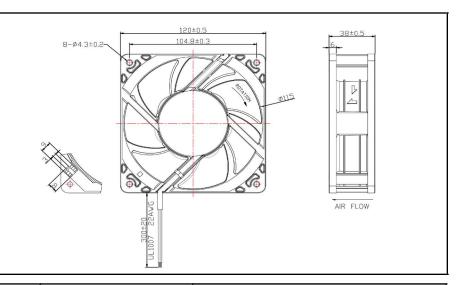

Frame	PBT, UL94V-O plastic	
Impeller	PBT, UL94V-O plastic	Ope Ball -200
Connection	2x Lead wires,(300mm) or Terminals	<u>Life</u> Ball
Motor	EC Motor, thermally protected	
Bearing System	Dual ball	
Insulation Resistance	>10M ohm between leadwire and frame (500VDC)	Wei .64∃
Dielectric Strength	1 sec at 1800 VAC, 50/60Hz	m2

Operating Temperature
Ball Bearing
-20C ~ +70C

Life Expectancy
Ball Bearing
60,000 hours (L10 at 40C)

Weight .64 lbs

	inch 0.30					1
0	0.30					
STATIC PRESSURE H ₂ 0	0.20	1				115 VAC
ESSO	0.15					230 VAC
IC PR	0.10					
STAT	0.05					
	0.00	20 30	40 50 6	0 70 80	90 100 1] 10 CFM

Model Number	OA109EC-UR-1*B
Nominal Voltage	115/230 univ. input
Voltage Range	90 ~ 265 VAC
Rated Current	.08A @ 115V, .06A @ 230V
Nominal Power	4.9W @ 115V, 5.2W @ 230V
Rated Speed (RPM)	3200
Airflow (CFM)	106
Noise Level (dB)	43
Max. Static Pressure	0.34" H ₂ 0

^{*} Indicate "T" (Terminal), or "W" (12" Wire Leads)