

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








## **OA60EC Series**



## EC Fan Universal voltage 60x25mm (2.36"x 1.0")



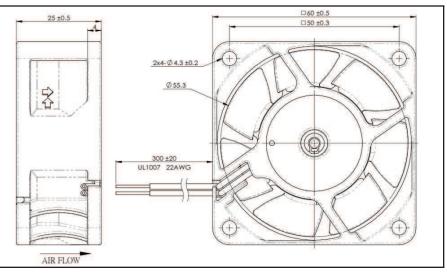

Frame	PBT UL94V-0 Plastic				
Impeller	PBT UL94V0- Plastic				
Connection	2 Lead wires				
Motor	Brushless EC motor, electronically protected				
Bearing System	Dual ball				
Insulation Resistance	>10M ohm between lead- wire and frame (500VDC)				
Dielectric Strength	1 secat 1800 VAC, 50/60Hz				

Operating Temperature **Ball Bearing** -20C ~ +70C

Life Expectancy **Ball Bearing** 50,000 hours (L10 at 40C)

Weight: ~60 grams

Storage Temperature -30C ~ +75C

m2

0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5 20.0 Airflow (CFM)	<b>(</b> )	Static Pressure ("H <sub>2</sub> O)	0.175 0.150 0.125 0.100 0.075 0.050	0	5	0Hz	60Hz				
		Sta	0.025								
			0	.0	2.5	5.	0		15.0	17.5	20.0

Part Number	OA60EC-UR-1WB
Nominal Voltage	95-264 VAC
Rated Power	2.1W/2.4W (115/230VAC)
Locked Rotor Current	0.09/0.05A (115/230VAC)
Frequency (Hz)	50 / 60
Rated Speed (RPM)	3950
Airflow (CFM)	19.5
Noise Level (dB)	31
Max. Static Pressure	0.17"H20









