



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



OAB18055 Series



AC Blower, ball bearing
182x55 (7.17"x 2.17")

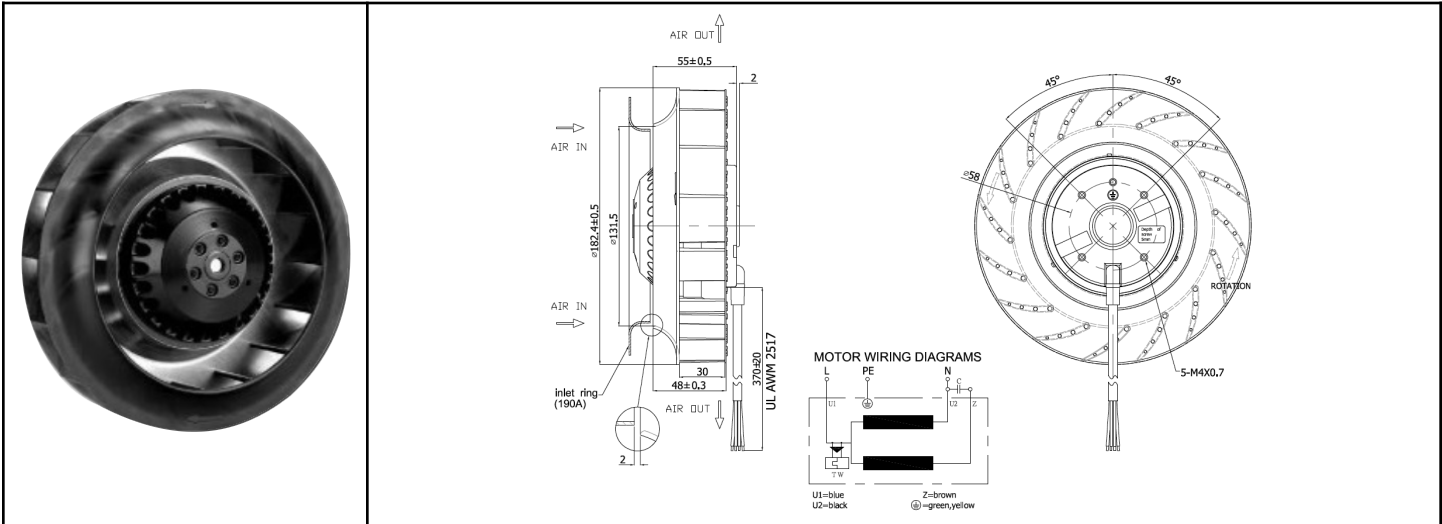

Backwards Curved Impeller		<p><u>Insulation Housing:</u> AC1500V / 1 minute</p> <p><u>Insulation Resistance:</u> > 100 M ohms DC500V</p> <p><u>Operating Temperature</u> -40 C ~ +60C</p> <p><u>Life Expectancy</u> 40,000 hours (L10, 40C) Ball bearing</p> <p>IP55 Rated Weight 2.65 lbs.</p> <p>m2</p>	<p>Blue = 60Hz Red = 50Hz</p>
Frame & Impeller	<p>Frame - Diecast aluminum Impeller - UL94V-O Thermoplastic</p>		
Connection	Lead Wires		
Motor	<p>AC Capacitor drive 10uF/250V (115V) 2uF/450V (230V) (Capacitor Included)</p>		
Bearing System	Dual Ball		

Part Number	OAB18055-11-1WB	OAB18055-22-1WB
Nominal Voltage	115 VAC (50/60 Hz)	230 VAC (50/60 Hz)
Nominal Current (Amps)	0.60 / 0.70	0.30 / 0.34
Locked Current (Amps)	0.92 / 0.95	0.46 / 0.48
Rated Power	63 / 78 W	63 / 78 W
Rated Speed (RPM)	2550 / 2800	2550 / 2800
Airflow (CFM)	265 / 290	265 / 290
Noise Level (dB)	64 / 67	64 / 67
Max. Static Pressure	1.0 / 1.4" H ₂ O	1.0 / 1.4" H ₂ O