



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

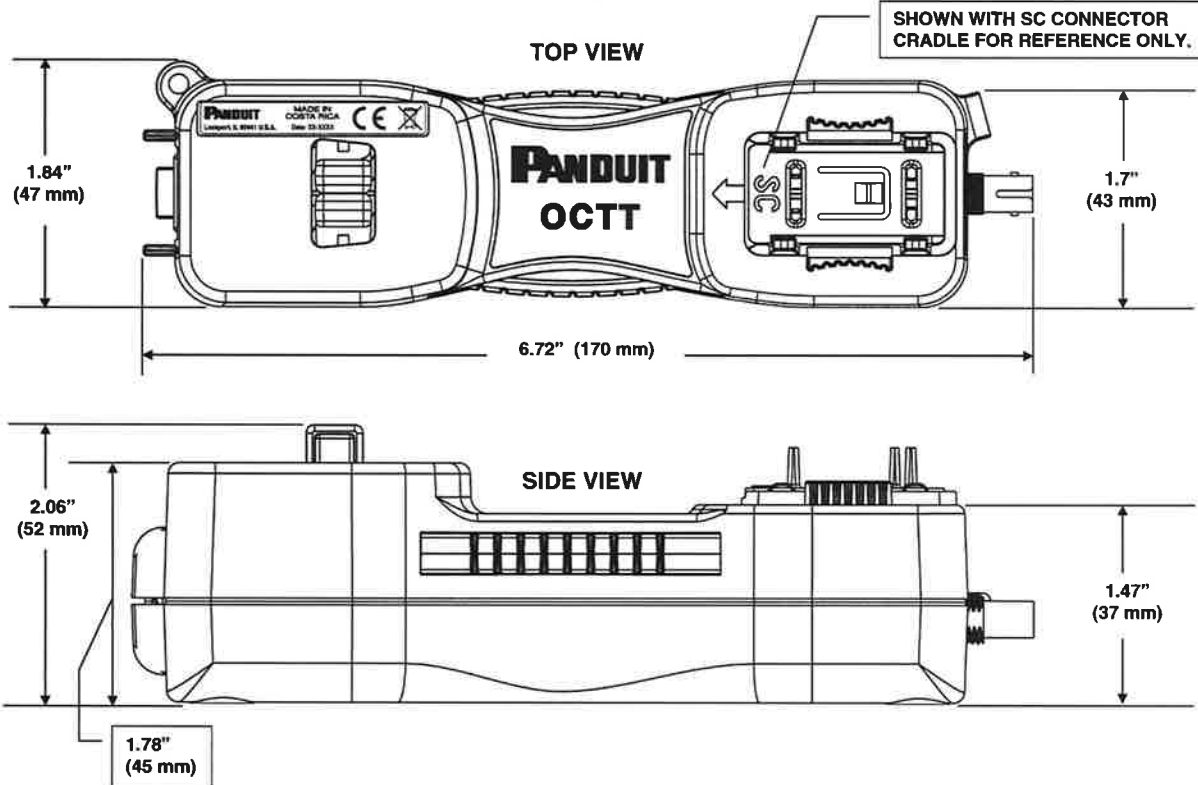

**NOTES, UNLESS OTHERWISE SPECIFIED:**

**OCTT TOOL USE:**

This tool is intended to be used to terminate Panduit OptiCam connectors. The tool emits a laser beam, which, when used in conjunction with patch cord (sold separately), creates a glow effect from the connector which aids in proper connector termination.

Contact Panduit Corp. for a list of available replacement and additional parts for OptiCam connector products.

Complies with IEC 60825-1 Ed. 2 (2007). Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

**TECHNICAL SPECIFICATIONS:**

Recommended use: With available patch cords only

Laser Diode type: Laser Light.-CLASS 1M LASER PRODUCT

Power Supply: 2 type AAA - 1.5 volt Alkaline batteries

Battery Life: Approx. 15 hours of continuous use

Operating temperature: 0° C to 40° C


Overall Dimensions: 2.0" H x 1.8" W x 6.7" L  
(52mm H x 47mm W x 172mm L)  
All dimensions are for reference only.

Weight: 4.7 oz (133 g) without batteries

FILE LOCATION: TEAMCENTER

Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

COMPLIANCE LABEL

REV	DATE	BY	CHK'D	DESCRIPTION	ECN	- R	CUST	SUP	 <b>PANDUIT</b> CORP. TINLEY PARK, ILLINOIS <b>OCTT*OptiCam Termination Tool</b> <b>Customer Drawing</b>				
03	3-19-15	BLR	LWA	UPD COMPLIANCE TEXT & LABELS	4804	--	DLWE		UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± — (.xxx) ± — (.xx) ± — ANGLES ± —			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
02	8-04-11	BLR	MABH	UPD TOP VIEW GRAPHIC	4413	--	ABJ		DRAWN BY: BLR				SCALE NONE
01	4-14-05	BLR	ABJ	UPDATE BOTH LABELS	4152	--	DLWE		DATE: 3-31-05			DRAWING NO. FG24922B01	DWG B SIZE
00	3-31-05	BLR	ABJ	RELEASED	4152	--	DLWE		CHK'D: ABJ				