



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



OD8038-12HBXE10A



DC Fan, 12VDC
80x38mm (3.15"x 1.5")

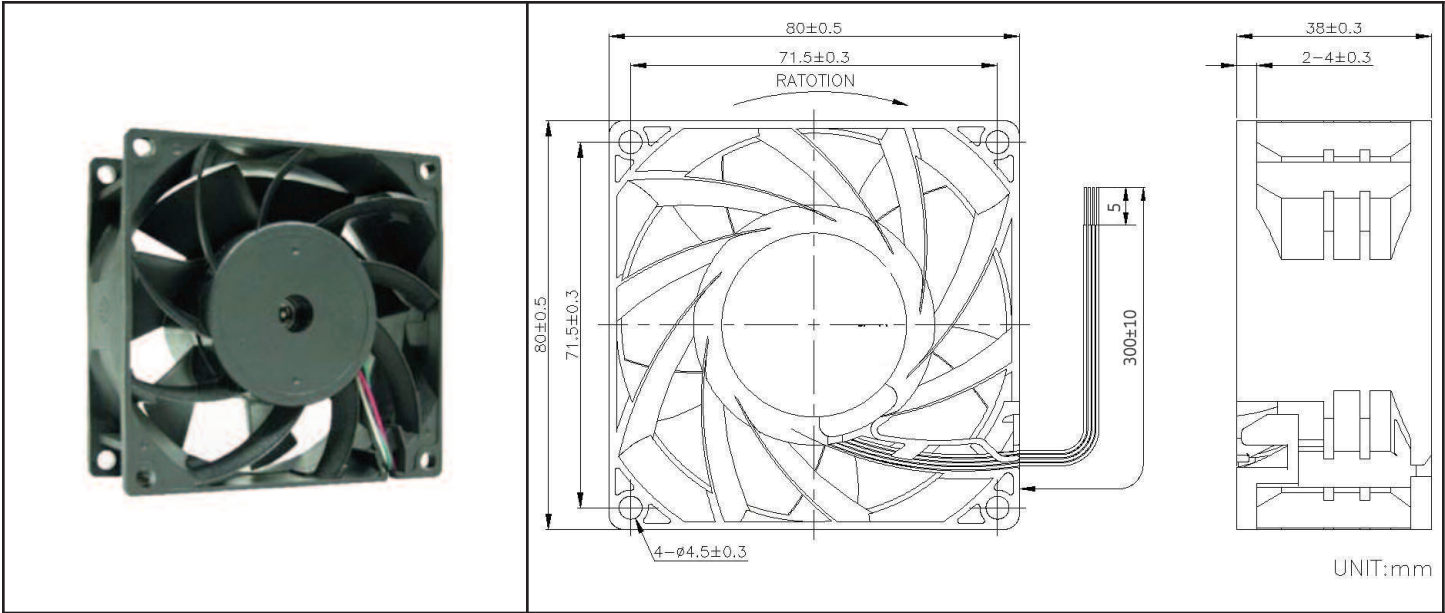


Frame & Impeller	PBT, UL94V-O plastic	<u>Available Options</u> ThermalControl * Connection: Wire Leads - UL1430, 24AWG Red(+), Black (-), White (tach), Blue (PWM) Weight: 219 g	
Connection	4x Lead wires *		
Motor	Brushless DC, auto restart, polarity protected.		
Bearing System	Dual ball bearing		
Insulation Resistance	Min. 10M at 500VDC		
Dielectric Strength	1 minute at 500VAC max leakage 500 microamp		
Temperature Range	-10C ~ +70C		
Storage Temperature	-40C ~ +80C		
Life (L10)	70,000 hours (40C)		

Model Number	OD8038-12HBXE10A
Part Number	189181261
Nominal Voltage	12 VDC
Voltage Range	8~13.2 VDC
Rated Current	4.10 A
Rated Power	49 Watts
Rated Speed (RPM)	13500
Airflow (CFM)	141
Noise Level (dB)	71
Max. Static Pressure	3.9 "H ₂ O

OD8038-48HBXE10A



DC Fan, 48VDC
80x38mm (3.15"x 1.5")

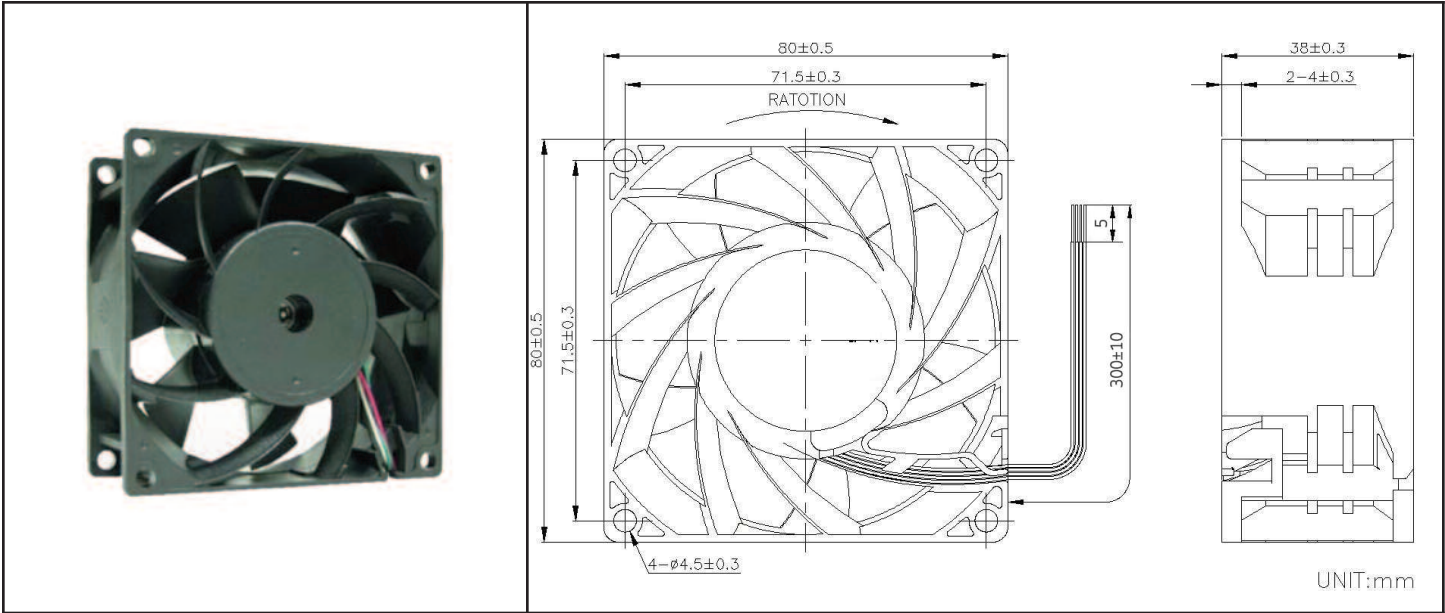

Frame & Impeller	PBT, UL94V-O plastic	<u>Available Options</u> ThermalControl * Connection: Wire Leads - UL1430, 24AWG Red(+), Black (-), White (tach), Blue (PWM) Weight: 219 g	
Connection	4x Lead wires *		
Motor	Brushless DC, auto restart, polarity protected.		
Bearing System	Dual ball bearing		
Insulation Resistance	Min. 10M at 500VDC		
Dielectric Strength	1 minute at 500VAC max leakage 500 microamp		
Temperature Range	-10C ~ +70C		
Storage Temperature	-40C ~ +80C		
Life (L10)	70,000 hours (40C)		

Model Number	OD8038-48HBXE10A
Part Number	189481261
Nominal Voltage	48 VDC
Voltage Range	28 ~56 VDC
Rated Current	1.14 A
Rated Power	55 Watts
Rated Speed (RPM)	13500
Airflow (CFM)	141
Noise Level (dB)	71
Max. Static Pressure	3.9 "H ₂ O