imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PHOTODIODE 15mm²

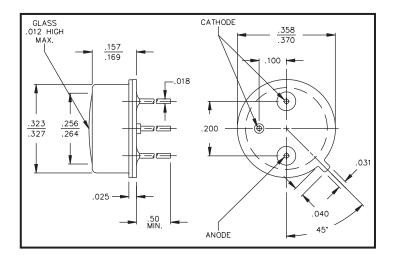

FEATURES

- TO-5 hermetic package
- · Optimized die size for maximum signal
- Low capacitance



ELECTRO-OPTICAL CHARACTERISTICS AT 25°C

PARAMETERS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Active Area	6.27mm x 2.52mm		15.8		mm ²
Responsivity, <i>R</i>	@ 632nm	0.35	0.40		A/W
Dark Current, Idr	V _R = 10V		4	10	nA
Reverse Breakdown Voltage, V _R	I _R = 10A	25	60		Volts
Capacitance, C	V _R = 10V		30		pF
Rise Time	V _R = 10V		20		nsec
Series Resistance	$V_f = 1 V$		35	100	Ohms


THERMAL PARAMETERS

Storage and Operating Temperature Range	-55°C TO 100°C	
Maximum Junction Temperature	100°C	
Lead Soldering Temperature ¹	260°	

¹1/16" from case for 10 seconds.



PHOTODIODE 15mm²

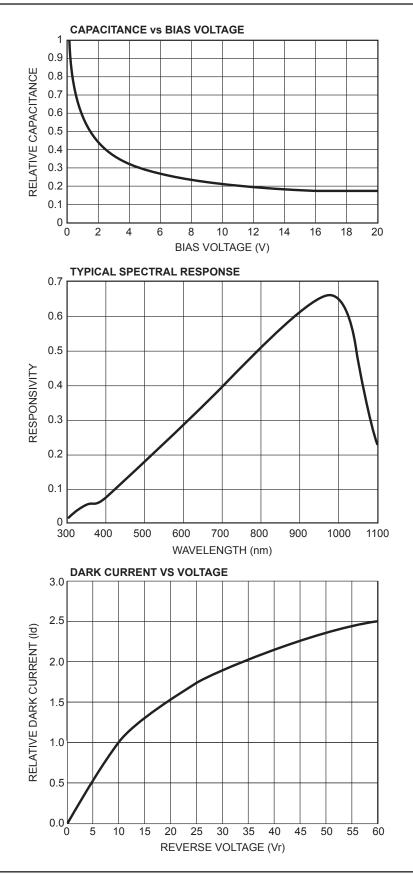



750 Mitchell Road, Newbury Park, California 91320 Phone: (805) 499-0335, Fax: (805) 499-8108 Email: sales@optodiode.com, Website: www.optodiode.com

Revision February 26, 2013