



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



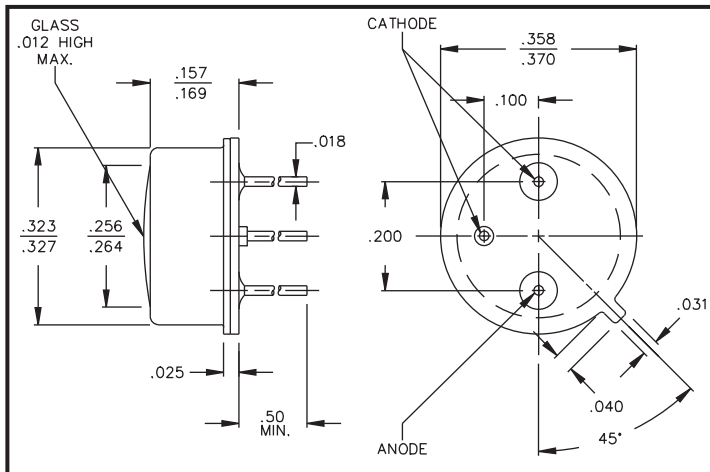

**FEATURES**

- TO-5 hermetic package
- Optimized die size for maximum signal
- Low capacitance



**ELECTRO-OPTICAL CHARACTERISTICS AT 25°C**

PARAMETERS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Active Area	6.27mm x 2.52mm		15.8		mm <sup>2</sup>
Responsivity, $\mathcal{R}$	@ 450nm	0.20	0.28		A/W
Dark Current, $I_{dr}$	$V_R = 10V$		4	10	nA
Reverse Breakdown Voltage, $V_R$	$I_R = 10A$	25	60		Volts
Capacitance, C	$V_R = 10V$		30		pF
Rise Time	$V_R = 10V$		20		nsec
Series Resistance	$V_f = 1V$		35	100	Ohms

**THERMAL PARAMETERS**

Storage and Operating Temperature Range	-55°C TO 100°C
Maximum Junction Temperature	100°C
Lead Soldering Temperature <sup>1</sup>	260°

<sup>1</sup>1/16" from case for 10 seconds.



750 Mitchell Road, Newbury Park, California 91320  
 Phone: (805) 499-0335, Fax: (805) 499-8108  
 Email: sales@optodiode.com, Website: www.optodiode.com

