



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



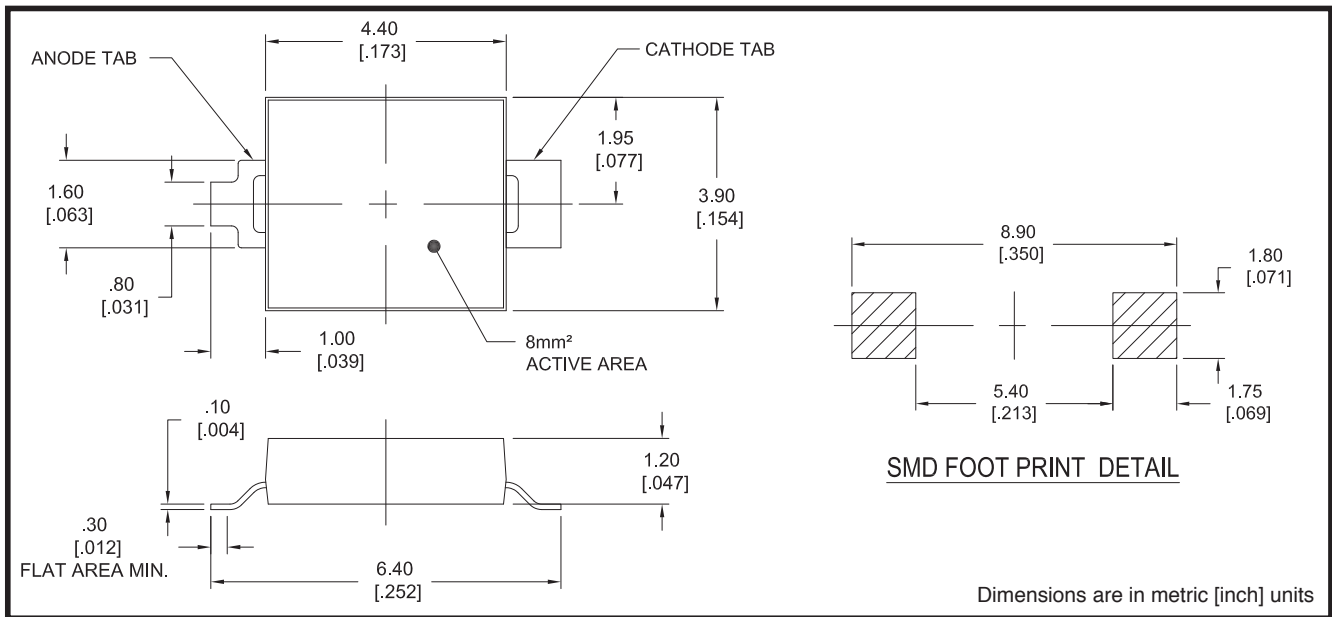

FEATURES

- High sensitivity
- Short switching time
- Low capacitance
- Surface mount package




ELECTRO-OPTICAL CHARACTERISTICS AT 25°C

| PARAMETERS | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|--|---|-----|-------|------|-------|
| Range of Spectral Bandwidth, $\lambda_{0.5}$ | - | 400 | - | 1100 | nm |
| Wavelength of Peak Sensitivity, λ_p | - | - | 940 | - | nm |
| Responsivity | $\lambda_p = 940\text{nm}$ | - | 0.44 | - | A/W |
| Reverse Dark Current, I_p | $V_R = 10\text{V}$ | - | 5 | - | nA |
| Reverse Breakdown Voltage, B_{VR} | $I_R = 100\mu\text{A}$ | 32 | 170 | - | Volts |
| Total Capacitance, C_t | $V_R = 3\text{V}, f = 1\text{MHz}$ | - | 25 | - | pF |
| Rise/Fall Time, t_r/t_f | $V_R = 10\text{V}, R_L = 1\text{K}\Omega$ | - | 50/50 | - | nSec |

THERMAL PARAMETERS


| | |
|--|----------------|
| Operating Temperature Range | -25°C TO +85°C |
| Storage Temperature Range | -40°C TO +85°C |
| Power Dissipation at (or below) 25°C Free Air Temperature | 150mW |
| Soldering Temperature ¹ (Soldering time 5 sec max.) | 260°C |



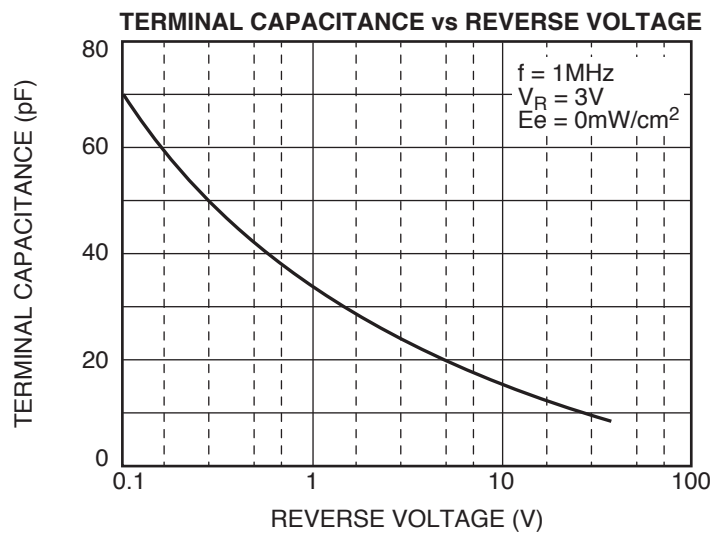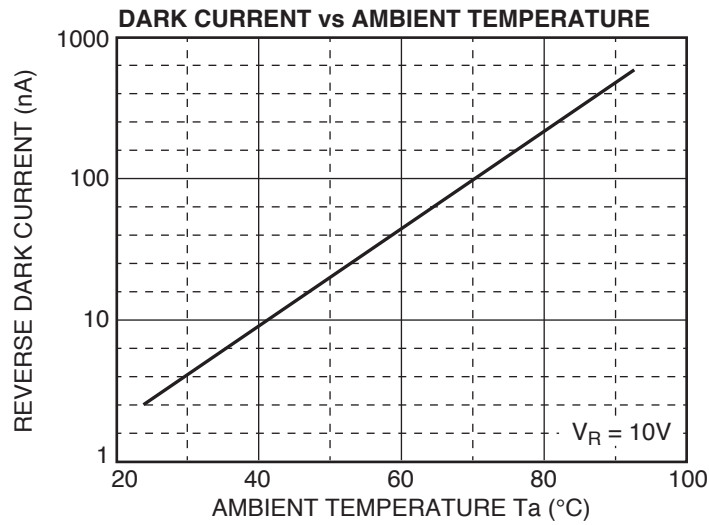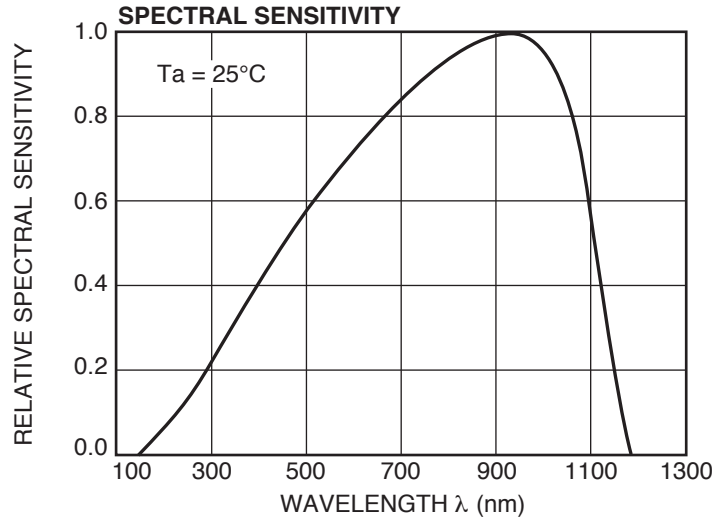

¹ Soldering Conditions

1.0 Pb-free solder temperature profile

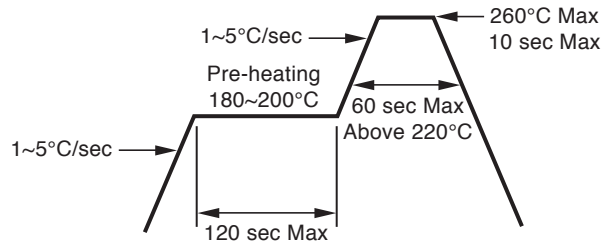

1.1 Reflow soldering should not be done more than twice

1.2 Do not stress the PD while soldering


1.3 Don't flex the circuit board after soldering

2.0 Soldering Iron


2.1 Each terminal should touch the tip of soldering iron (at 280°C) for less than for three seconds. Use a minimum two second interval between soldering each terminal. Use caution as product damage is often started during hand soldering.

2.2 The tip of soldering iron (at 280°) should be in contact with each terminal for less than three seconds. Pause for a minimum two second interval between soldering each terminal. Use caution as damage to the PD is often started during hand soldering.

Package Dimensions

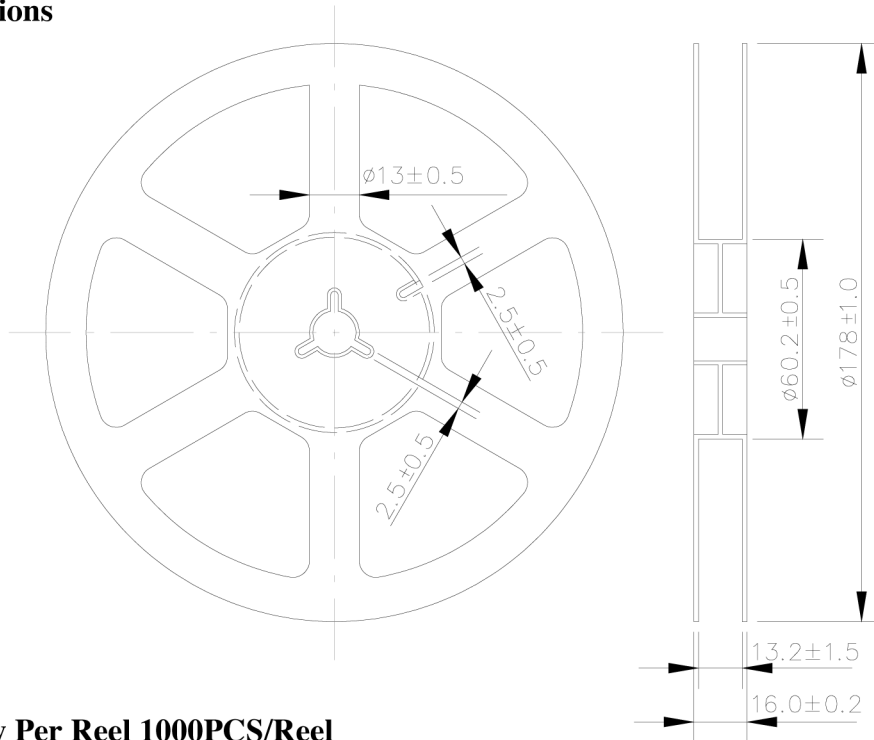

Loaded Quantity Per Reel 1000PCS/Reel

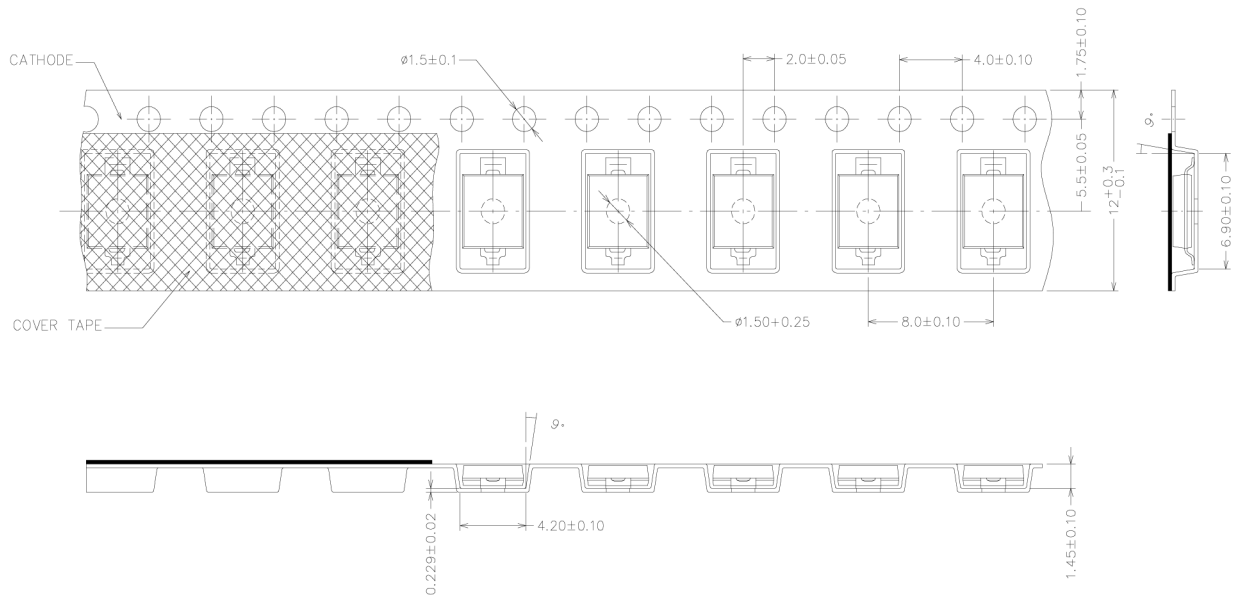

Unit :mm