



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# PN Silicon Photodiode

OP900SL



## Features:

- Narrow receiving angle
- Enhanced temperature range
- Ideal for direct mounting to PCBoard
- Fast switching speed
- Linear response vs.irradiance
- Mechanically and spectrally matched to OP123 emitters

## Description:

Each **OP900SL** consists of a PN junction silicon photodiode mounted in a miniature glass-lensed hermetically sealed “pill” package. The lensing effect allows an acceptance half-angle of 18°, when measured from the optical axis to the half-power point.


*The OP900SL is mechanically and spectrally matched to the OP123 series emitters.*

Please refer to Application Bulletins 208 and 210 for additional design information and reliability (degradation) data, and to Application Bulletin 202 for pill-type soldering to PCBoard.

## Applications:

- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Machine safety
- End of travel sensor
- Door sensor

Ordering Information		
Part Number	Sensor	Viewing Angle
OP900SL	Photodiode	35°

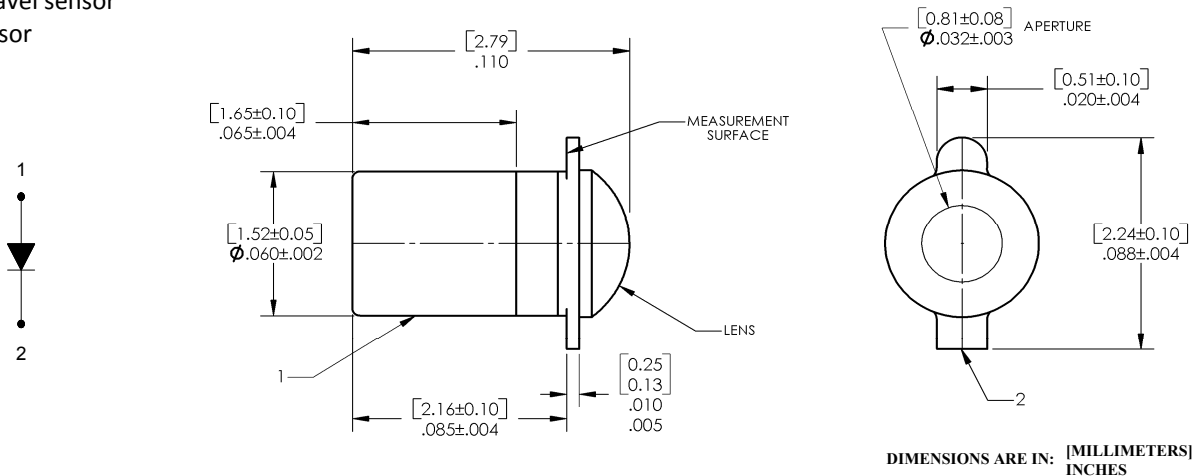

Pin #	Sensor
1	Collector / Cathode
2	Emitter / Anode



RoHS

General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com

### Electrical Specifications

Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)	
Reverse Voltage	100 V
Operating Temperature Range	$-65^\circ\text{C}$ to $+150^\circ\text{C}$
Storage Temperature Range	$-65^\circ\text{C}$ to $+125^\circ\text{C}$
Lead Soldering Temperature [1/16 inch (1.6 mm) from the case for 5 seconds with soldering iron]	$260^\circ\text{C}^{(1)}$
Power Dissipation	$50\text{ mW}^{(2)}$

Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
$I_L$	Light Current	8	14	-	$\mu\text{A}$	$V_R = 10\text{ V}$ , $E_E = 20\text{ mW/cm}^2$ <sup>(3)(4)</sup>
$I_D$	Dark Current	-	-	10	nA	$V_R = 10\text{ V}$ , $E_E = 0$ <sup>(3)</sup>
$V_{(BR)R}$	Reverse Voltage Breakdown	100	150	-	V	$I_R = 100\ \mu\text{A}$
$t_r$	Rise Time	-	100	-	ns	$V_R = 50\text{ V}$ , $I_L = 8\ \mu\text{A}$ , $R_L = 1\text{ k}\Omega$ (see test circuit)
$t_f$	Fall Time	-	100	-		

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) Derate linearly  $0.5\text{ mW}/^\circ\text{C}$  above  $25^\circ\text{C}$ .
- (3) Junction temperature maintained at  $25^\circ\text{C}$ .
- (4) Light source is an unfiltered tungsten bulb operating at  $CT = 2870\text{ K}$  or equivalent infrared source..

# PN Silicon Photodiode


OP900SL




## Performance

OP900SL


Typical Spectral Response

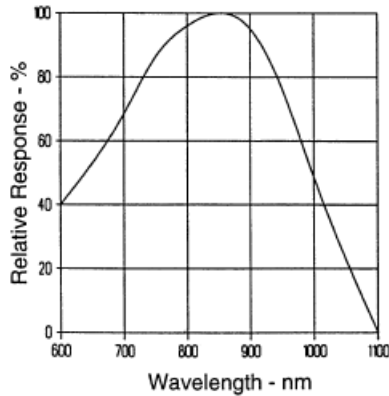


Coupling Characteristics of OP123 and OP900SL

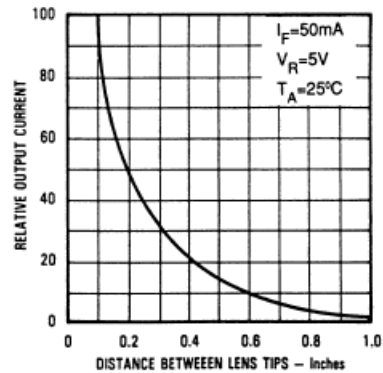


Dark Current vs. Ambient Temperature

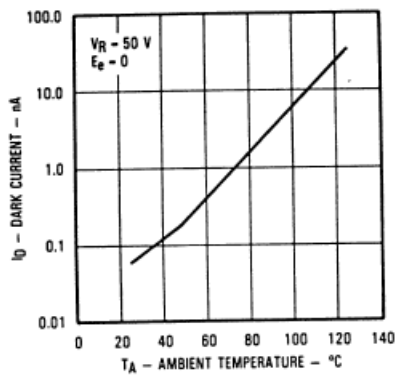


Normalized Light Current vs. Ambient Temperature

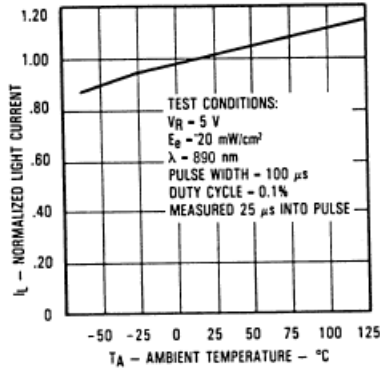


Total Capacitance vs. Reverse Voltage

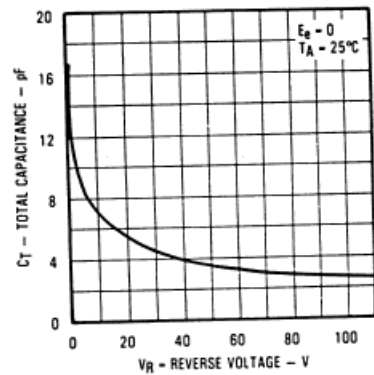


Light Current vs. Irradiance

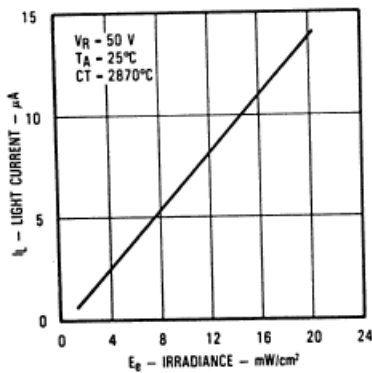

Switching Time Test Circuit



Light Current vs. Angular Displacement

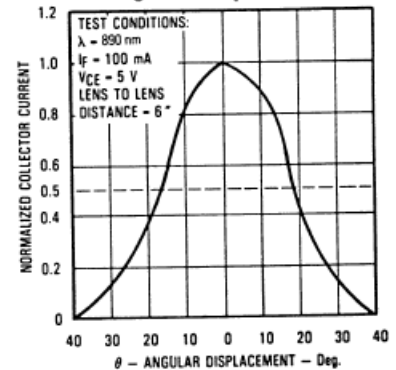

General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTeK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com