



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Photologic® Slotted Optical Switch

OPB460, OPB470, OPB480, OPB490 Series



Features:

- Choice of pins or wires mounting configuration
- Choice of aperture
- Choice of output configuration
- Choice of opaque or IR transmissive shell material
- Data rates to 250 kBaud
- Low power consumption

Description:

The **OPB460, OPB470, OPB480** and **OPB490** series of Photologic® photo integrated circuit switches provide optimum flexibility for the design engineer. Building from a standard housing with a 0.125" (3.180 mm) wide slot, a user can specify the type and polarity of TTL output, discrete shell material, aperture width and choice of mounting configurations. **OPB460** through **OPB473** have 0.425" (10.795 mm) PCBoard leads with 0.320" (8.1 mm) spacing. **OPB480** through **OPB493** have 24" (609 mm) 26 AWG wires (UL approved wires).


All devices in this series exhibit performance over supply voltages ranging from 4.5 V to 16.0 V, and may be specified as buffered or inverted with 10 kW Pull-up or Open Collector output. Devices are also TTI/LSTTL compatible and can drive up to 10 TTL loads.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:

- Mechanical switch replacement
- Speed indication (tachometer)
- Mechanical limit indication
- Edge sensing

Part Number Guide — OPB460, OPB470, OPB480, OPB490 Series

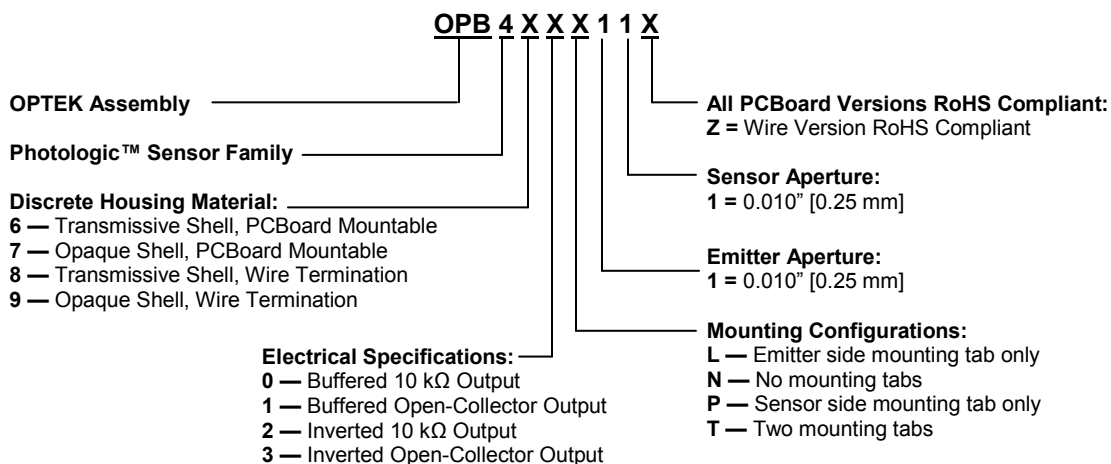


General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch



OPB460, OPB470, OPB480, OPB490 Series

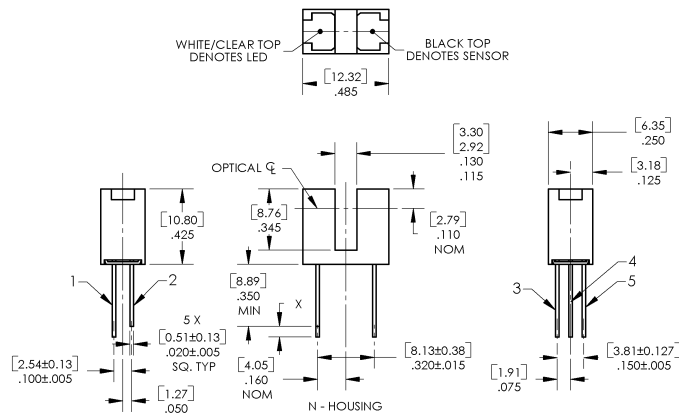

| Color-Pin | Description |
|-----------|-------------|
| Red-1 | Anode |
| Black-2 | Cathode |
| White-3 | Vcc |
| Blue-4 | Output |
| Green-5 | Ground |

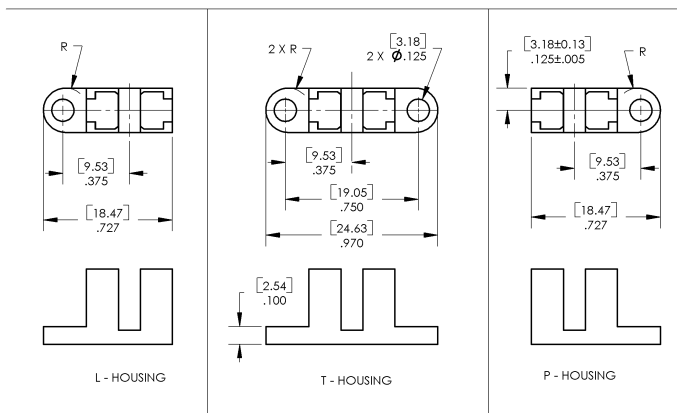

TOLERANCE DIMENSIONS ARE: ± .25mm [± .010"]

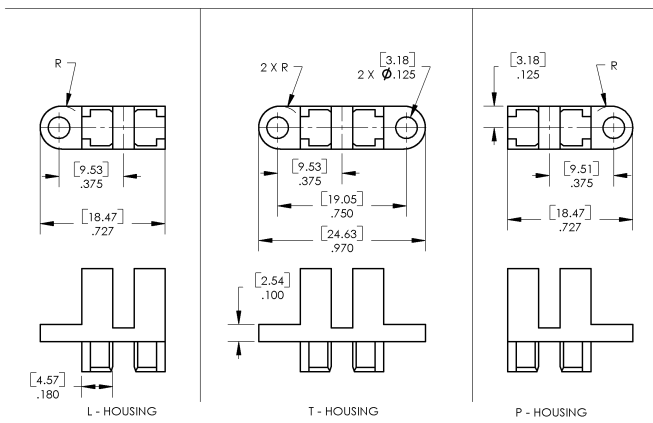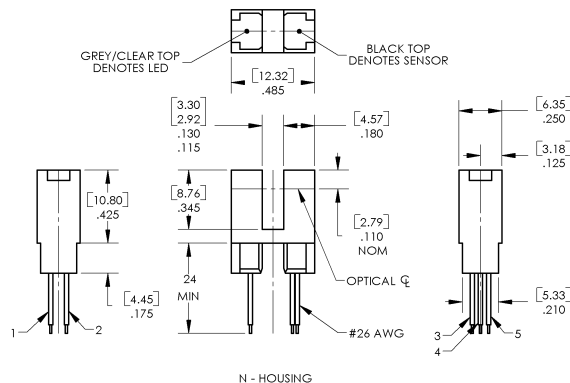

CONTAINS POLYSULFONE
 To avoid stress cracking, we suggest using ND Industries' **Vibra-Tite** for thread-locking. **Vibra-Tite** evaporates fast without causing structural failure in OPTEK's molded plastics.
Applies to: OPB460, OPB470, OPB480, OPB490.

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
 1645 Wallace Drive, Carrollton, TX 75006
 Ph: +1 972 323 2200
 www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch



OPB460, OPB470, OPB480, OPB490 Series

| Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted) | |
|--|------------------|
| Storage & Operating Temperature Range | -40° C to +85° C |
| Lead Soldering Temperature [1/16 inch (1.6mm) from the case for 5 sec. with soldering iron] ⁽¹⁾ | 260°C |
| Input Infrared LED | |
| Supply Voltage, V_{CC} (not to exceed 3 seconds) | 18 V |
| Diode Forward DC Current | 40 mA |
| Diode Reverse DC Voltage | 2 V |
| Input Diode Power Dissipation ⁽²⁾ | 75 mW |
| Output Photologic® | |
| Voltage at Output Lead (Open Collector Output) | 25 V |
| Output Photologic® Power Dissipation ⁽³⁾ | 200 mW |
| | |
| Total Device Power Dissipation ⁽⁴⁾ | 275 mW |

Notes:


- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) Derate linearly 1.67 mW/°C above 25° C (OPB460, OPB470) or derate linearly 1.82 mW/°C above 25° C (OPB480, OPB490).
- (3) Derate linearly 1.50 mW/°C above 25° C (OPB460, OPB470) or derate linearly 1.64 mW/°C above 25° C (OPB480, OPB490).
- (4) Derate linearly 3.17 mW/°C above 25° C (OPB460, OPB470) or derate linearly 3.45 mW/°C above 25° C (OPB480, OPB490).
- (5) The OPB460/OPB470 series are terminated with 0.020" square leads designed for printed circuit board mounting.
- (6) The OPB480/OPB490 series of switches are terminated with 24" (609.600 mm) of 7-strand 26 AWG, UL rated insulated wire on each terminal. Insulation colors and functions are: red (anode), black (cathode), white (V_{CC}), blue (output) and green (ground). Other wire lengths and/or colors in addition to customer selected connectors are available. Contact your local representative or call the factory.

Photologic® Slotted Optical Switch




OPB460, OPB470, OPB480, OPB490 Series


OPB460/470/480/490 Buffered 10K Pull-Up

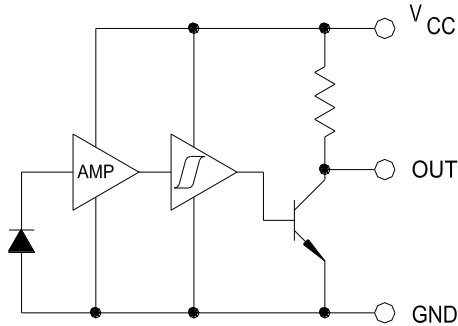


OPB461/471/481/491 Buffered Open-Collector

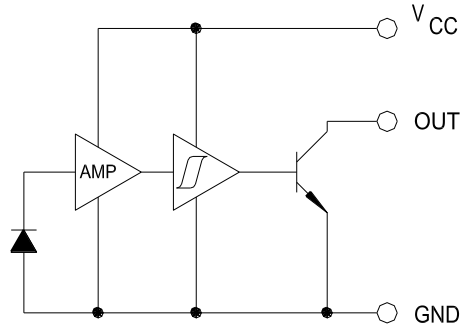

OPB462/472/482/492 Inverted 10K Pull-Up

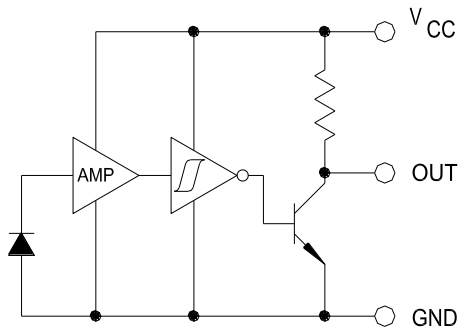

OPB463/473/483/493 Inverted Open-Collector

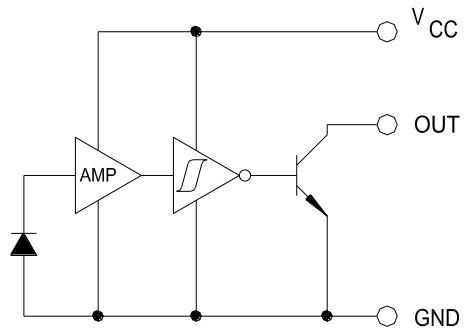

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch



OPB460, OPB470, OPB480, OPB490 Series

| Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | |
|---|---|----------------|-----|-----|---------------|---|
| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| Input Diode | | | | | | |
| V_F | Forward Voltage | - | - | 1.7 | V | $I_F = 20\text{ mA}$, $T_A = 25^\circ\text{C}$ |
| I_R | Reverse Current | - | - | 100 | μA | $V_R = 2\text{ V}$, $T_A = 25^\circ\text{C}$ |
| Output Photologic® Sensor | | | | | | |
| V_{CC} | Operating DC Supply Voltage | 4.5 | - | 16 | V | |
| I_{CCL} | Low Level Supply Current: Buffered with 10k pull-up ⁽¹⁾ Buffered Open-Collector Output | - | - | 7.5 | mA | $V_{CC} = 16\text{ V}$, $I_F = 0\text{ mA}$ ⁽¹⁾ |
| | Inverted with 10k pull-up: Inverted Open-Collector Output | - | - | 7.5 | mA | $V_{CC} = 16\text{ V}$, $I_F = 12\text{ mA}$ |
| I_{CCH} | High Level Supply Current: Buffered with 10k pull-up Buffered Open-Collector Output | - | - | 7.5 | mA | $V_{CC} = 16\text{ V}$, $I_F = 12\text{ mA}$ |
| | Inverted with 10k pull-up: Inverted Open-Collector Output | - | - | 7.5 | mA | $V_{CC} = 16\text{ V}$, $I_F = 0\text{ mA}$ ⁽¹⁾ |
| V_{OL} | Low Level Output Voltage: Buffered with 10k pull-up Buffered Open-Collector Output | - | - | 0.4 | V | $V_{CC} = 4.5\text{ V}$, $I_{OL} = 16\text{ mA}$, $I_F = 0\text{ mA}$ |
| | Inverted with 10k pull-up: Inverted Open-Collector Output | - | - | 0.4 | V | $V_{CC} = 4.5\text{ V}$, $I_F = 12\text{ mA}$ ⁽¹⁾ |
| V_{OH} | High Level Output Voltage: Buffered with 10k pull-up | $V_{CC} - 1.5$ | - | - | V | $V_{CC} = 4.5\text{ V to } 16\text{ V}$, No Load, $I_F = 12\text{ mA}$ |
| | Inverted with 10k pull-up: Inverted Open-Collector Output ⁽¹⁾ | $V_{CC} - 1.5$ | - | - | V | $V_{CC} = 4.5\text{ V to } 16\text{ V}$, No Load, $I_F = 0\text{ mA}$ |
| I_{OH} | High Level Output Current: Buffered Open-Collector Output | - | - | 14 | μA | $V_{CC} = 16\text{ V}$, $I_F = 12\text{ mA}$, $V_{OH} = 25\text{ V}$, $T_A = 25^\circ\text{C}$ |
| | Inverted with 10k pull-up: Inverted Open-Collector Output ⁽¹⁾ | - | - | 14 | μA | $V_{CC} = 16\text{ V}$, $I_F = 0\text{ mA}$, $V_{OH} = 25\text{ V}$, $T_A = 25^\circ\text{C}$ |
| $I_{F(+)}$ | LED Positive-Going Threshold Current | - | - | 10 | mA | $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$ |
| $I_{F(+)} / I_{F(-)}$ | Hysteresis | - | 1.4 | - | - | $V_{CC} = 5\text{ V}$ |
| t_r, t_f | Rise Time, Fall Time | - | 50 | - | ns | $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$, $I_F = 0$ or 12 mA |
| t_{PLH}, t_{PHL} | Propagation Delay | - | 3 | - | μs | $R_L = 300\ \Omega$ to 5 V , $C_L = 50\text{ pF}$ |

Notes:


- (1) Normal application would be with light source blocked, simulated by $I_F = 0\text{ mA}$.
- (2) All parameters tested using pulse technique.

Photologic® Slotted Optical Switch




OPB460, OPB470, OPB480, OPB490 Series



OPB480T55 - Flag Next to Emitter

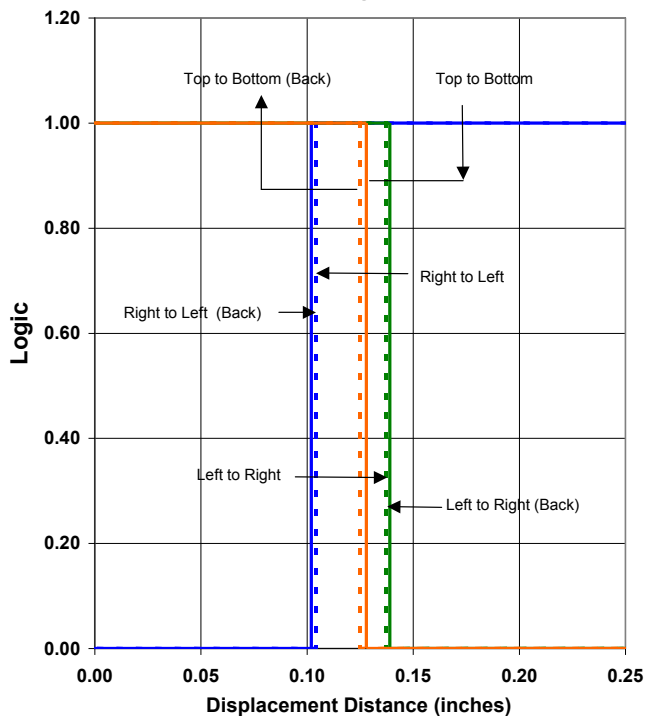

OPB480T55 - Flag Next to Sensor

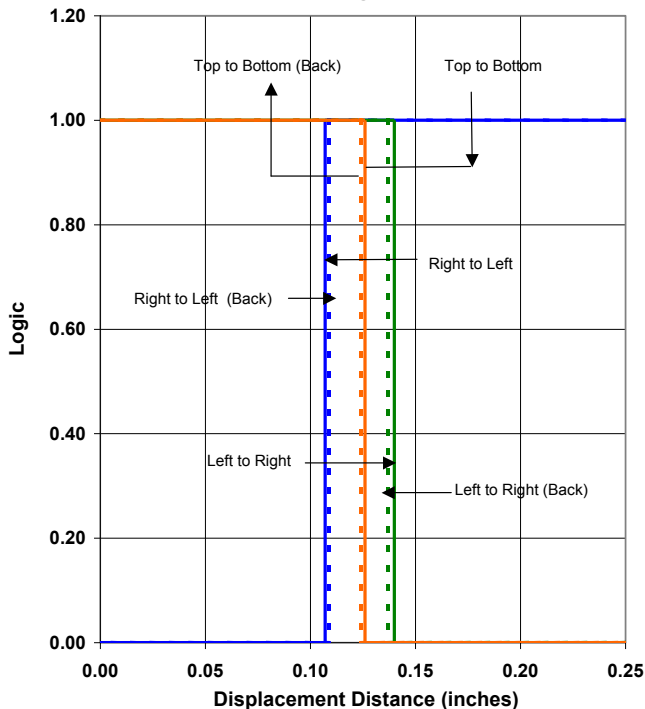

OPB480T55 - Flag in Middle of Slot

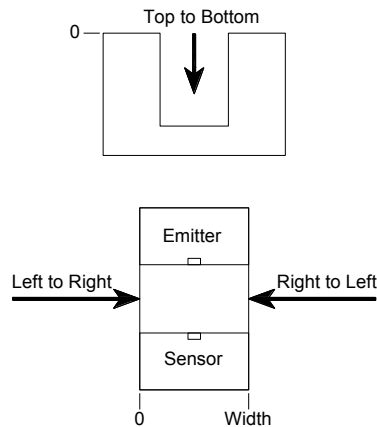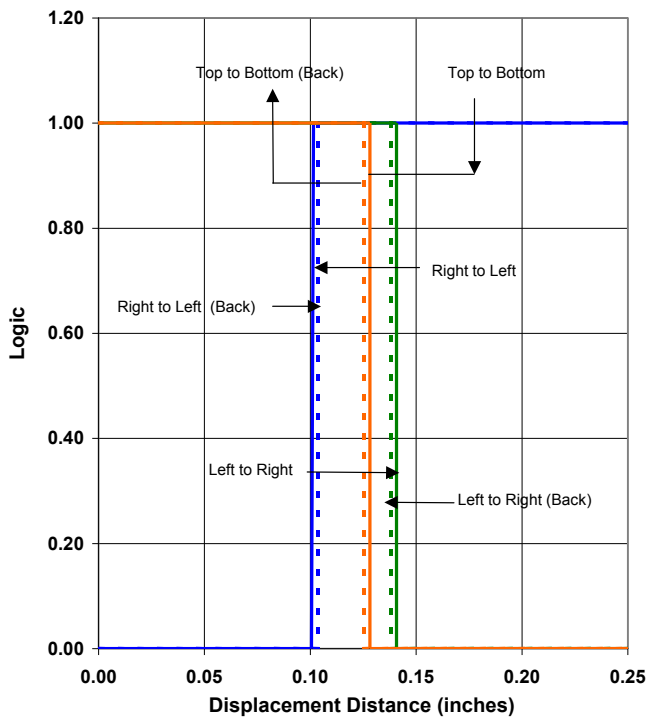

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch




OPB460, OPB470, OPB480, OPB490 Series



OPB481N51 - Flag Next to Emitter

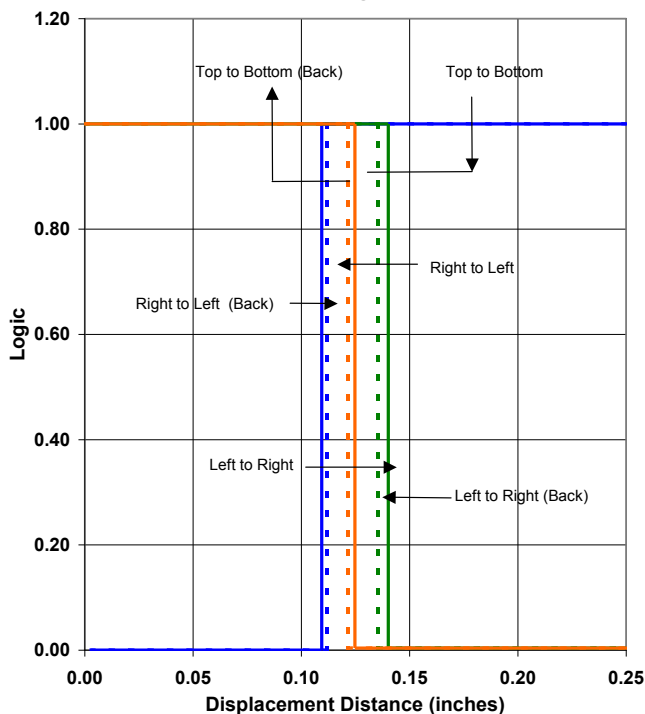

OPB481N51 - Flag Next to Sensor

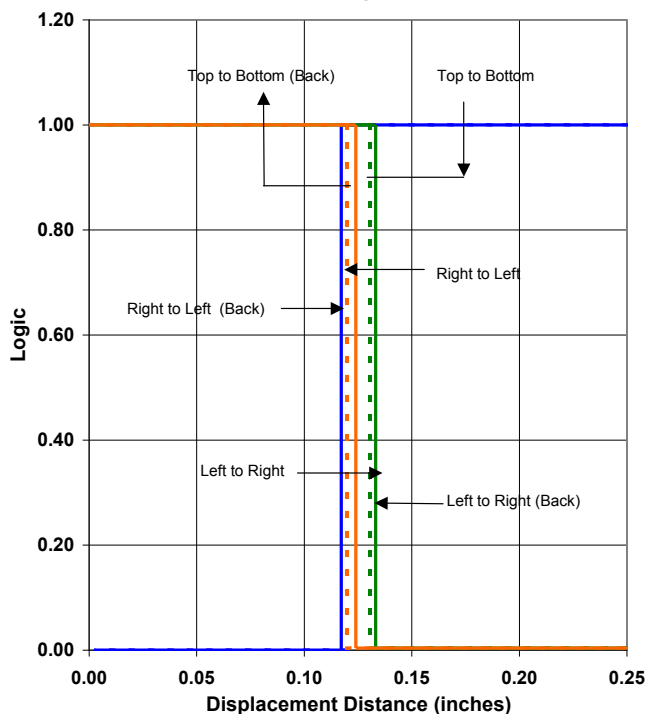

OPB481N51 - Flag in Middle of Slot

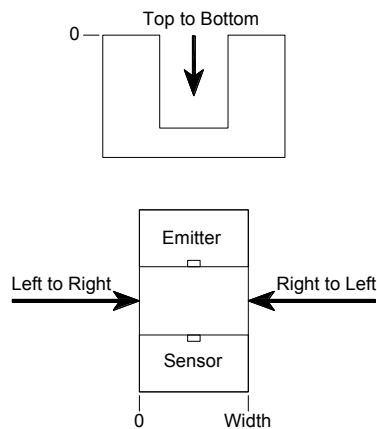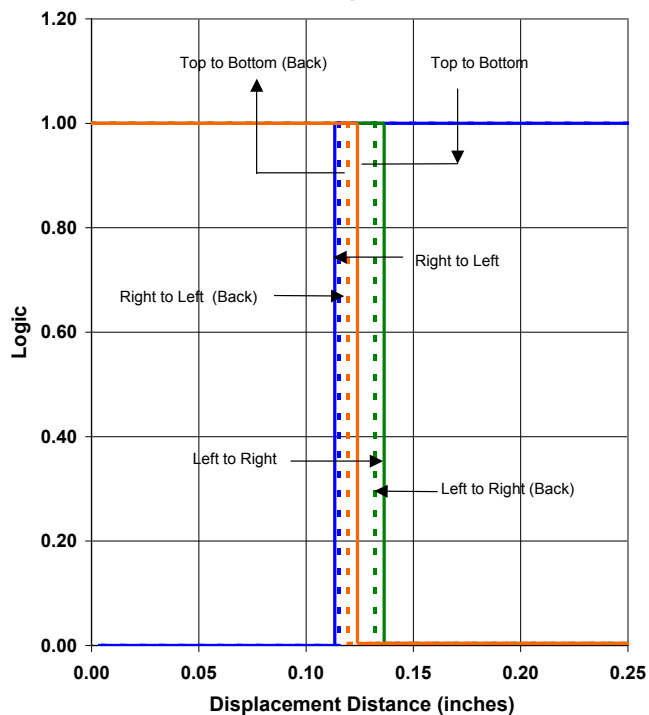

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch




OPB460, OPB470, OPB480, OPB490 Series




OPB460N11 - Flag Next to Emitter

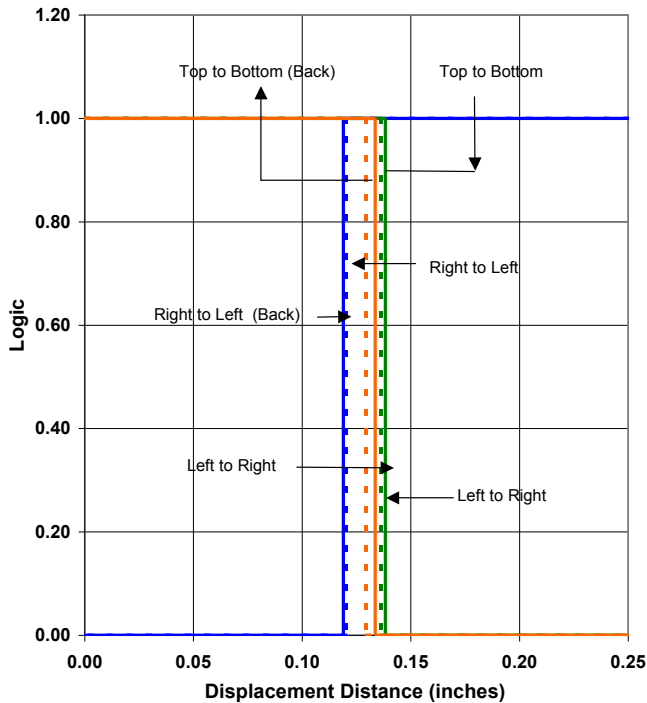

OPB460N11 - Flag Next to Sensor

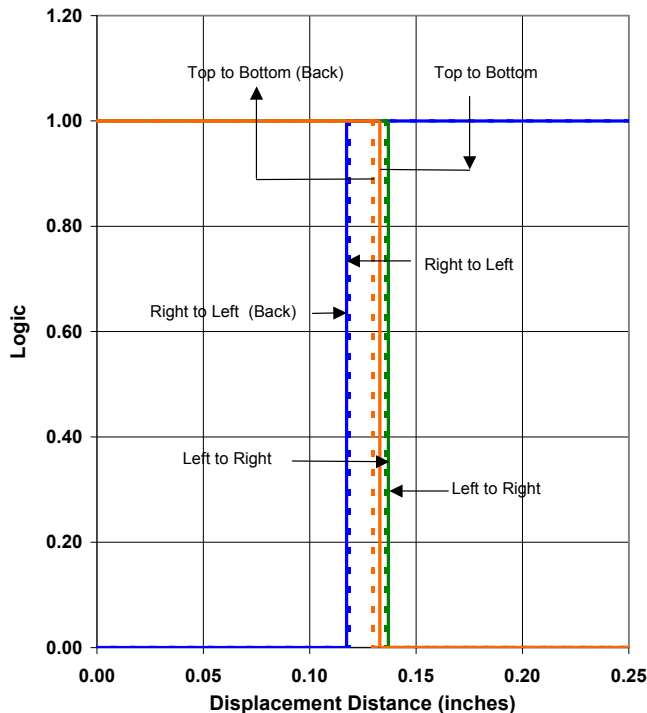

OPB460N11 - Flag in Middle of Slot

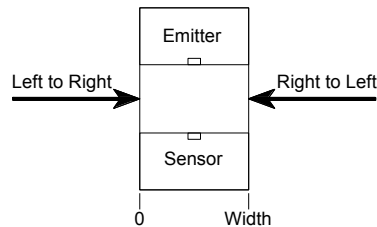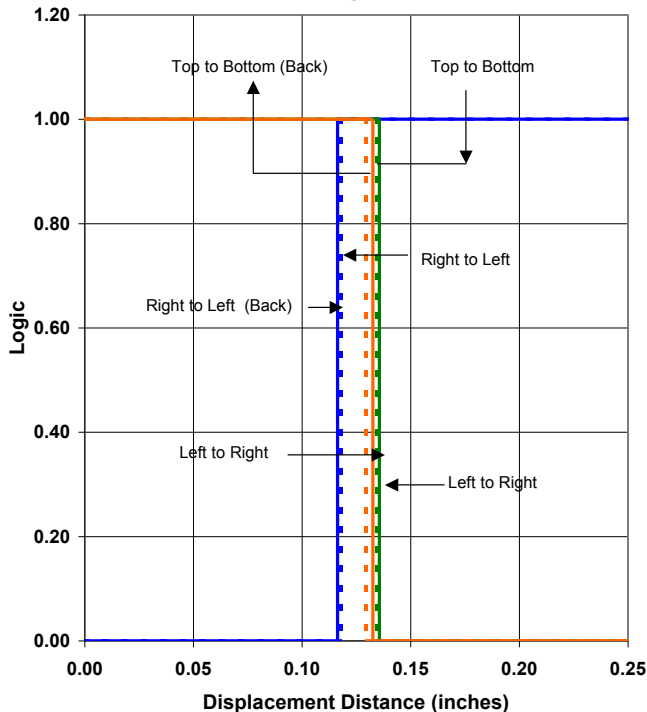

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com