



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Slotted Optical Switch

## OPB804



### Features:

- Non-contact switch
- PCB mount
- Wide aperture
- Opaque body to minimize sensitivity to ambient light

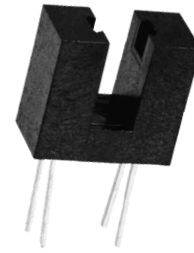


### Description:

OPB804 is a non-contact optical switch with a NPN silicon phototransistor and infrared Light Emitting Diode (LED) which are mounted on opposite sides of a 0.155" ( 3.94 mm) wide slot.

The device body is a single molded piece opaque plastic that reduces ambient light interference. A wide open aperture makes it versatile for general applications. LED emissions are near-infrared (850 – 940nm).

### Applications:

- Non-contact object sensing
- Assembly line automation
- Machine automation
- Equipment security
- Machine safety

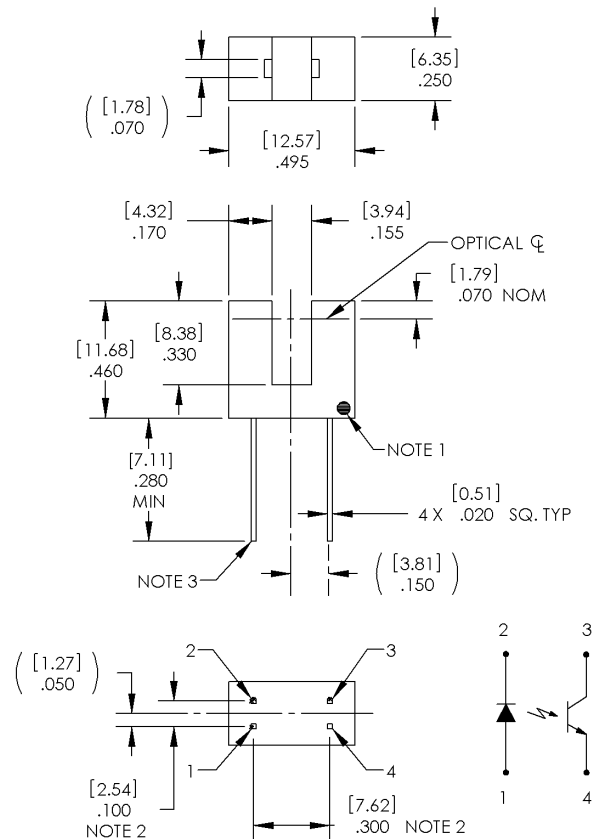

RoHS

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]  
TOLERANCES ARE ± .010" [0.25] UNLESS  
OTHERWISE STATED

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.  
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200  
www.ttelectronics.com | sensors@ttelectronics.com

### Electrical Specifications

#### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage Temperature Range	-40°C to +100°C
Operating Temperature Range	-40°C to +85°C
Lead Soldering Temperature	260°C <sup>(5)</sup>
<b>Input Diode</b>	
Input Diode Power Dissipation	75 mW <sup>(7)</sup>
Input Diode Forward D.C. Current, $T_A = 25^\circ\text{C}$	50 mA <sup>(7)</sup>
Input Diode Peak Forward Pulse Current, $T_A = 25^\circ\text{C}$ (1µs pulse width, 300pps)	1 A
<b>Phototransistor</b>	
Power Dissipation	100 mW <sup>(7)</sup>
Collector - Emitter Voltage	30V
Emitter - Collector Voltage	5.0V

#### Electrical Characteristics ( $T_A = 25^\circ\text{C}$ )

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

##### Input Diode (see OP140 or OP240 for additional information)

$V_F$	Forward Voltage	-	1.25	1.70	V	$I_F = 20\text{ mA}$
$I_R$	Reverse Current	-	-	-	-	Not designed for reverse operation

##### Output Phototransistor (see OP550 for additional information)

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	30	-	-	V	$I_C = 1\text{ mA}$ , $E_E = 0\text{ mw/cm}^2$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5.0	-	-	V	$I_E = 100\text{ }\mu\text{A}$ , $E_E = 0\text{ mw/cm}^2$
$I_{CEO}$	Collector Dark Current	-	-	100	nA	$V_{CE} = 10\text{ V}$ , $I_F = 0$ , $E_E = 0\text{ mw/cm}^2$

##### Coupled

$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	-	-	0.40	V	$I_C = 250\text{ }\mu\text{A}$ , $I_F = 20\text{ mA}$
$I_{C(ON)}$	On-State Collector Current	0.5	5	-	mA	$V_{CE} = 10\text{ V}$ , $I_F = 20\text{ mA}$

##### Notes:

- (1) Dot indicates # 3 collector lead side.
- (2) Feature controlled at body.
- (3) Cathode lead may be shorter.
- (4) RMA flux recommended. Highly activated water soluble fluxes may attack plastic. Recommend trial to verify application.
- (5) Maximum lead soldering temperature .060" [1.6mm] from case for 5 seconds with soldering iron.
- (6) Plastic is soluble in chlorinated hydrocarbons and ketones. Methanol or isopropanol are recommended as cleaning agents.
- (7) Derate linearly 1.67 mW/°C above 25° C.
- (8) All parameters tested using pulse techniques.
- (9) Do not connect input diode directly to a voltage source without an external current limiting resistor.
- (10) Do not apply reverse voltage to LED. LED will be a 0V in reverse voltage and draw current as if a short.

##### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.  
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200  
www.ttelectronics.com | sensors@ttelectronics.com


# Slotted Optical Switch

OPB804




## Performance



OPB804 - Flag Next to LED

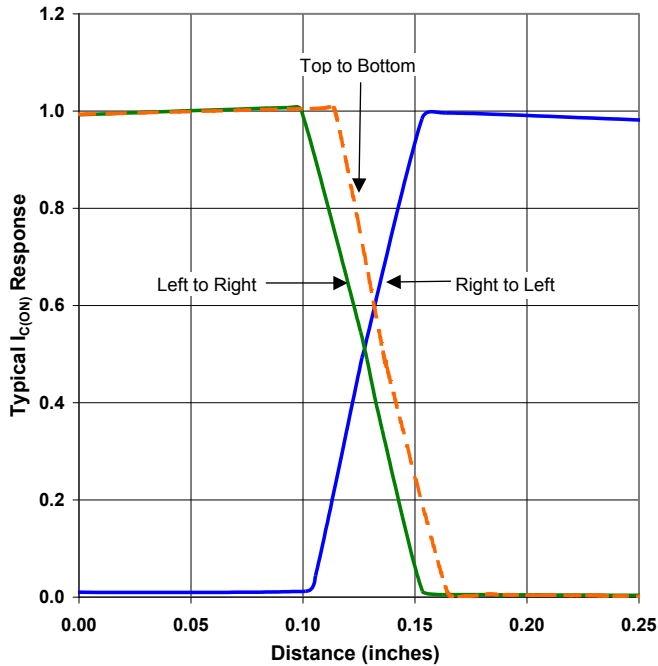

OPB804 - Flag Next to PTX

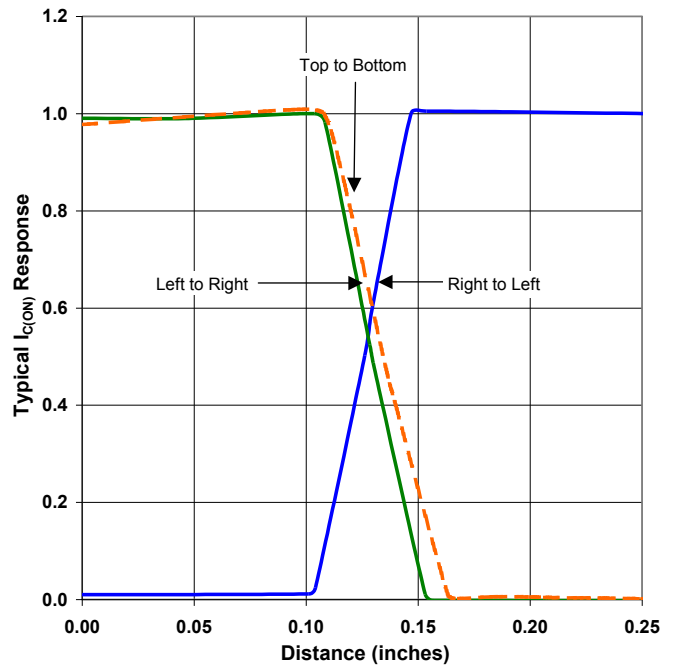

OPB804 - Flag in Middle of Slott

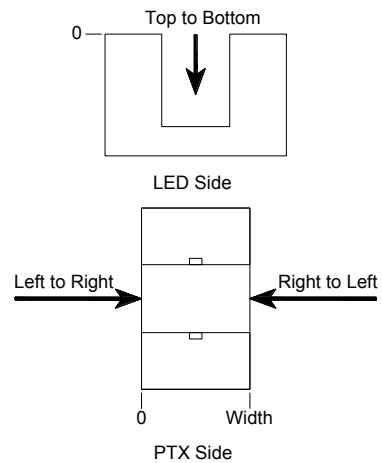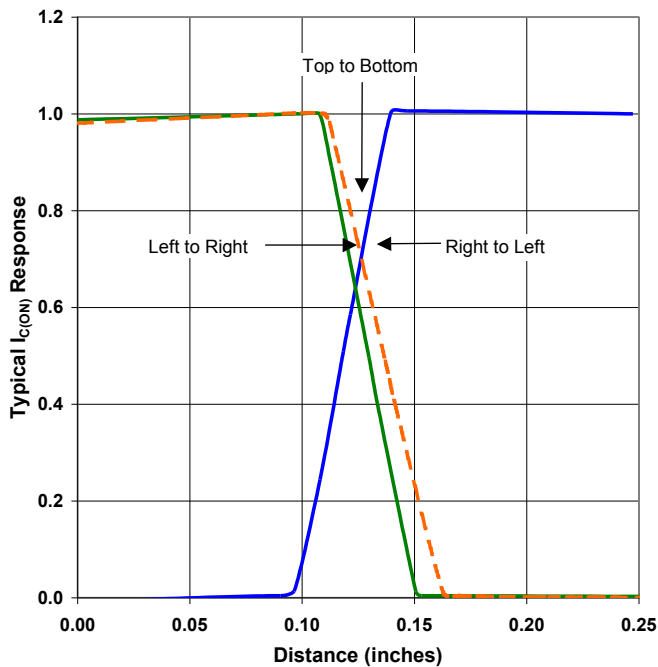

General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.  
 1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200  
[www.ttelectronics.com](http://www.ttelectronics.com) | [sensors@ttelectronics.com](mailto:sensors@ttelectronics.com)



