



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Infrared Light Emitting VCSEL

OPR2800V



Features:

- High speed VCSEL
- High output power
- Narrow beam angle
- Suitable for all types of high-speed data communications equipment
- Also available as diode (OPR2800, OPR2800T)



Description:

The OPR2800V is a high performance 850 nm invisible VCSEL (Class 1M) with a flat lens window. Its high speed, high output power and concentric beam pattern make it an ideal transmitter for all types of high-speed data equipment applications.

Please refer to Application Bulletins 221 and 224 for additional design information and reliability (degradation) data.


Refer to Application Bulletin 237

Applications:


- Fibre channel
- Gigabit Ethernet
- ATM
- VSR (Very Short Reach)
- Intra-system links
- Optical backplane interconnects

Ordering Information				
Part Number	LED Peak Wavelength	Total Beam Angle	Laser Class	Packaging
OPR2800V	850 nm	24°	Class 1M	Chip Tray

OPR2800V

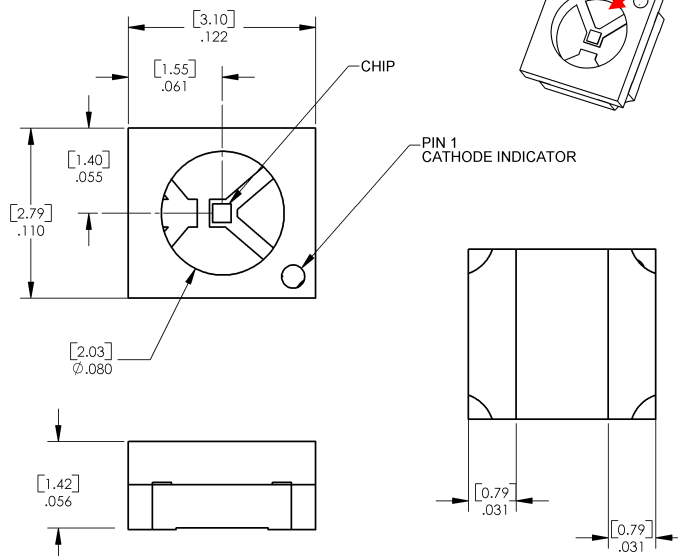

Warning: Front Window is pressure sensitive. Do not apply pressure or high vacuum to window.



Pin #	LED
1	Cathode
2	Anode



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Electrical Specifications

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage Temperature Range	-40°C to $+100^\circ\text{C}$
Operating Temperature Range	0°C to $+85^\circ\text{C}$
Maximum Forward Peak Current	20 mA
Maximum Reverse Voltage	10 V
Maximum Continuous Optical Power at 70°C	1.1 mW
Solder reflow time within 5°C of peak temperature is 20 to 40 seconds	$250^\circ\text{C}^{(1)}$

Notes:

1. Solder time less than 5 seconds at temperature extreme.

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
V_F	Forward Voltage	1.60	-	2.20	V	$I_F = 7\text{ mA}$
I_R	Reverse Current	-	-	35	μA	-
t_r, t_f	Output Rise Time, Output Fall Time	-	100	-	ps	20% to 80%
P_{OT}	Total Power Out	1.50	-	-	mW	$I_F = 7\text{ mA}$
I_{TH}	Threshold Current ⁽¹⁾	0.80	-	3	mA	
R_S	Series Resistance ⁽²⁾	20	-	55	ohms	
η	Slope Efficiency ⁽³⁾	0.28	-	-	mW/mA	
-	Linearity ⁽⁴⁾	0.00	-	-	-	
λ_P	Wavelength at Peak Emission	840	850	860	nm	-
$\Delta\lambda$	Optical Bandwidth	-	-	0.85	nm	-
θ	Beam Divergence	-	24	-	Degree	$I_F = 7\text{ mA}$
N_{RI}	Relative Intensity Noise	-	-123	-	db/Hz	-
$\Delta I_{TH}/\Delta T$	Temp Coefficient of Threshold Current	-	± 1.0	-	mA	$0^\circ - 70^\circ^{(1)}$
$\Delta\lambda/\Delta T$	Temp Coefficient of Wavelength	-	0.06	-	$\% / ^\circ\text{C}$	$0^\circ - 70^\circ, I_F = 7\text{ mA}$
$\Delta V_F/\Delta T$	Temperature Coefficient for V_F	-	-2.5	-	mW/ $^\circ\text{C}$	$0^\circ - 70^\circ, I_F = 7\text{ mA}$
$\Delta\eta/\Delta T$	Temperature Coefficient for Efficiency ⁽³⁾	-	-0.5	-	$\% / ^\circ\text{C}$	$0^\circ - 70^\circ$

Notes:

1. Threshold current is based on the two line intersection method specified in Telcordia GR468-Core. Line 1 from 4 mA to 6mA. Line 2 from 0 mA to 0.5 mA.
2. Series resistance is the slope of the voltage-current line from 5 to 8 mA.
3. Slope efficiency is the slope of the best-fit LI line from 5 mA to 8 mA, using no larger than 0.25 mA test interval points.
4. Using data points taken for slope efficiency above, $\Delta\lambda / \Delta I$ shall be calculated for each adjacent pair of points.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Performance

OP2800V - Normalized Output Power
vs Forward Current

