



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MODEL:
Switched PDU



MODEL NUMBER:
OSP-V-16-23-16-N1

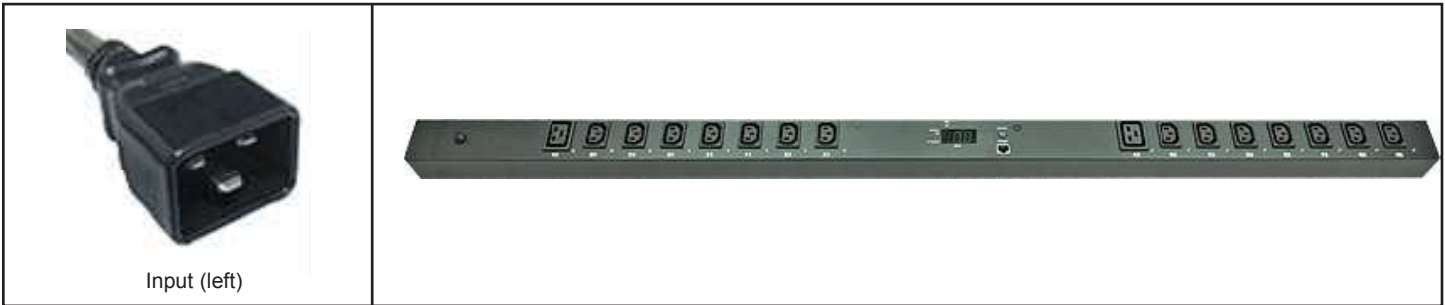

Input (left)

Features

Current Meter	Digital True RMS Current Meter
Power Monitor	Remote Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software
Protocols	http, https, SNMP, DHCP, UDP
Outlet Control	Individual Outlet Control
Power Delay	Power On/Off Sequence can be Defined
Alarm Thresholds	User-Defined Alarm Thresholds for Warning and Overload
Event Alert	Email, Trap, Audible Alarm

Specification:

General	Communication	Operation
Output: (14) IEC320 C13 (2) IEC320 C19 Input: (1) IEC320 C20 Inlet; Enclosed IEC320 C19 to C20 Power Cord 3 Meters long Protection (1) 16 Amp Circuit Breaker	SSL Indication (1) Yellow LED DHCP Indication (1) Green LED Output Status (16) Red LED Network (1) RJ45 for Ethernet Current Meter 3 Digits Seven Segments for True RMS Meter Range: 0A ~ 20A Resolution: 0.1A Precision: +/-2%+/-0.1 Amp	Nominal Voltage 230V Voltage 200V~ 240V full range Frequency 50/60HZ full range Max. Output Current 16 Amp (UL derated 12 Amp) Temperature 0 ~ 40 Celsius degree Humidity 0% ~ 90% Size 56 x 1245 x 44 mm Weight 4 kg

Regulatory Approvals:

UL 60950-1, UL Listed, CSA, cUL Listed, CB by UL
 CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
 C-Tick AS/NZS CISPR 22: 2006
 FCC Part 15 Class A, ICES-003