



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



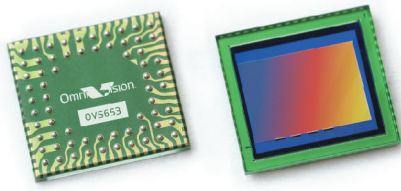

OV5653 5 megapixel product brief



available in
a lead-free
package

Best In Class Still Capture and 1080p Full HD Digital Video

Introducing the OV5653, OmniVision's latest 5 megapixel imaging solution for digital still camera (DSC) and digital video (DV) applications, featuring 1.75 μm OmniBSI™ (backside illumination) technology. OmniBSI technology delivers a number of performance improvements over front-side illumination (FSI) technology, including increased sensitivity per unit area, improved quantum efficiency, reduced crosstalk and photo response non-uniformity, which all lead to significant improvements in image quality.

The OV5653 delivers the industry's best low-light sensitivity of $>1300 \text{ mV}/(\text{lux}\cdot\text{sec})$ – a 40 percent improvement over previous FSI devices – and a 2x improvement in signal-to-noise ratio ($<70 \text{ lux}$). Ideal for both 5 megapixel DSC and DV applications, the OV5653 delivers 720p at 60 frames per second (fps) and full HD 1080p at 30 fps, resulting in vivid still and video images, even in the most challenging lighting conditions.

Although the OV5653 is a RAW sensor, it includes a variety of automatic image control functions such as automatic exposure control, automatic 50/60 Hz luminance detection, and auto black level calibration.

The OV5653 also includes programmable user controls for image quality, formatting and output data transfer, mirror and flip, cropping, windowing and panning. 256 bytes of embedded one-time programmable memory provide storage for custom information such as calibration parameters.

The OV5653 offers support for horizontal and vertical sub-sampling, and 2 x 2 binning. The embedded 1.5 volt regulator eliminates the need for additional power components.

The OV5653 – simply the best 5 megapixel solution in its class. Find out more at www.ovt.com.


Applications

- Digital Still Cameras (DSC)
- Security Cameras
- Digital Video Camcorders (DVC)

Product Features

- 1.75 μm OmniBSI™ technology for high performance (high sensitivity, low crosstalk, low noise)
- industry's best low light sensitivity
- 720p at 60 fps and full HD 1080p at 30 fps
- 256 bytes of embedded one-time programmable (OTP) memory
- support for horizontal and vertical sub-sampling and 2 x 2 binning
- image quality controls: lens shading correction, 2-D defective pixel canceling
- support for output formats: 8/10-bit RAW RGB data
- support for video or snapshot operations
- support for internal and external frame synchronization for frame exposure mode
- standard serial SCCB interface
- digital video port (DVP) parallel output interface
- MIPI interface (two lanes)
- on-chip phase lock loop (PLL)
- embedded 1.5 V regulator for core power
- programmable I/O drive capability, I/O tri-state configurability
- support for black sun cancellation
- programmable controls for frame rate, AEC/AGC 16-zone size/position/weight control, mirror and flip, cropping, windowing, and panning

OV5653




Ordering Information

- OV05653-A66A
(color, lead-free, 66-pin CSP3)

Product Specifications

- active array size: 2592 x 1944
- dynamic range: 69 dB
- power supply:
 - core: 1.5 V $\pm 5\%$ (with embedded 1.5 V regulator)
 - analog: 2.6 ~ 3.0 V (2.8 V typical)
 - I/O: 1.8 V/2.8 V
- maximum image transfer rate:
 - QSXGA (2592 x 1944): 15 fps
 - 1080p: 30 fps
 - 720p: 60 fps
 - VGA (640 x 480): 90 fps
 - QVGA (320 x 240): 120 fps
- temperature range:
 - operating: -30°C to 70°C
 - stable image: 0°C to 50°C
- sensitivity: >1300 mV/(lux-sec)
- shutter: rolling shutter
- output formats: 8/10-bit RAW RGB output
- pixel size: 1.75 μm x 1.75 μm
- image area: 4592 μm x 3423 μm
- lens size: 1/3.2"
- lens chief ray angle: 11.2° no n-linear
- package dimensions: 6505 μm x 6005 μm
- input clock frequency: 6 ~ 27 MHz

Functional Block Diagram

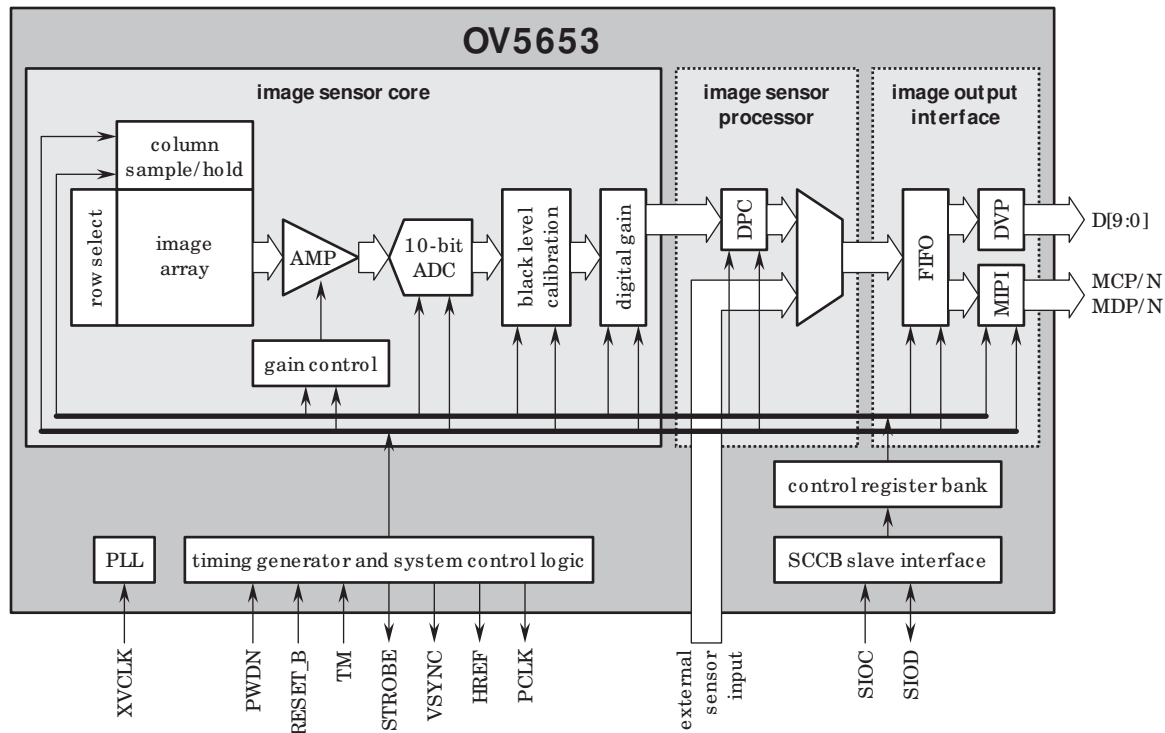

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: +1 408 567 3000
Fax: +1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision is a registered trademark of OmniVision Technologies, Inc. The OmniVision logo and OmniBSI are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

OmniVision