



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# OV9750 720p HD product brief



## High Performance 1/3-Inch Image Sensor Brings 720p HD Video to Mainstream Surveillance Camera Applications



available in a lead-free package

OmniVision's new OV9750 is a high performance 1/3-inch 720p high definition (HD) sensor designed specifically for mainstream consumer and commercial security systems. The sensor utilizes OmniVision's latest OmniPixel3-HS™ with dual conversion gain frontside illumination technology to capture high definition (HD) video used for popular analog 960H CCTVs, as well as HD analog and 720 HD network cameras. The OV9750 also has high near-infrared (NIR) sensitivity for day and night camera applications.

Built on 3.75-micron OmniPixel3-HS™ with dual conversion gain pixel architecture, the OV9750 achieves excellent image performance, enabling clear image and

video recording in both high- and low-light environments. The OV9750 is capable of operating in SXGA (1280x960) resolution at 60 frames per second (fps) with 10-bit output, or at 45 fps with 12-bit output.

Additionally, the sensor fits into a 6.3 x 5.2 mm package and supports ultra-low power mode (ULPM), which reduces resolution and frame rates to conserve additional power for very low-power camera design.

Find out more at [www.ovt.com](http://www.ovt.com).




## Applications

- Security and Surveillance Cameras
- PC Multimedia
- Wearables
- 960H for Analog CCTV Applications

## Product Features

- 3.75  $\mu\text{m}$  x 3.75  $\mu\text{m}$  pixel
- 1280x960 at 60 fps @ 10-bit, 45 fps @ 12-bit
- programmable controls for frame rate, mirror and flip, cropping, and windowing
- supports images sizes: SXGA (1280 x 960), VGA (640 x 480), and more
- 2k bits of embedded one-time programmable (OTP) memory
- ultra low power mode (ULPM)
- support for output formats: 10/12-bit RGB RAW
- two-wire serial bus control (SCCB)
- MIPI/LVDS serial output interface (1- or 2-lane)/DVP interface
- 2x binning support
- image quality control: defect pixel correction and automatic black level calibration

# OV9750




## Ordering Information

- OV09750-H55A (color, lead-free, 55-pin CSP5)

## Product Specifications

- active array size: 1280 x 960
- power supply:
  - core: 1.7 to 1.9V (1.8V nominal)
  - analog: 3.15 to 3.45V (3.3V nominal)
  - I/O: 1.7 to 1.9V (1.8V nominal)
- power requirements:
  - active: 166 mW
  - standby: 51  $\mu\text{W}$
  - XSHUTDN: 13  $\mu\text{W}$
- temperature range:
  - operating: -30°C to +85°C junction temperature
  - stable image: 0°C to +60°C junction temperature
- output interface: 2-lane MIPI/LVDS serial output/DVP parallel output
- output formats: 10/12-bit RGB RAW
- lens size: 1/3"
- lens chief ray angle: 9° linear
- input clock frequency: 6 - 74.5 MHz
- maximum image transfer rate:
  - SXGA (1280x960): 60 fps
  - VGA (640x480): 120 fps
- sensitivity: 3600 mV/lux-sec
- max S/N ratio: 43.1 dB
- dynamic range: 73.4 dB @ 8x gain
- pixel size: 3.75  $\mu\text{m}$  x 3.75  $\mu\text{m}$
- dark current:
  - HCG: 13.8 mV/s @ 60°C junction temperature
  - LCG: 4.5 mV/s @ 60°C junction temperature
- image area: 4860  $\mu\text{m}$  x 3660  $\mu\text{m}$
- die dimensions: 6254  $\mu\text{m}$  x 5194  $\mu\text{m}$

## Functional Block Diagram

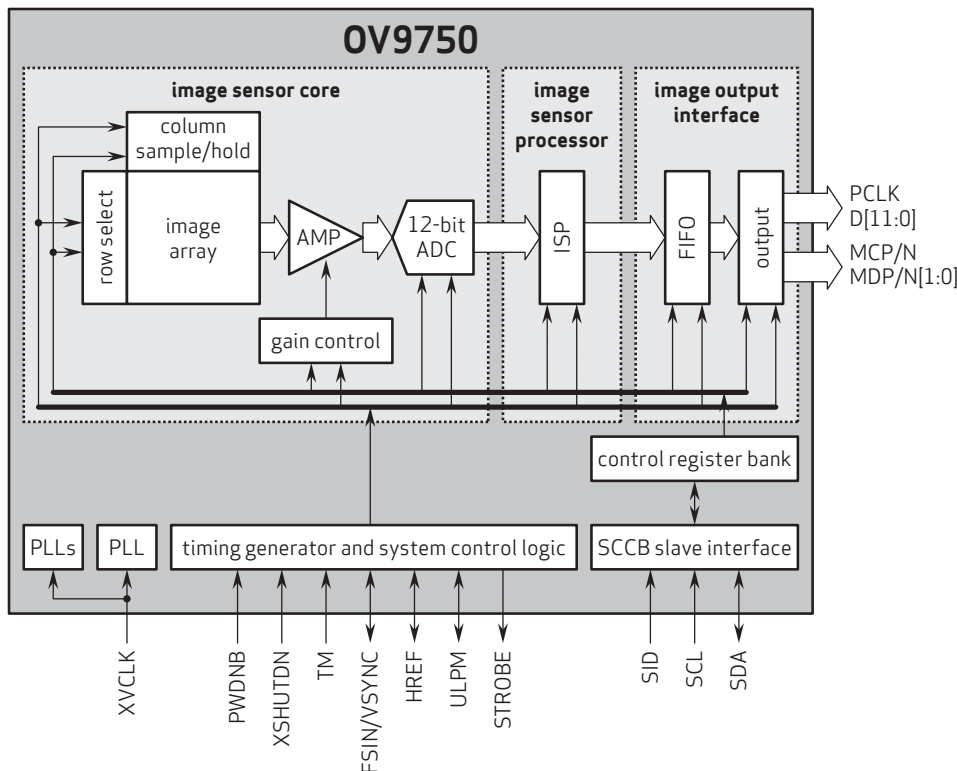

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: + 1 408 567 3000  
Fax: + 1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo, OmniPixel and VarioPixel are registered trademarks of OmniVision Technologies, Inc. OmniBSI-2 is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision