



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



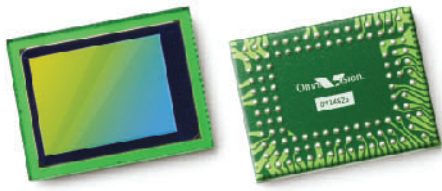

OV14825 14 megapixel product brief



Premium 1080p/60 HD Video and 14.6 Megapixel Photography



available in
a lead-free
package

The OV14825 is the ultimate mobile imaging solution, combining 14.6-megapixel photography with 1080p/60 high definition (HD) video. The 1/2.33-inch OV14825 utilizes OmniVision's most advanced 1.4-micron OmniBSI™ pixel architecture to achieve optimal performance and low-light sensitivity in the industry's smallest format. The 1/2.33-inch OV14825 has an active array of 4416 x 3312 backside illumination pixels operating at 15 fps in full resolution, while delivering full 1080p HD video at 60 fps, using a binning feature to achieve higher sensitivity. In full HD video mode, the sensor also provides additional pixels used for electronic image stabilization (EIS).

The OV14825's 28° chief ray angle (CRA) optimizes it for use in mobile camera applications. The sensor's small form factor is largely attributable to its CSP3 packaging, allowing for the development of ultra compact mobile

products. The OV14825 is also available in RW (bare die) for module integrators. The OV14825 enables camera designs with a low bill of materials and reduced power consumption. It is offered with industry-standard connectivity including LVDS, MIPI and DVP and does not require external IC components.

All required image processing functions, including exposure control, white balance, defective pixel canceling, noise canceling are programmable through the SCCB interface. In addition, OmniVision image sensors use proprietary sensor technology to improve image quality by reducing or eliminating common lighting/electrical sources of image contamination, such as fixed pattern noise and smearing to produce a clean, fully stable color image.

Find out more at www.ovt.com.




Applications

- Digital Still Cameras (DSC)
- Digital Video Camcorders (DVC)

Product Features

- ultra high performance
- support for binning
- automatic image control functions:
 - automatic exposure control (AEC)
 - automatic gain control (AGC)
 - automatic white balance (AWB)
 - automatic band filter (ABF)
 - automatic 50/60 Hz luminance detection
 - automatic black level calibration (ABLC)
- standard serial SCCB interface
- digital video port (DVP) parallel output interface
- LVDS serial output interface
- MIPI serial output interface
- programmable controls for frame rate, mirror and flip, cropping, and windowing
- embedded one-time programmable (OTP) memory for part identification, etc.
- on-chip phase lock loop (PLL)
- image quality controls: lens correction and defective pixel canceling
- programmable I/O drive capability
- built-in 1.5 V regulator for core
- support for output formats:
 - 9/10/11/12-bit RAW RGB (DVP),
 - 9/10/11/12-bit RAW RGB (MIPI/LVDS),
 - CCIR656
- support for horizontal and vertical subsampling
- support for images sizes: 14.6 Mpixel, 12.7 Mpixel, electronic image stabilization (EIS) 1080p, 1080p, EIS720p, 720p, VGA, QVGA, etc.

OV14825




Ordering Information

- OV14825-G04A
(color, chip probing, 200 μm backgrounding, reconstructed wafer)

Product Specifications

- active array size: 4416 x 3312
- maximum image transfer rate:
 - 14.6M (10-bit): 15 fps
 - EIS1080p (9-bit): 60 fps
- power supply:
 - core: 1.5 VDC $\pm 5\%$ (internal regulator option)
 - analog: 2.6 ~ 3.0 V
 - I/O: 1.7 ~ 3.0 V
- sensitivity: >650 mV/(lux-sec)
- scan mode: progressive
- temperature range:
 - operating: -30°C to 70°C
 - stable image: 0°C to 50°C
- maximum exposure interval: 3336 x t_{ROW}
- pixel size: 1.4 μm x 1.4 μm
- well capacity: 4.5 Ke⁻
- dark current: 7.6 mV/sec at 60°C
- fixed pattern noise (FPN): <1% of $V_{\text{PEAK-TO-PEAK}}$
- lens size: 1/2.33"
- lens chief ray angle: 28°
- input clock frequency: 6 ~ 27 MHz
- image area: 6227 μm x 4653 μm
- S/N ratio: 35 dB
- package dimensions: 8950 μm x 6990 μm
- dynamic range: 67 dB

Functional Block Diagram

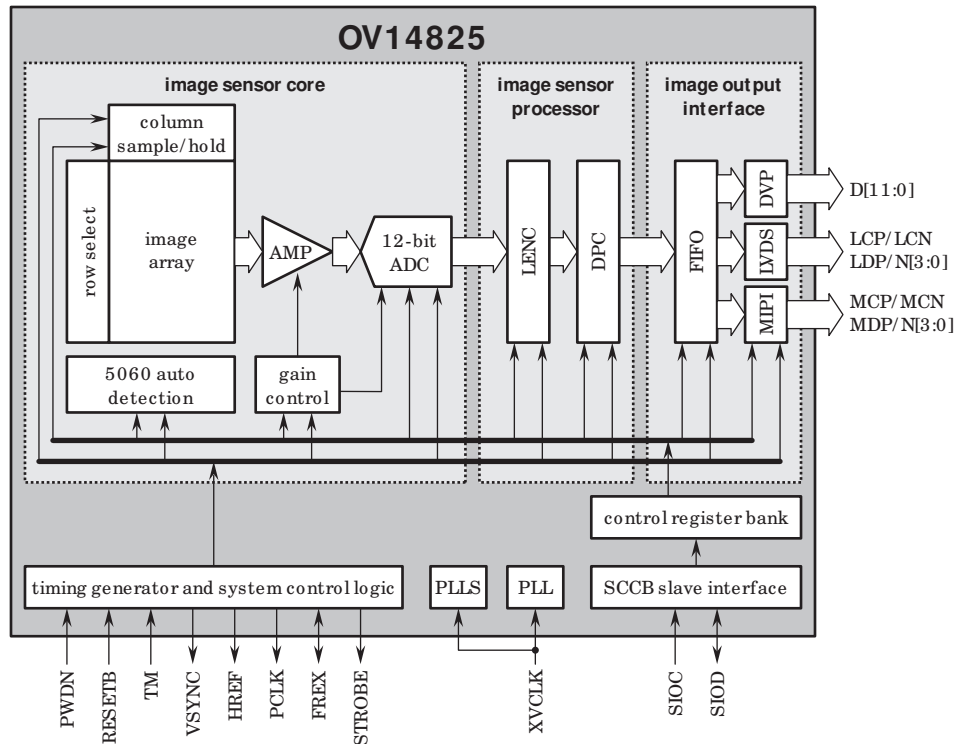

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: +1 408 567 3000
Fax: +1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision is a registered trademark of OmniVision Technologies, Inc. The OmniVision logo and OmniBSI are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

OmniVision