



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Power Line Designer Kit

## 0.5-Watt LED Modules



### OVPL5W3K

#### Contents:

- Five (5) PCBs 8" in length
- Three (3) 0.5-Watt white LEDs per PCB, on-board regulator included
- Wire harness with connector
- Hand insertion tool




The self-contained **Power Line Designer Kit** is a flexible and scalable lighting solution using mid-power LEDs to supply high luminous flux without additional heatsinking requirements. The kit includes components and instructions to allow a designer to configure LED placement as needed for uniform illumination in his application. With a 15-volt power supply (see Notes), the Power Line Kit is a total lighting solution.

#### Applications


- Architectural accent lighting
- Under-counter lighting
- Media illumination
- Lighting for large channel letters
- Backlighting for light boxes
- Point-of-sale displays

PCB with 3LEDs Optek Part No. OPA773	Viewing Angle	Typical CCT	Typical Luminous Flux (lm) @ 15V*
1 board	120°	White 5750K	50
2 boards			100
3 boards			150
4 boards			200
5 boards			250

\*125mA per board stabilized

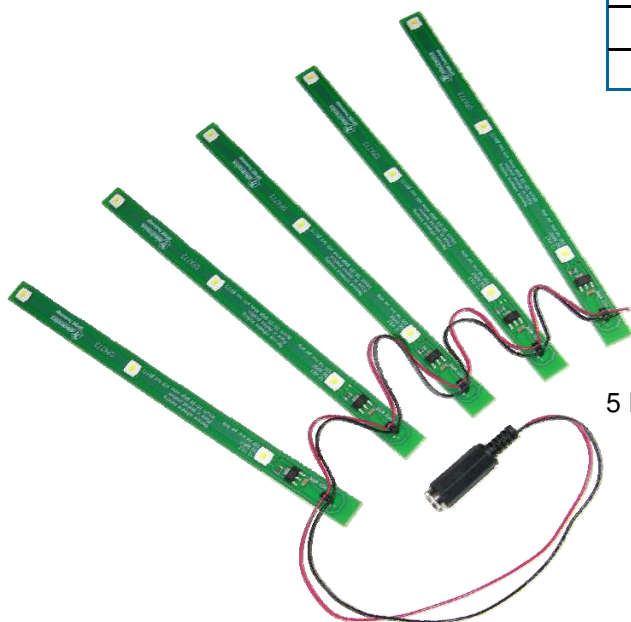

5 PCBs 8.00" x 0.425" wide  
(.062 FR4 material)

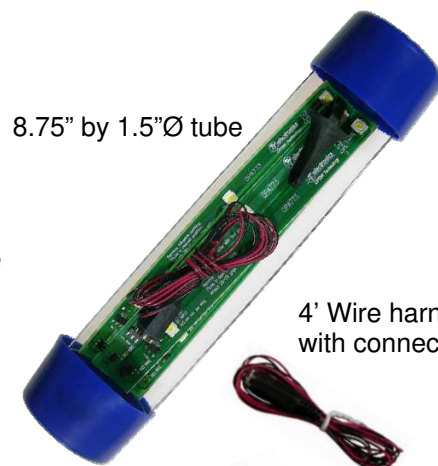

8.75" by 1.5"Ø tube

4' Wire harness  
with connector



Hand Insertion Tool

#### Notes:

- All electrical and optical characteristics of the LEDs remain the same as specified in **Optek Datasheet OVS5WBCR4**.
- Maximum storage and operating temperature -40° ~ +100°C
- ESD threshold (HBM) 2000V
- 14-16V power supply not included. 1.0A minimum rating required, regulated or unregulated.

**DO NOT LOOK DIRECTLY  
AT LED WITH UNSHIELDED  
EYES OR DAMAGE TO  
RETINA MAY OCCUR.**




OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

# Power Line Designer Kit

## OVPL5W3K



### OPA773 Dimensions

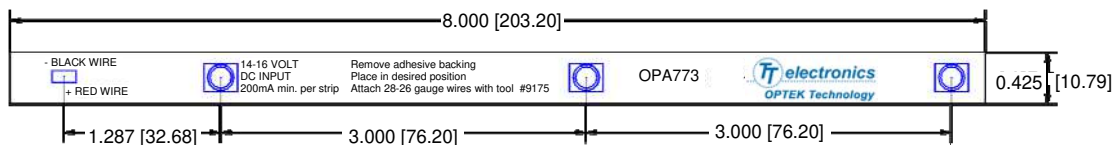

### Suggested Design Options

Optek Part Number	Number of LEDs per Strip	Number of Strips per Buss	LED Drive Current per Strip	AWG	Supply Voltage
OPA773 (included in kit)	3	1 to 5	125mA	26-28	14-16V
OPA775	3	1 to 30	125mA	18	14-16V
OPA776	3	2 to 60*	125mA	18	24V
Optek Custom Assembly**	Other	Other	Other	Other	Other


\*Multiples of 2 only

\*\*Contact Optek or an authorized distributor to discuss your application.

### Instructions

1. Install backplane (not included) behind panel to be illuminated.
2. Use masking tape (not included) to temporarily position the boards on backplane.
3. Route wire harness to each strip:
  - Start with loose end and work toward 2.1mm jack.
  - Use insertion tool to insert red and black wires on each board.
  - Leave several inches of slack between each strip.
4. Connect the 2.1mm jack to 14-16V power supply (not included, must be rated at 1.0A minimum).
5. Reposition all boards until optimal illumination is achieved.
6. Peel tape backing from boards.
7. Permanently apply boards to backplane.

**Note:** Steps 6 and 7 are optional—do not peel off backing if the kit will be reused.

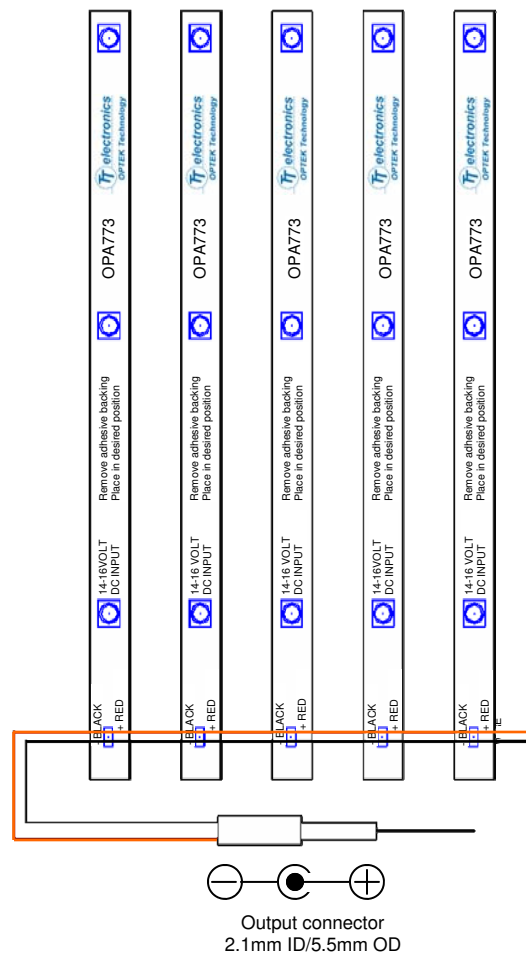

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.