



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# OX200-SC 10 MHz VCOCXO CO-8 Package

# CONNOR WINFIELD



2111 Comprehensive Drive

Aurora, Illinois 60505

Phone: 630-851-4722

Fax: 630-851-5040

www.conwin.com

US Headquarters:

630-851-4722

European Headquarters:

+353-61-472221

## Description:

Connor-Winfield model OX200-SC is a 12 Vdc, Oven Compensated Crystal Oscillator with Voltage Control Option (VCOCXO) in a CO-8 package. The OX200-SC is designed for use with applications that require a LVCMOS output, very high frequency stability, low jitter and low phase noise.



## Features:

- VCOCXO
- 12 Vdc Operation
- CO-8 Footprint
- Frequency Stability:  $\pm 1.5$  ppb
- Temperature Range: 0 to 70°C
- LVCMOS Output
- Low Jitter and Phase Noise
- RoHS Compliant / Lead Free

## Absolute Maximum Ratings

Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-55	-	125	°C	
Operable Temperature Range:	-55	-	85	°C	
Supply Voltage (Vcc)	-	-	15	Vdc	
Output Load	-	-	50	pF	CMOS Signal

## Frequency Stabilities

Parameter	Minimum	Nominal	Maximum	Units	Notes
Center Frequency: (Fo)	-	10.0	-	MHz	
Frequency Calibration	-25	-	25	ppb	1
Frequency Stability					
vs. Temperature (0 to 70 °C)	-1.5	-	1.5	ppb	2
vs. Warm Up (60 minutes on)	-200	-	200	ppb	7 days off
vs. Warm Up (120 minutes on)	-100	-	100	ppb	7 days off
vs. Warm Up (24 hours on)	-200	-	200	ppb	unlimited time off
vs. Warm Up (72 hours on)	-100	-	100	ppb	unlimited time off
vs. Supply Voltage Change	-0.3	-	0.3	ppb	Vcc $\pm 5\%$
vs. Load Change	-0.3	-	0.3	ppb	Load $\pm 5\%$
vs. Aging per day	-0.2	-	0.2	ppb	30 days operation
vs. Aging 5 Years	-60	-	60	ppb	72 hrs. operation
Total Tolerance	-100	-	100	ppb	3
Operating Temperature Range:	0	-	70	°C	

## Supply Voltage (Vcc)

Parameter	Minimum	Nominal	Maximum	Units	Notes
Supply Voltage: (Vcc)	11.4	12.0	12.6	Vdc	
Power Consumption:					
Turn On	-	-	9	W	Warm up
Steady State	-	-	3	W	@ 25°C

## Input Characteristics - Voltage Control (Vc)

Parameter	Minimum	Nominal	Maximum	Units	Notes
Tuning Range	$\pm 0.2$	-	-	ppm	
Tuning Sensitivity	0.1	-	0.3	ppm/V	
Linearity	-	-	20	%	
Control Voltage Range	0.0	2.5	4.0	Vdc	
Tuning Slope		Positive			

## LVCMOS Output Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Load	-	-	15	pF	
Voltage: High (Voh)	3.0	-	3.6	Vdc	
Low (Vol)	-	-	0.2		
Duty Cycle (Voh-Vol/2)	45	50	55	%	
Output Current	-	-	2.5	mA	
SSB Phase Noise at 1Hz offset	-	-	-90	dBc/Hz	
SSB Phase Noise at 10Hz offset	-	-	-115	dBc/Hz	
SSB Phase Noise at 100Hz offset	-	-	-135	dBc/Hz	
SSB Phase Noise at 1KHz offset	-	-	-140	dBc/Hz	
SSB Phase Noise at 10KHz offset	-	-	-140	dBc/Hz	

Bulletin **Cx194**Page **1 of 2**Revision **05**Date **19 Nov 2013**



## Package Characteristics

Package CO-8 footprint, resistive welded package with grounded case.


## Environmental Characteristics

Shock	500 G's 1ms, Halfsine, 3 shocks per direction, per MIL-STD 202F, Method 213B Test Condition D.
Sinusoidal Vibration	0.06" D.A. or 10G's Peak, 10 to 500 Hz, per MIL-STD-202F, Method 204D, Test Condition A.
Random Vibration	5.35 G's rms. 20 to 2000 Hz per MIL-STD-202F, Method 214, Test Condition 1A, 15 minutes each axis.
Moisture	10 cycles, 95% RH, Per MIL-STD-202F, Method 112.
Marking Permanency	Per MIL-STD-202F, Method 215J.
Attachment Method PCB	Through Hole Mounted
Resistance to Solder Heat	Per MIL-STD-202F, Method 210, Condition E.
Solder Process	RoHS compliant, lead free. See solder profile.

### Notes:

1. At time of shipment after 60 minutes of operation, @25°C, Vc = 2.5 Vdc.
2. Frequency stability vs. change in temperature [ $\pm(F_{max}-F_{min})/(2*F_0)$ ].
3. 5 years from time of shipment after 72 hours of operation and Vc = 2.5 Vdc.


## Package Outline

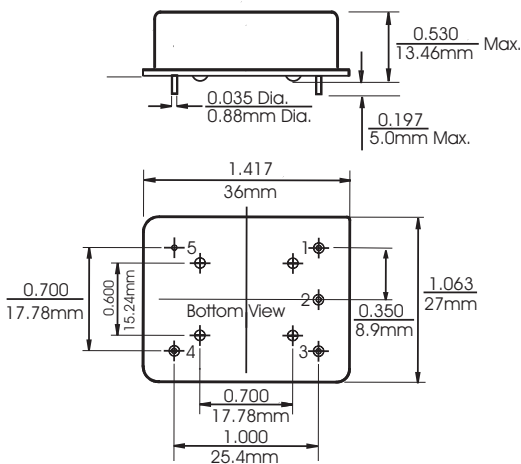

## Pin Connections


Pin	Connection
1:	Voltage Control (Vc)
2:	N/C
3:	Supply Voltage (Vcc)
4:	RF Output
5:	Ground (Case)

## Solder Profile




Meets IPC/JEDEC J-STD-020C

## Test Circuit

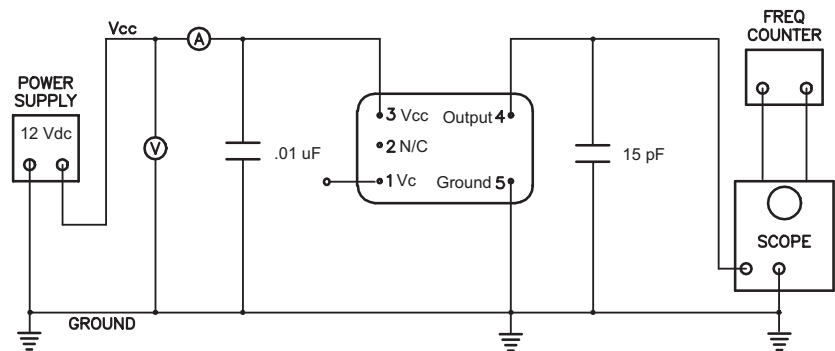

## Marking Diagram



Pin 1

Date Code (YYWW)  
Model Number  
Output Frequency  
Serial # Barcode  
Serial Number

## Revision History

Revision	Date	Description
00	11/12/09	New issue
01	11/30/10	Added aging 5 years
02	04/05/12	Changed from 3ppb absolute to +/-1.5ppb
03	09/18/12	Updated marking information
04	04/10/13	Changed HCMOS to LVCMOS
05	11/19/13	Added Voltage Control

## Ordering Information

OX200-SC - 010.0M

OCXO SERIES

CENTER FREQUENCY

Bulletin	<b>Cx194</b>
Page	<b>2 of 2</b>
Revision	<b>05</b>
Date	<b>19 Nov 2013</b>