



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SERIES


P1812R
P1812

RoHS
Compliant
Traditional
First Quality

Surface Mount Power Inductors



Actual Size

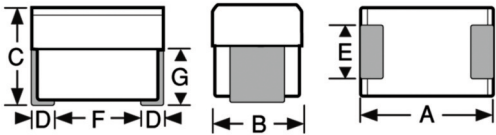

Physical Parameters

	Inches	Millimeters
A	0.166 to 0.190	4.22 to 4.83
B	0.118 to 0.134	3.00 to 3.40
C	0.118 to 0.134	3.00 to 3.40
D	0.015 Min.	0.38 Min.
E	0.054 to 0.078	1.37 to 1.98
F	0.118 (Ref. only)	3.00 (Ref. only)
G	0.066 (Ref. only)	1.68 (Ref. only)

Dimensions "A" and "C" are over terminals

Operating Temperature Range -55°C to +125°C

Current Rating at 90°C Ambient 35°C Rise

Maximum Power Dissipation at 90°C 0.278 W

Inductance Measured at 1V with no DC current

Incremental Current The current at which the inductance will be decreased by a maximum of 5% from its initial zero DC value.

Marking API/SMD; inductance with units and tolerance followed by an SP; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: P1812-182K
API/SMD
1.8uH±10%P
0808B

Packaging Tape & reel (12mm): 7" reel, 650 pieces max.; 13" reel, 2500 pieces max.

Made In the U.S.A.

Power Inductors

INCREMENTAL CURRENT (mA DC)

CURRENT RATING MAXIMUM (mA DC)

DC RESISTANCE MAXIMUM (OHMS)

INDUCTANCE (uH) ±10% @ 1 kHz

DASH NUMBER*

SERIES P1812 FERRITE CORE				
-102K	1.0	0.113	1050	2400
-122K	1.2	0.199	1000	2158
-152K	1.5	0.222	950	1980
-182K	1.8	0.240	900	1828
-222K	2.2	0.268	850	1697
-272K	2.7	0.288	800	1513
-332K	3.3	0.323	750	1397
-392K	3.9	0.347	700	1250
-472K	4.7	0.401	650	1131
-562K	5.6	0.437	650	1060
-682K	6.8	0.472	600	990
-822K	8.2	0.548	600	871
-103K	10	0.608	550	772
-123K	12	0.670	550	752
-153K	15	0.780	450	693
-183K	18	0.875	400	614
-223K	22	1.200	370	515
-273K	27	1.404	330	465
-333K	33	1.578	300	425
-393K	39	1.848	280	376
-473K	47	2.064	260	366
-563K	56	2.268	240	336
-683K	68	3.408	220	297
-823K	82	3.648	200	267
-104K	100	4.320	180	238
-124K	120	6.000	160	208
-154K	150	6.432	140	183
-184K	180	8.400	120	158
-224K	220	9.680	120	143
-274K	270	12.720	100	129
-334K	330	15.240	90	118

Optional Tolerances: J = 5% H = 3% G = 2%

*Complete part # must include series # PLUS the dash #

For surface finish information, refer to www.delevanfinishes.com

