



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



P3P18S19B

Notebook LCD Panel EMI Reduction IC

Product Description

The P3P18S19B is a Versatile Spread Spectrum Frequency Modulator designed specifically for input clock frequencies from 20 to 40 MHz. (Refer to “Input Frequency and Modulation Rate” Table). The P3P18S19B reduces electromagnetic interference (EMI) at the clock source, allowing system wide reduction of EMI of downstream clock and data dependent signals. The P3P18S19B allows significant system cost savings by reducing the number of circuit board layers, ferrite beads, shielding, and other passive components that are traditionally required to pass EMI regulations.

The P3P18S19B modulates the output of a single PLL in order to “spread” the bandwidth of a synthesized clock, and more importantly, decreases the peak amplitudes of its harmonics. This results in significantly lower system EMI compared to the typical narrow band signal produced by oscillators and most frequency generators. Lowering EMI by increasing a signal’s bandwidth is called ‘Spread Spectrum Clock Generation’.

The P3P18S19B uses the most efficient and optimized modulation profile approved by the FCC and is implemented in a proprietary all digital method.

Applications

The P3P18S19B is targeted towards EMI management for memory and LVDS interfaces in mobile graphic chipsets and high-speed digital applications such as PC peripheral devices, consumer electronics, and embedded controller systems.

Features

- FCC Approved Method of EMI Attenuation
- Provides up to 15 dB EMI Reduction
- Generates a Low EMI Spread Spectrum Clock and a Non-spread Reference Clock of the Input Frequency
- Optimized for Frequency Range from 20 to 40 MHz
- Internal Loop Filter Minimizes External Components and Board Space
- Low Inherent Cycle-to-Cycle Jitter
- Two Spread % Selections: -1.25% to -1.75%
- 3.3 V Operating Voltage
- CMOS Design
- Supports Notebook VGA and other LCD Timing Controller Applications
- Power Down Function for Mobile Application
- Available in 8-pin SOIC Package
- These Devices are Pb-Free and are RoHS Compliant




ON Semiconductor®

www.onsemi.com




SOIC-8 NB
CASE 751

PIN CONFIGURATION

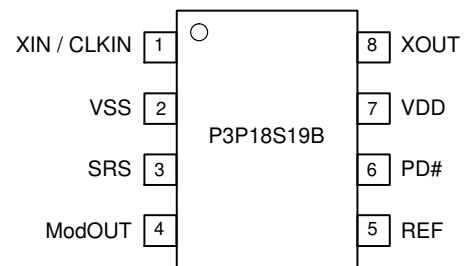

MARKING DIAGRAM



ABS = Specific Device Code
A = Assembly Location
L = Wafer Lot
Y = Year
W = Work Week
■ = Pb-Free Package

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 3 of this data sheet.

P3P18S19B

Block Diagram

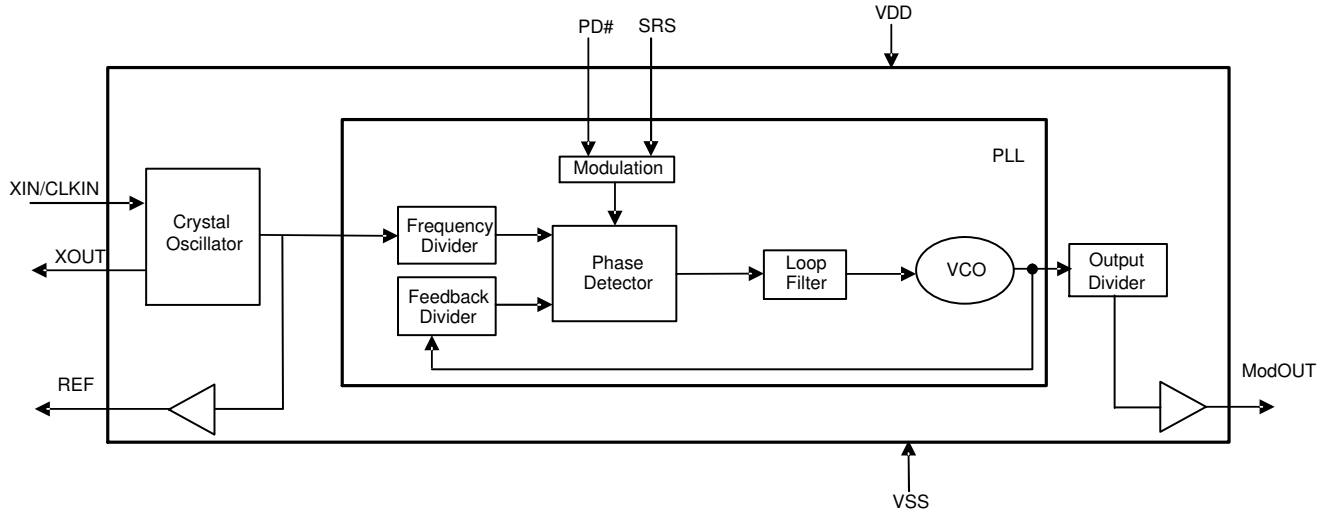


Figure 1. Block Diagram

Table 1. PIN DESCRIPTION

| Pin # | Pin Name | Type | Description |
|-------|-------------|------|--|
| 1 | XIN / CLKIN | I | Crystal Connection or external frequency input. This pin has dual functions. It can be connected to either an external crystal or an external reference clock. |
| 2 | VSS | P | Ground Connection. Connect to system ground. |
| 3 | SRS | I | Spread range select. Digital logic input used to select frequency deviation (Refer to Spread Deviation Selection Table). This pin has an internal pullup resistor. |
| 4 | ModOUT | O | Spread spectrum clock output. (Refer to Input Frequency and Modulation Rate Table and Spread Deviation Selection Table) |
| 5 | REF | O | Non-modulated Reference clock output of the input frequency. |
| 6 | PD# | I | Power down control pin. Pull LOW to enable Power-Down mode. This pin has an internal pull-up resistor. |
| 7 | VDD | P | Power Supply for the entire chip. |
| 8 | XOUT | O | Crystal Connection. Input connection for an external crystal. If using an external reference, this pin must be left unconnected. |

Table 2. INPUT FREQUENCY AND MODULATION RATE

| Part Number | Input Frequency Range | Output Frequency Range | Modulation Rate |
|-------------|-----------------------|------------------------|-----------------------|
| P3P18S19B | 20 MHz to 40 MHz | 20 MHz to 40 MHz | Input Frequency / 512 |

Table 3. SPREAD DEVIATION SELECTION

| Part Number | SRS | Spread Deviation |
|-------------|-----|------------------|
| P3P18S19B | 0 | -1.25% (DOWN) |
| | 1 | -1.75% (DOWN) |

P3P18S19B

Table 4. ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Rating | Unit |
|------------------|---|--------------|------|
| VDD, VIN | Voltage on any pin with respect to Ground | -0.5 to +4.6 | V |
| T _{STG} | Storage temperature | -65 to +125 | °C |
| T _s | Max. Soldering Temperature (10 sec) | 260 | °C |
| T _J | Junction Temperature | 150 | °C |
| T _{DV} | Static Discharge Voltage (As per JEDEC STD22- A114-B) | 2 | KV |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Table 5. DC ELECTRICAL CHARACTERISTICS

| Symbol | Parameter | Min | Typ | Max | Unit |
|------------------|---|------------------------------|------|-------------------------------|------|
| V _{IL} | Input Low voltage | VSS - 0.3 | | 0.8 | V |
| V _{IH} | Input High voltage | 2.0 | | VDD + 0.3 | V |
| I _{IL} | Input Low current (inputs PD#, SRS) | -60.0 | | -20.0 | μA |
| I _{IH} | Input High current | | | 1.0 | μA |
| I _{XOL} | X _{OUT} Output low current @ 0.4 V, VDD = 3.3 V | | 3 | | mA |
| I _{XOH} | X _{OUT} Output high current @ 2.5 V, VDD = 3.3 V | | 3 | | mA |
| V _{OL} | Output Low voltage VDD = 3.3 V, I _{OL} = 20 mA | | | 0.4 | V |
| V _{OH} | Output High voltage VDD = 3.3 V, I _{OH} = 20 mA | 2.5 | | | V |
| I _{CC} | Dynamic supply current normal mode 3.3 V and 25 pF probe loading | 7.1 f _{IN} - min | | 26.9 f _{IN} - max | mA |
| I _{DD} | Static supply current standby mode | | 4.5 | | mA |
| V _{DD} | Operating Voltage | | 3.3 | | V |
| t _{ON} | Power up time (first locked clock cycle after power up) | | 0.18 | | mS |
| Z _{OUT} | Clock Output impedance | | 50 | | Ω |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Table 6. AC ELECTRICAL CHARACTERISTICS

| Symbol | Parameter | Min | Typ | Max | Unit |
|-------------------|---|------|------|-----|------|
| f _{IN} | Input Frequency | 20 | | 40 | MHz |
| f _{OUT} | Output Frequency | 20 | | 40 | MHz |
| t _{LH} * | Output Rise time (Measured from 0.8 V to 2.0 V) | | 0.66 | | nS |
| t _{HL} * | Output Fall time (Measured from 2.0 V to 0.8 V) | | 0.65 | | nS |
| t _{JC} | Jitter (Cycle-to-cycle) | -200 | | 200 | pS |
| t _D | Output Duty cycle | 45 | 50 | 55 | % |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

* t_{LH} and t_{HL} are measured into a capacitive load of 15 pF

Table 7. ORDERING INFORMATION


| Part Number | Marking | Package Type | Temperature |
|-----------------|---------|----------------------------------|--------------|
| P3P18S19BF-08SR | ABS | 8 pin SOIC, TAPE & REEL, Pb Free | 0°C to +70°C |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lpm.

P3P18S19B

PACKAGE DIMENSIONS

SOIC-8 NB
CASE 751-07
ISSUE AK

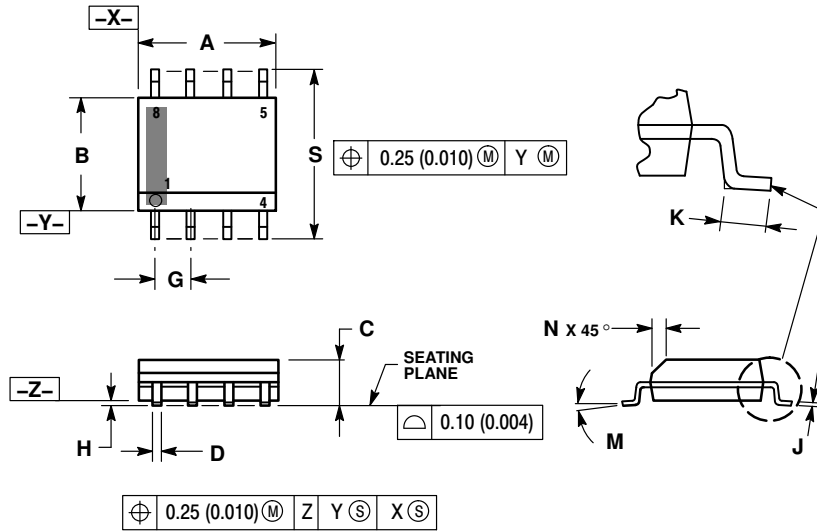


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. 751-01 THRU 751-06 ARE OBSOLETE. NEW STANDARD IS 751-07.

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 4.80 | 5.00 | 0.189 | 0.197 |
| B | 3.80 | 4.00 | 0.150 | 0.157 |
| C | 1.35 | 1.75 | 0.053 | 0.069 |
| D | 0.33 | 0.51 | 0.013 | 0.020 |
| G | 1.27 BSC | | 0.050 BSC | |
| H | 0.10 | 0.25 | 0.004 | 0.010 |
| J | 0.19 | 0.25 | 0.007 | 0.010 |
| K | 0.40 | 1.27 | 0.016 | 0.050 |
| M | 0° | 8° | 0° | 8° |
| N | 0.25 | 0.50 | 0.010 | 0.020 |
| S | 5.80 | 6.20 | 0.228 | 0.244 |

SOLDERING FOOTPRINT*

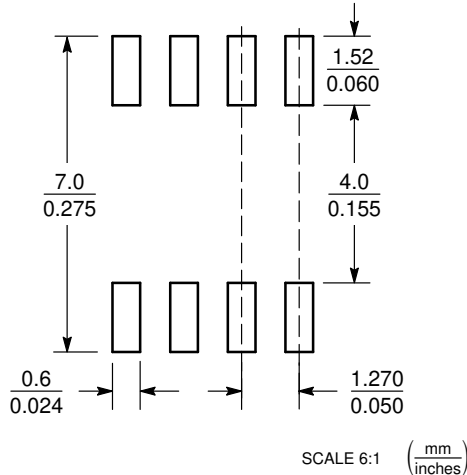

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and the are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative