



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Presta™ Standard Penta-Band Cellular Embedded Antenna


850/ 900/ 1800/ 1900/ 2100 MHz



Ethertronics' Presta series of Isolated Magnetic Dipole™(IMD) embedded antennas address the challenges facing today's product designers. IMD's high performance and isolation characteristics offer better connectivity and minimal interference. Presta antennas can be used in a variety of applications including:

- M2M
- Automotive
- Automatic Meter Reading
- Healthcare
- Point of Sale
- Tracking

TECHNOLOGY ADVANTAGES



Stays in Tune

IMD antenna technology provides superior RF field containment, resulting in less interaction with surrounding components. Ethertronics IMD antennas **resist de-tuning**; providing a robust radio link regardless of the usage position.

Presta antennas use patented IMD technology in a stamped metal configuration to provide high performance. IMD antennas requires a smaller design keep-out area, carry lower program development risk which yields a quicker time-to-market, without sacrificing RF performance.



KEY BENEFITS

DESIGN ADVANTAGES

Reduced Costs and Time-to-Market

- Standard antenna eliminates design fees and cycle time associated with a custom solution; getting products to market faster.

Greater Flexibility with Unique Form Factors

- Ethertronics' IMD technology helps you deliver more advanced ergonomic designs without adverse impact on product performance.
- SMD mountable design enables faster and lower cost manufacturing.

RoHS Compliant

- Ethertronics' antennas are fully compliant with the European RoHS Directive 2002/ 95/ EC.

END USER ADVANTAGES

Unique Form Factors Support Advanced Industrial Designs

- Smaller, more efficient IMD embedded antennas break through restrictive design rules and provide new freedom in component placement.

Superior Range

- Better antenna function means longer range and greater sensitivity to critically precise signals—delivering greater customer satisfaction while building brand loyalty.

SERVICE AND SUPPORT

Extensive RF Experience

- Our Presta antennas are supported by documentation, and when needed, by the expertise of RF engineers who have integrated hundreds of antenna designs into wireless devices.

Global Operations & Design Support

- Ethertronics' global operations supports an integrated network of design centers that can take projects from concept to production.

PRODUCT: Cellular

Example: Ethertronics' Penta-Band Internal (Embedded) Antenna Specifications.

Below are the typical specs for a Penta-Band application (subject to change).

Electrical Specifications


Typical Characteristics

Measurements taken with no ground plane or a 65 x 110 mm ground plane.

Antenna mounted directly on PC + ABS housing material.

Cellular Antenna (MHz)	824-849, 869-894	880-915, 925-960	1710-1785, 1805-1880	1850-1910, 1930-1990	1920-1980, 2110-2170
Peak Gain (no ground)	-0.2dBi	-0.6dBi	3.4dBi	3.2dBi	1.9dBi
Peak Gain (horizontal ground)	2.5dBi	1.7dBi	1.7dBi	3.2dBi	3.8dBi
Peak Gain (vertical ground)	3.0dBi	2.4dBi	2.3dBi	2.7dBi	3.4dBi
Average Efficiency (no ground)	45%	40%	60%	45%	45%
Average Efficiency (horizontal ground)	73%	62%	63%	66%	62%
Average Efficiency (vertical ground)	78%	67%	60%	60%	60%
VSWR Match	3.0:1 max				
Feed Point Impedance	50 ohms unbalanced (other if required)				
Radiation Pattern	Omni-directional				
Power Handling	2 Watt cw				
Polarization	Linear				


Mechanical Specifications

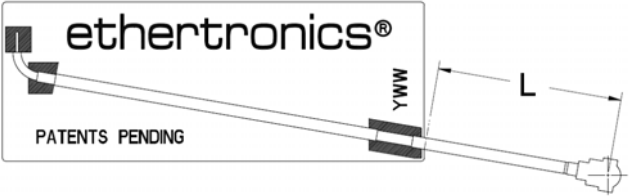Maximum Dimensions	41.0 0x 15.00x. 12 mm (1.25m high at cable solder connection)
Cable / Connector	Contact Ethertronics for details
Cable Length	<p>P522306—Antenna with 200mm cable, EP, U.FL receptacle compatible P522307—Antenna with 100mm cable, MMCX Plug, Male Right Angle connector P522308—Antenna with 200mm cable, MMCX Plug, Male Right Angle connector P522309—Antenna with 100mm cable, EP, U.FL receptacle compatible P522310—Antenna with 18mm cable, EP, U.FL receptacle compatible</p> 


PRODUCT: Cellular

Test Set-up


Antenna mounted directly on PC + ABS housing material.

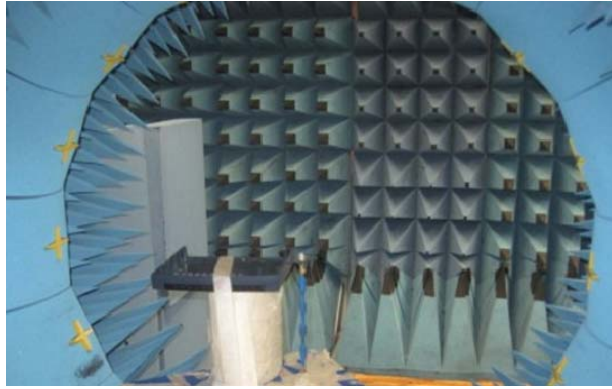

— No Ground


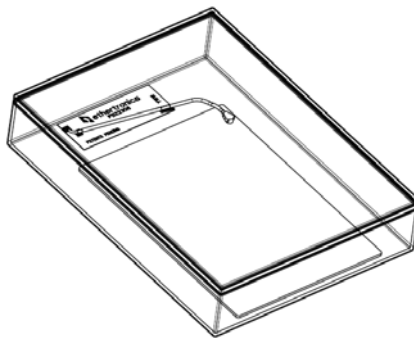


— Horizontal Ground

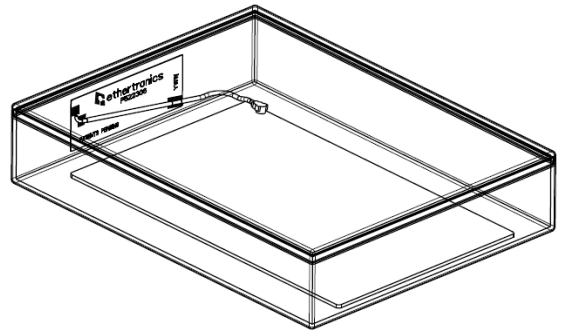


— Vertical Ground


Typical Efficiency

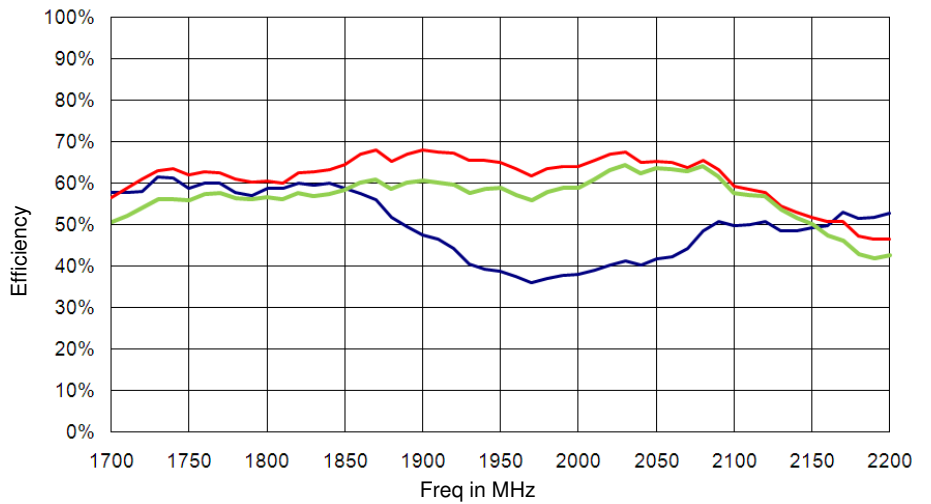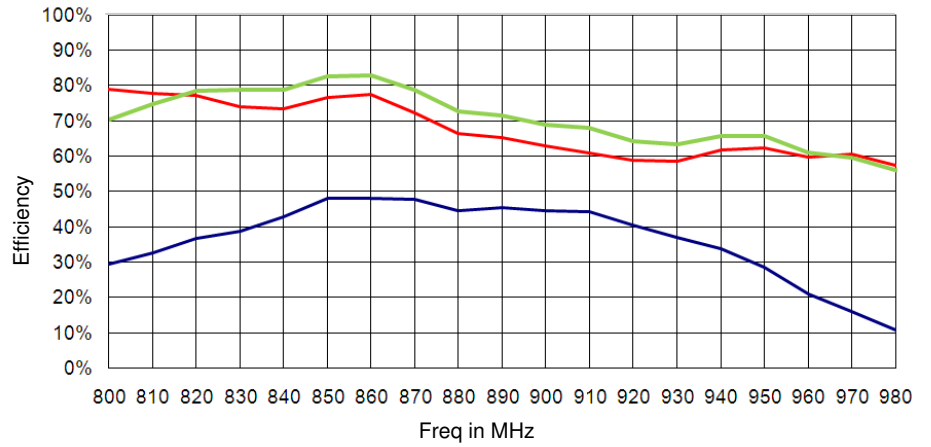

Typical Return Loss

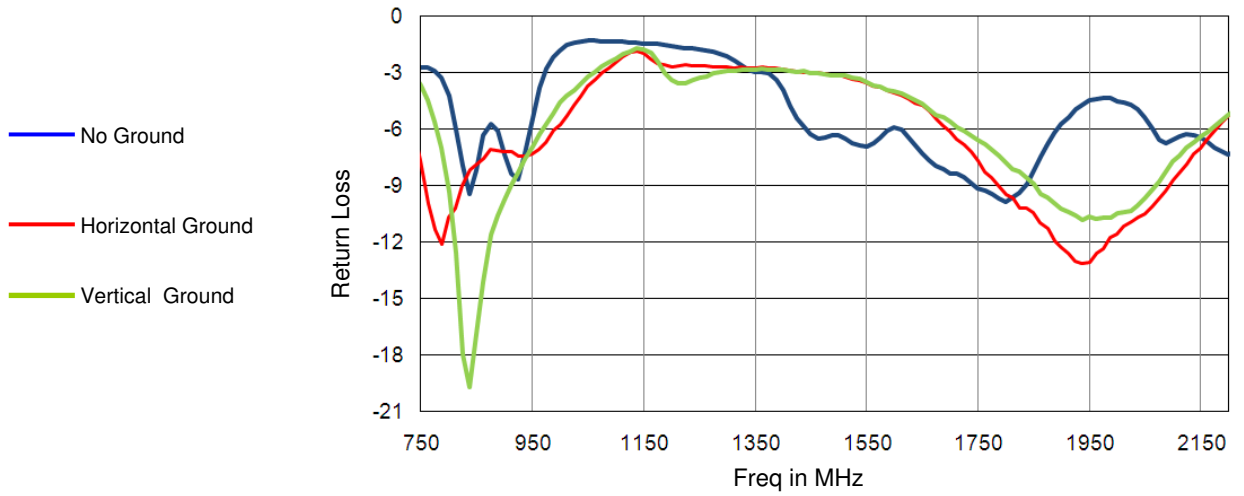

VSWR

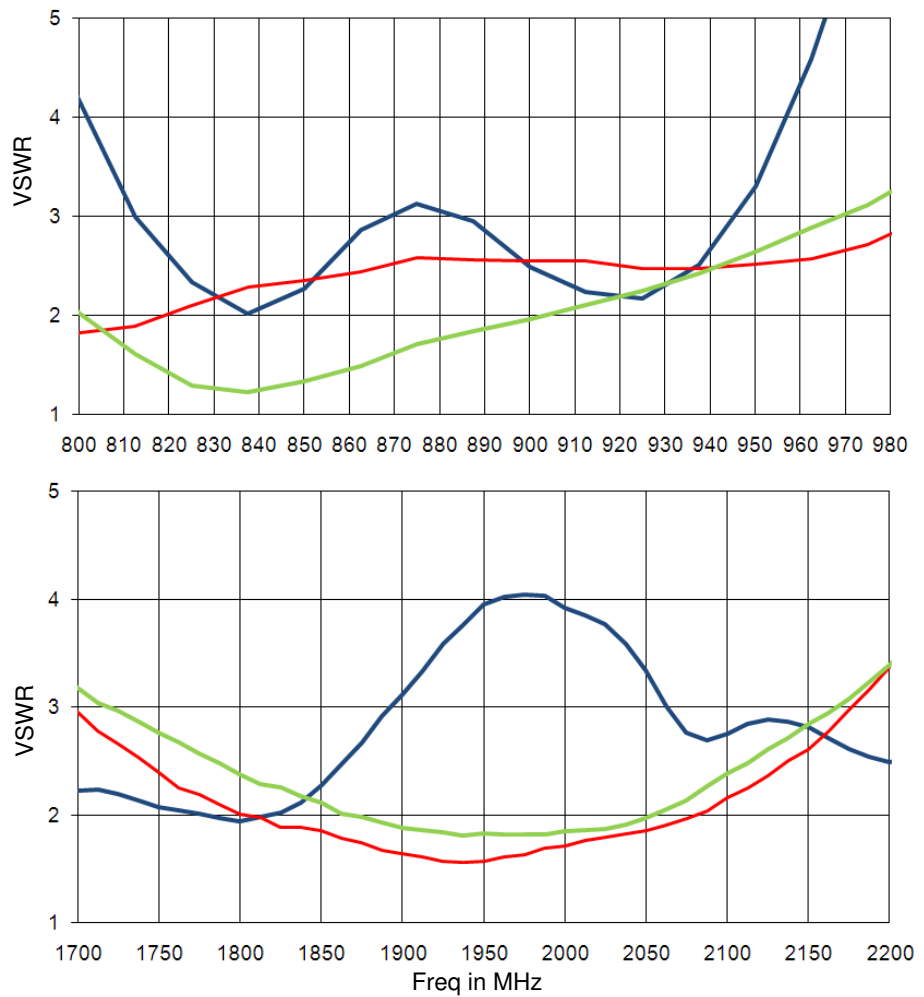


PRODUCT: Cellular

Antenna Radiation Patterns




No Ground

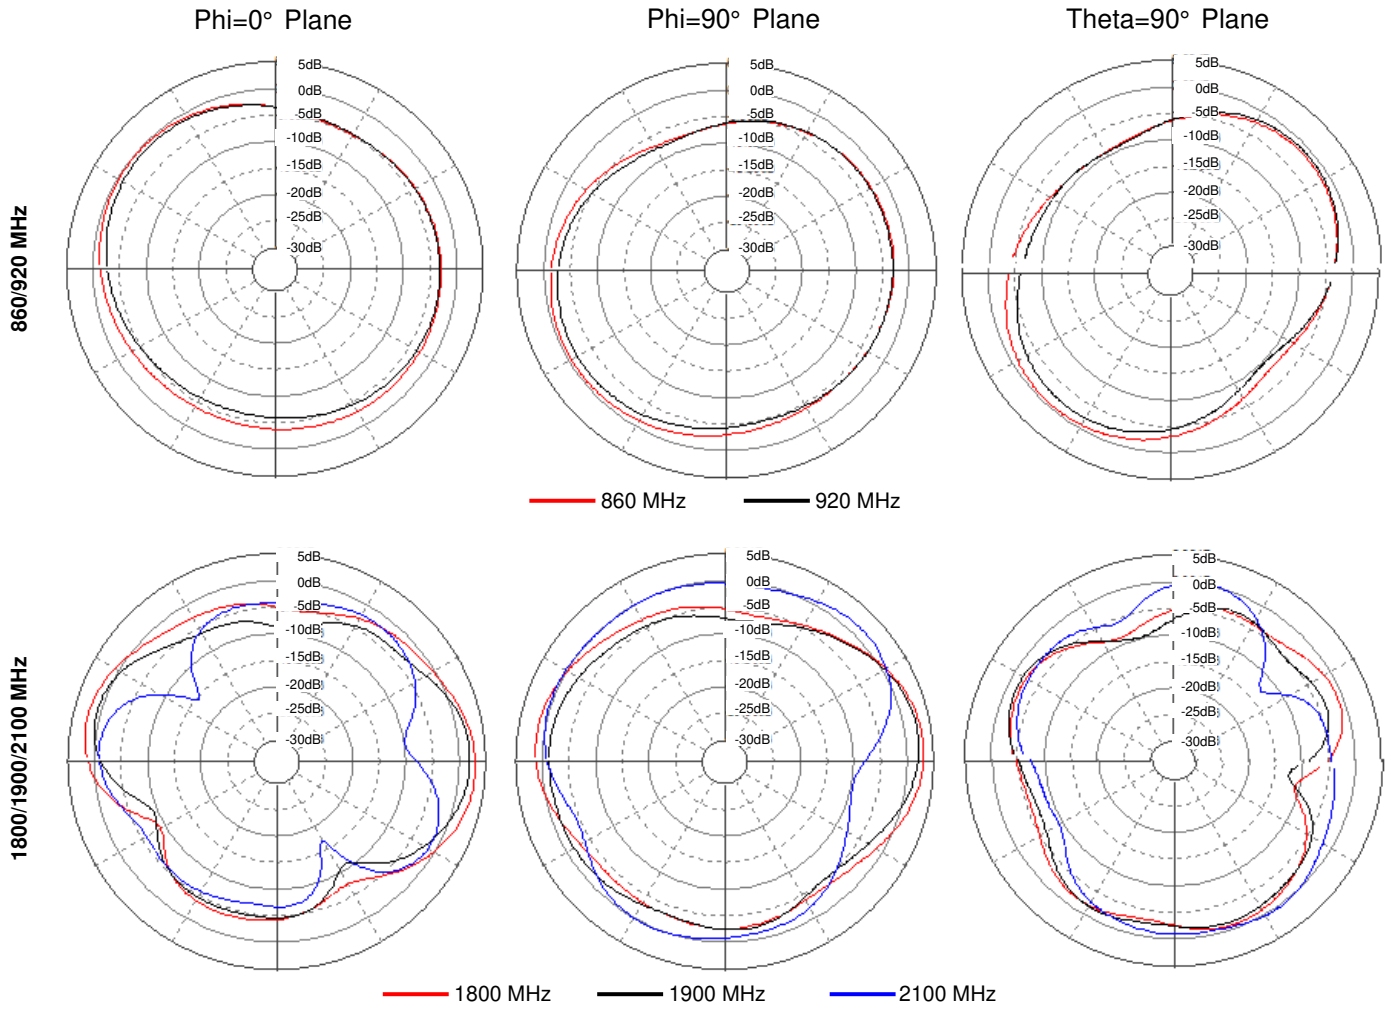


PRODUCT: Cellular

Antenna Radiation Patterns




Horizontal Ground

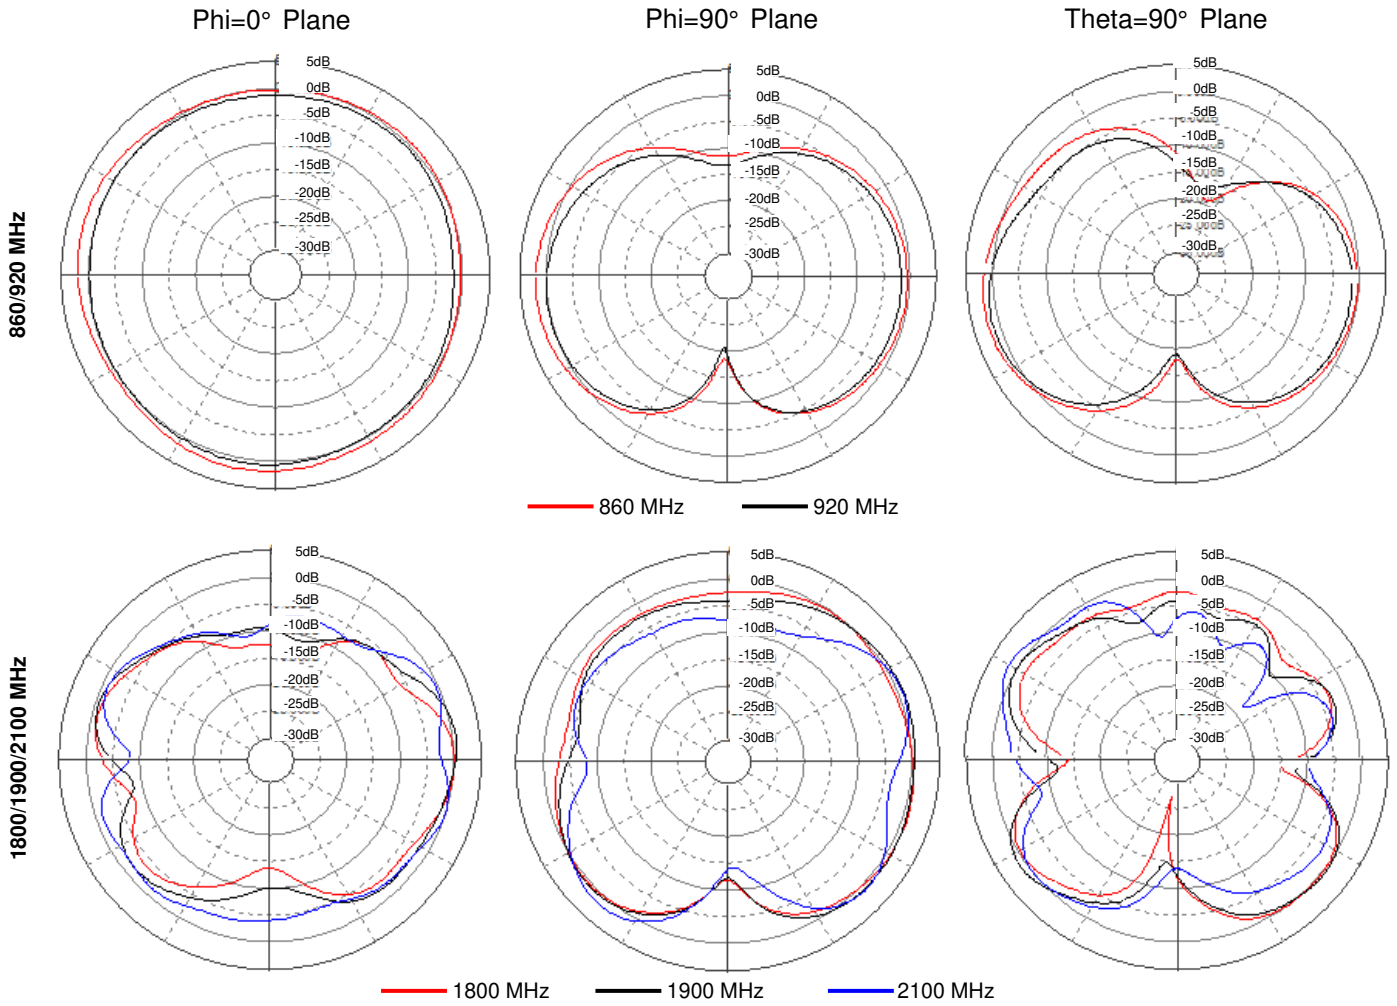

PRODUCT: Cellular

Antenna Radiation Patterns



Vertical Ground

