



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



High-Speed HDMI 4K Cable with Digital Video and Audio, Ultra HD 4K x 2K @ 30 Hz (M/M), White, 16 ft.

MODEL NUMBER: P568-016-WH

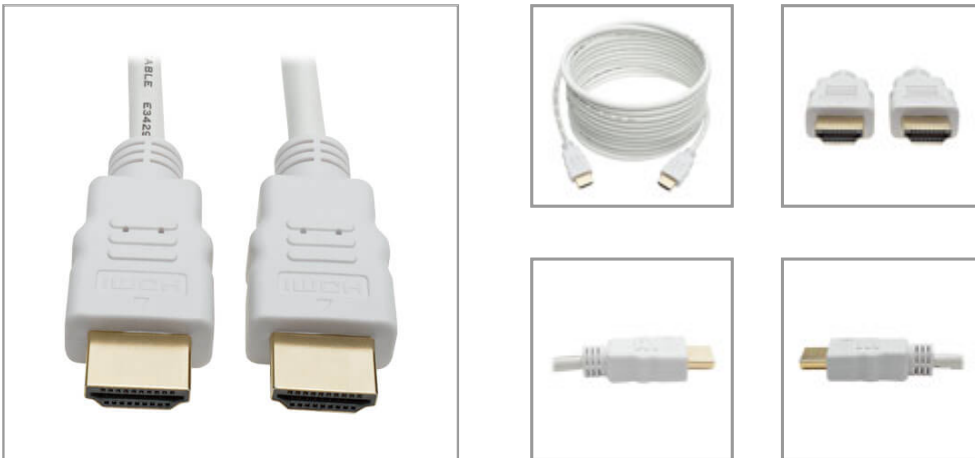

Premium HDMI cable connects two 4K-enabled devices, including computers, Blu-ray™ players, video game systems, DVRs, video cameras, A/V receivers, monitors, projectors and televisions.

Description

The P568-016-WH High-Speed HDMI 4K Cable (M/M) is recommended for digital signage, video presentations, point-of-sale displays, classrooms and other applications that display Ultra High Resolution (UHD) video and multi-channel audio. It connects 4K-enabled source devices, such as computers and Blu-ray players, to 4K-enabled displays, such as monitors, projectors and televisions.

This cable supports video resolutions up to Ultra HD 4K x 2K (3840 x 2160) at 30 Hz and data transfer speeds up to 18 Gbps. When used with an Apple® digital AV adapter, it supports iPad2® video mirroring for playing games, watching videos or displaying presentations.

The 16-foot molded 30 AWG cable features premium foil and braid shielding to deliver reliable, error-free signal quality and protection from EMI/RFI line noise that can distort or destroy data. Gold-plated white connectors provide maximum conductivity and minimize data loss. Integral strain relief gives the cable extra flexibility, reduces stress, and helps the cable and connectors move freely without cracking. A flexible PVC jacket makes the HDCP 2.2-compliant cable easy to install in tight spaces.

Features

Connects HDMI Source to 4K TV, Projector or Monitor

- Ideal for digital signage, video presentations, point-of-sale displays, classrooms and other applications with 4K video and multi-channel audio

High Performance and Wide Compatibility

- Supports UHD video resolutions up to 3840 x 2160 (4K x 2K) @ 30 Hz

Highlights

- Supports UHD video resolutions up to 3840 x 2160 (4K x 2K) @ 30 Hz
- Supports data transfer speeds up to 18 Gbps
- Complies with HDCP 2.2 standards
- Premium foil and braid shielding protects against EMI/RFI noise
- Gold-plated white connectors for optimal signal transfer

Package Includes

- P568-016-WH High-Speed HDMI 4K Cable (M/M), White, 16 ft.



- Supports data transfer speeds up to 18 Gbps
- Complies with HDCP 2.2 standards
- Supports iPad2 video mirroring when used with Apple digital A/V adapter
- Backward compatible with previous HDMI generations

Superior Quality Ensures a Flawless Signal

- Corrosion-resistant gold-plated white connectors for maximum conductivity and minimum data loss
- Fully molded 30 AWG construction with integral strain relief reduces stress and adds flexibility
- Premium foil and braid shielding for EMI/RFI noise protection
- Flexible PVC jacket easy to install in tight spaces

Specifications

| OVERVIEW | |
|---------------------------------|----------------------------|
| UPC Code | 037332203526 |
| Technology | HDMI (All types) |
| INPUT | |
| Cable Length (ft.) | 16 |
| Cable Length (m) | 4.9 |
| PHYSICAL | |
| Wire Gauge (AWG) | 30 |
| Shipping Dimensions (hwd / in.) | 0.500 x 7.000 x 9.000 |
| Shipping Dimensions (hwd / cm) | 1.27 x 17.78 x 22.86 |
| Shipping Weight (lbs.) | 0.5000 |
| Shipping Weight (kg) | 0.23 |
| Color | White |
| ENVIRONMENTAL | |
| Operating Temperature Range | 32 TO 113 F (0 TO 45 C) |
| Storage Temperature Range | -40 TO 176 F (-40 TO 80 C) |
| Operating Humidity Range | 10 TO 85% RH |
| Storage Humidity Range | 5 TO 90% RH |
| CONNECTIONS | |
| Side A - Connector 1 | HDMI (MALE) |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|--------------------------------------|---------------------------|
| Side B - Connector 1 | HDMI (MALE) |
| FEATURES & SPECIFICATIONS | |
| HDMI Specification | 1.3 |
| HDCP Specification | 2.2 |
| WARRANTY | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>