Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

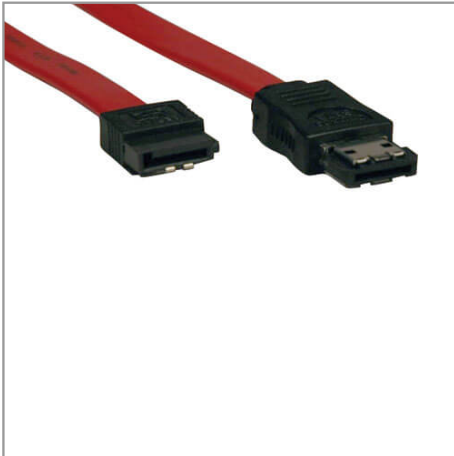Tel: +86-755-8981 8866 Fax: +86-755-8427 6832
Email & Skype: info@chipsmall.com Web: www.chipsmall.com
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

SATA to eSATA Transition Cable (7Pin/7Pin), 18-in.

MODEL NUMBER: **P952-18I**

Highlights

- SATA Internal "L" to External eSATA "I" Cable - 18 in.
- Supports data transfer rates of up to 6.0 Gbps
- Cable is shielded to protect against EMI/RFI line noise

Package Includes

- SATA to eSATA Transition Cable - 18 in.

Description

Tripp Lite's SATA to eSATA Transition Cable allows new eSATA devices to be connected to older style SATA ports. Cable is optimized for data storage with up to 6Gbps transfer rate.

Features

- SATA Internal "L" to External eSATA "I" Data Cable - 18 in.
- Supports data transfer rates up to 6Gbps
- Fully shielded cable to protect against EMI/RFI line noise

Specifications

OVERVIEW	
UPC Code	037332140630
Technology	SATA/eSATA

INPUT	
Cable Length (ft.)	1.5
Cable Length (m)	0.5
Cable Length (in.)	18
Cable Length (cm)	45.72

PHYSICAL	
Wire Gauge (AWG)	26

Shipping Dimensions (hwd / in.)	0.50 x 7.00 x 9.50
Shipping Dimensions (hwd / cm)	1.27 x 17.78 x 24.13
Shipping Weight (lbs.)	0.12
Shipping Weight (kg)	0.05
Color	Red
ENVIRONMENTAL	
Operating Temperature Range	0 ~ 40C (32F ~ 104F
Storage Temperature Range	-20 ~ 65C (-4F ~ 149F
Operating Humidity Range	20 to 80%
Storage Humidity Range	10 to 90%
CONNECTIONS	
Side A - Connector 1	7 PIN SATA (MALE)
Side B - Connector 1	7 PIN ESATA (MALE)
CERTIFICATIONS	
Certifications	ROHS
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty