



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Video Power Operational Amplifier

FEATURES

- VERY FAST SLEW RATE — 900 V/ μ s
- POWER MOS TECHNOLOGY — 4A peak rating
- LOW INTERNAL LOSSES — 0.75V at 2A
- PROTECTED OUTPUT STAGE — Thermal Shutoff
- WIDE SUPPLY RANGE — ± 15 V TO ± 40 V

APPLICATIONS

- VIDEO DISTRIBUTION AND AMPLIFICATION
- HIGH SPEED DEFLECTION CIRCUITS
- POWER TRANSDUCERS UP TO 5 MHz
- MODULATION OF RF POWER STAGES
- POWER LED OR LASER DIODE EXCITATION


DESCRIPTION

The PA119 is a high voltage, high current operational amplifier optimized to drive a variety of loads from DC through the video frequency range. Excellent input accuracy is achieved with a dual monolithic FET input transistor which is cascoded by two high voltage transistors to provide outstanding common mode characteristics. All internal current and voltage levels are referenced to a zener diode biased on by a current source. As a result, the PA119 exhibits superior DC and AC stability over a wide supply and temperature range.

High speed and freedom from second breakdown is assured by a complementary power MOS output stage. For optimum linearity, especially at low levels, the power MOS transistors are biased in a class A/B mode. Thermal shutoff provides full protection against overheating and limits the heatsink requirements to dissipate the internal power losses under normal operating conditions. A built-in current limit of 0.5A can be increased with the addition of two external resistors. Transient inductive load kickback protection is provided by two internal clamping diodes. External phase compensation allows the user maximum flexibility in obtaining the optimum slew rate and gain bandwidth product at all gain settings. A heatsink of proper rating is recommended.

This hybrid circuit utilizes thick film (cermet) resistors, ceramic capacitors, and silicon semiconductor chips to maximize reliability, minimize size, and give top performance. Ultrasonically bonded aluminum wires provide reliable interconnections at all operating temperatures. The 8-pin TO-3 package is hermetically sealed and electrically isolated. The use of compressible thermal washers and/or improper mounting torque will void the product warranty. Please see Application Note 1 "General Operating Considerations".

TYPICAL APPLICATION

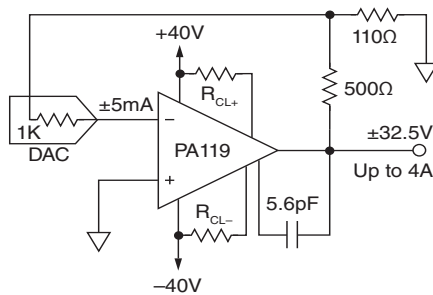

PA119 as a Fast Power Driver




8-pin TO-3
PACKAGE STYLE CE


TYPICAL APPLICATION

This fast power driver utilizes the 900V/ μ s slew rate of the PA119 and provides a unique interface with a current output DAC. By using the DAC's internal 1 k Ω feedback resistor, temperature drift errors are minimized, since the temperature drift coefficients of the internal current source and the internal feedback resistor of the DAC are closely matched. Gain of V_{OUT} to I_{IN} is $-6.5/ \text{mA}$. The DAC's internal 1k resistor together with the external 500 Ω and 110 Ω form a "tee network" in the feedback path around the PA119. This effective resistance equals 6.5 k Ω . Therefore the entire circuit can be modeled as 6.5k Ω feedback resistor from output to inverting input and a 5mA current source into the inverting input of the PA119. Now we see the familiar current to voltage conversion for a DAC where $V_{OUT} = -I_{IN} \times R_{FEEDBACK}$

EQUIVALENT SCHEMATIC

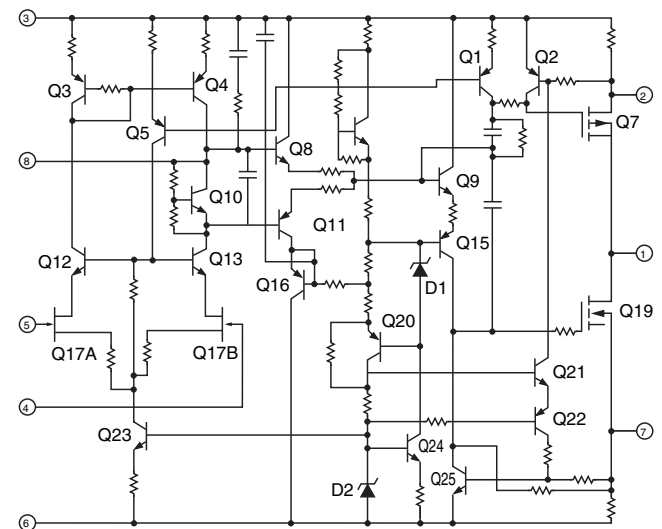

EXTERNAL CONNECTIONS

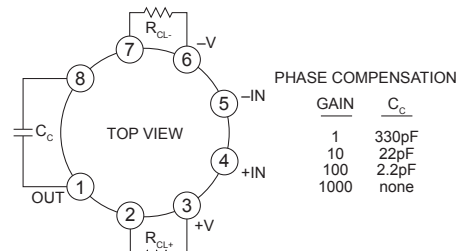

ABSOLUTE MAXIMUM RATINGS













| | |
|--|-----------------|
| SUPPLY VOLTAGE, +V _S to -V _S | 80V |
| OUTPUT CURRENT, within SOA | 5A |
| POWER DISSIPATION, internal | 75W |
| INPUT VOLTAGE, differential | 40V |
| INPUT VOLTAGE, common mode | ±V _S |
| TEMPERATURE, pin solder — 10 sec | 350°C |
| TEMPERATURE, junction ¹ | 175°C |
| TEMPERATURE, storage | -65 to 150°C |
| OPERATING TEMPERATURE RANGE, case | -55 to 125°C |

SPECIFICATIONS

| PARAMETER | TEST CONDITIONS ² | PA119 | | | PA119A | | | UNITS |
|---|--|---------------------|----------------------|------|--------|-------|-------|-------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| INPUT | | | | | | | | |
| OFFSET VOLTAGE, initial | T _C = 25°C | | ±0.5 | ±3 | | ±0.35 | ±0.75 | mV |
| OFFSET VOLTAGE, vs. temperature | T _C = 25°C to +85°C | | 10 | 30 | | 5 | 15 | μV/°C |
| OFFSET VOLTAGE, vs. supply | T _C = 25°C | | 10 | | | * | | μV/V |
| OFFSET VOLTAGE, vs. power | T _C = 25°C to +85°C | | 20 | | | * | | μV/W |
| BIAS CURRENT, initial | T _C = 25°C | | 10 | 200 | | 5 | 50 | pA |
| BIAS CURRENT, vs. supply | T _C = 25°C | | 0.01 | | | * | | pA/V |
| OFFSET CURRENT, initial | T _C = 25°C | | 5 | 100 | | 3 | 25 | pA |
| INPUT IMPEDANCE, DC | T _C = 25°C | | 10 ¹¹ | | | * | | MΩ |
| INPUT CAPACITANCE | T _C = 25°C | | 6 | | | * | | pF |
| COMMON MODE VOLTAGE RANGE ³ | T _C = 25°C to +85°C | ±V _S -15 | ±V _S -12 | | * | * | | V |
| COMMON MODE REJECTION, DC | T _C = 25°C to +85°C, V _{CM} = ±20V | 70 | 104 | | * | * | | dB |
| GAIN | | | | | | | | |
| OPEN LOOP GAIN at 10 Hz | T _C = 25°C, R _L = 1 kΩ | | 111 | | | * | | dB |
| OPEN LOOP GAIN at 10 Hz | T _C = 25°C, R _L = 15 Ω | 74 | 88 | | * | * | | dB |
| GAIN BANDWIDTH PRODUCT at 1 MHz | T _C = 25°C, C _C = 2.2pF | | 100 | | | * | | MHz |
| POWER BANDWIDTH, A _v = 100 | T _C = 25°C, C _C = 2.2pF | | 3.5 | | | * | | MHz |
| POWER BANDWIDTH, A _v = 1 | T _C = 25°C, C _C = 330pF | | 250 | | | * | | kHz |
| OUTPUT | | | | | | | | |
| VOLTAGE SWING ³ | T _C = 25°C, I _O = 4A | ±V _S -5 | ±V _S -1.5 | | * | * | | V |
| VOLTAGE SWING ³ | T _C = 25°C to +85°C, I _O = 2A | ±V _S -3 | ±V _S -75 | | * | * | | V |
| VOLTAGE SWING ³ | T _C = 25°C to +85°C, I _O = 78mA | ±V _S -1 | ±V _S -5 | | * | * | | V |
| SETTLING TIME to 0.1% | T _C = 25°C, 2V step | | 0.3 | | | * | | μs |
| SETTLING TIME to 0.01% | T _C = 25°C, 2V step | | 1.2 | | | * | | μs |
| SLEW RATE, A _v = 100 | T _C = 25°C, C _C = 2.2pF | 600 | 900 | | 750 | * | | V/μs |
| SLEW RATE, A _v = 10 | T _C = 25°C, C _C = 22pF | | 650 | | | * | | V/μs |
| POWER SUPPLY | | | | | | | | |
| VOLTAGE | T _C = 25°C to +85°C | ±15 | ±35 | ±40 | * | * | * | V |
| CURRENT, quiescent | T _C = 25°C | | 100 | 120 | | * | * | mA |
| THERMAL | | | | | | | | |
| RESISTANCE, AC, junction to case ⁴ | T _C = 25°C to +85°C, F > 60 Hz | | 1.46 | 1.64 | | * | * | °C/W |
| RESISTANCE, DC, junction to case | T _C = 25°C to +85°C, F < 60 Hz | | 1.84 | 2.0 | | * | * | °C/W |
| RESISTANCE, junction to air | T _C = 25°C to +85°C | | 30 | | | * | * | °C/W |
| TEMPERATURE RANGE, case | Meets full range specifications | -25 | | +85 | * | | * | °C |

- NOTES: * The specification of PA119A is identical to the specification for PA119 in applicable column to the left.
1. Long term operation at the maximum junction temperature will result in reduced product life. Derate internal power dissipation to achieve high MTTF.
 2. The power supply voltage for all specifications is the TYP rating unless noted as a test condition.
 3. +V_S and -V_S denote the positive and negative supply rail respectively. Total V_S is measured from +V_S to -V_S.
 4. Rating applies if the output current alternates between both output transistors at a rate faster than 60 Hz.

CAUTION The internal substrate contains beryllia (BeO). Do not break the seal. If accidentally broken, do not crush, machine, or subject to temperatures in excess of 850°C to avoid generating toxic fumes.

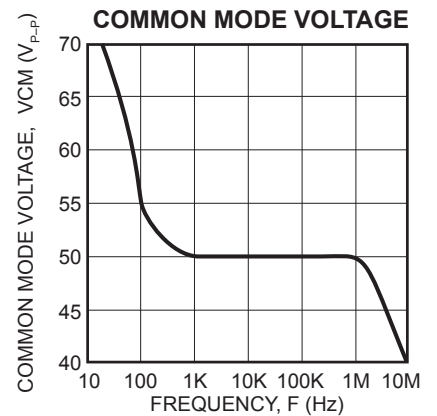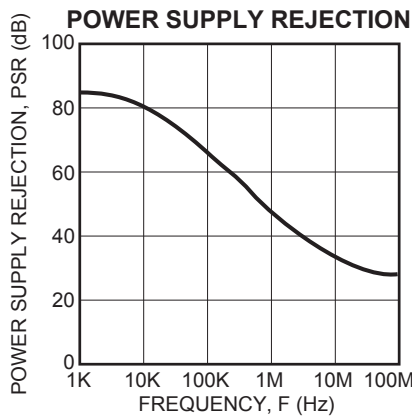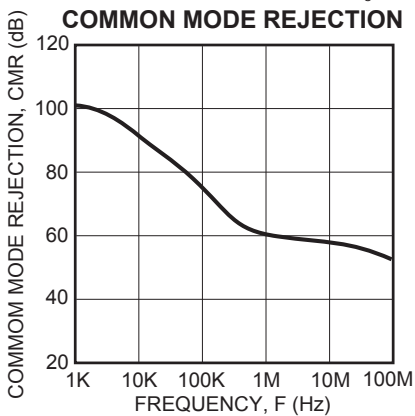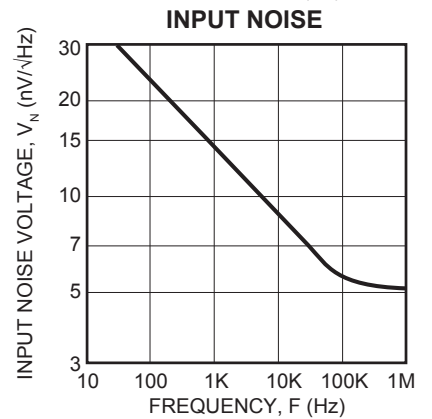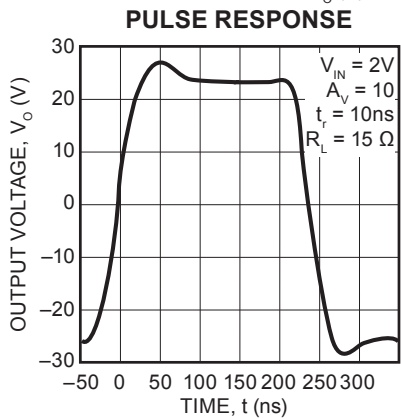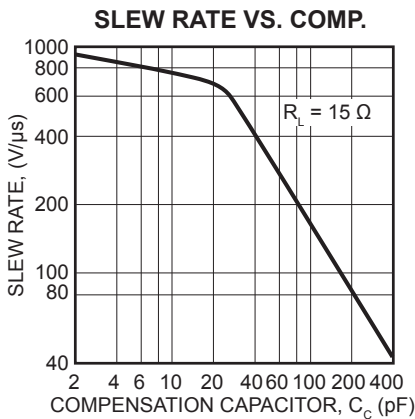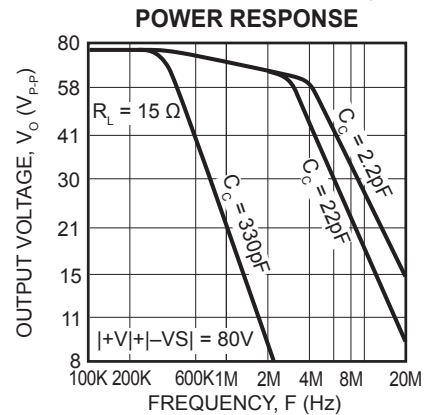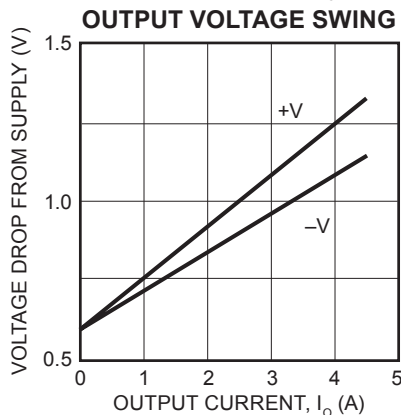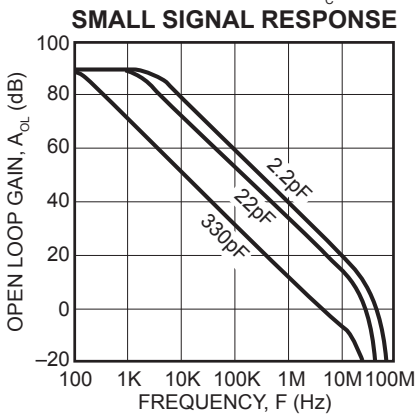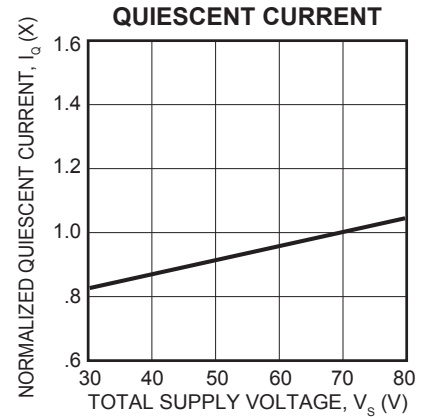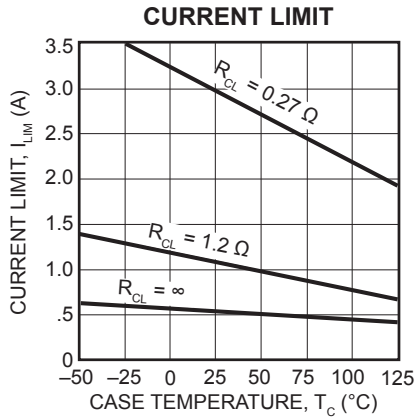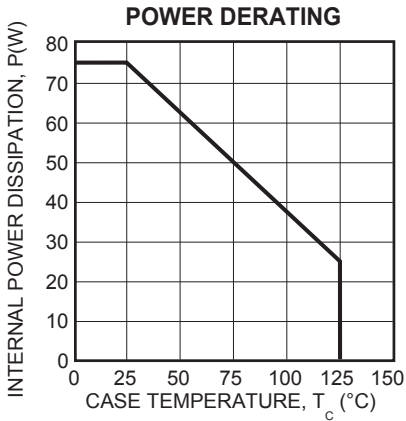

GENERAL

Please read Application Note 1 "General Operating Considerations" which covers stability, supplies, heat sinking, mounting, current limit, SOA interpretation, and specification interpretation. Visit www.apexanalog.com for Apex Microtechnology's complete Application Notes library, Technical Seminar Workbook, and Evaluation Kits.

CURRENT LIMIT

Q2 (and Q25) limit output current by turning on and removing gate drive when voltage on pin 2 (pin 7) exceeds 0.65V differential from the positive (negative) supply rail. With internal resistors equal to 1.2 Ω, current limits are approximately 0.5A with no external current limit resistors. With the addition of external resistors current limit will be:

To determine values of external current limit resistors:

PHASE COMPENSATION

$$I_{LIM} (A) = \frac{0.65V}{R_{CL} (\Omega)} + 0.54A$$


$$R_{CL} (\Omega) = \frac{0.65V}{I_{CL} (A) - 0.54A}$$

At low gain settings, an external compensation capacitor is required to insure stability. In addition to the resistive feedback network, roll off or integrating capacitors must also be considered when determining gain settings. The capacitance values listed in the external connection diagram, along with good high frequency layout practice, will insure stability. Interpolate values for intermediate gain settings.

SAFE OPERATING AREA (SOA)

The MOSFET output stage of this power operational amplifier has two distinct limitations:

1. The current handling capability of the MOSFET geometry and the wire bonds.

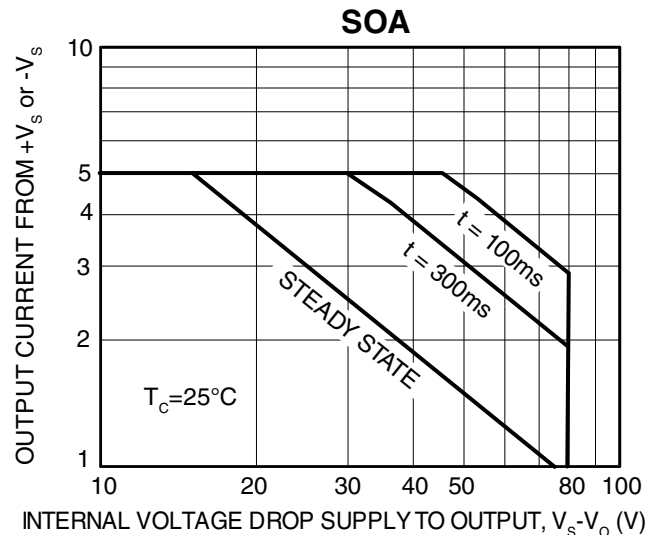

2. The junction temperature of the output MOSFETs.

The SOA curves combine the effect of these limits and allow for internal thermal delays. For a given application, the direction and magnitude of the output current should be calculated or measured and checked against the SOA curves. This is simple for resistive loads but more complex for reactive and EMF generating loads. The following guidelines may save extensive analytical efforts:

1. Capacitive and inductive loads up to the following maximums are safe:

| $\pm V_s$ | CAPACITIVE LOAD | INDUCTIVE LOAD |
|-----------|-----------------|----------------|
| 40V | 0.1μF | 11mH |
| 30V | 500μF | 24mH |
| 20V | 2500μF | 75mH |
| 15V | ∞ | 100mH |


2. Safe short circuit combinations of voltage and current are limited to a power level of 100W.
3. The output stage is protected against transient flyback. However, for protection against sustained, high energy flyback, external fast-recovery diodes should be used.

SUPPLY CURRENT

The PA119 features a class A/B driver stage to charge and discharge gate capacitance of Q7 and Q19. As these currents approach 0.5A, the savings of quiescent current over that of a class A driver stage is considerable. However, supply current drawn by the PA119, even with no load, varies with slew rate of the output signal as shown below.

OUTPUT LEADS

Keep the output leads as short as possible. In the video

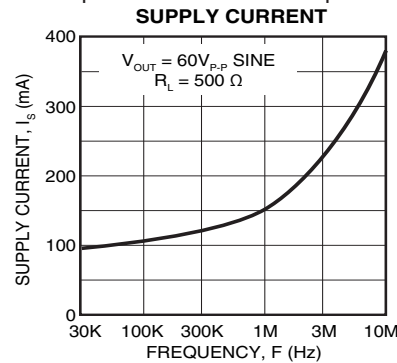

frequency range, even a few inches of wire have significant inductances, raising the interconnection impedance and limiting the output current slew rate. Furthermore, the skin effect increases the resistance of heavy wires at high frequencies. Multistrand Litz Wire is recommended to carry large video currents with low losses.

THERMAL SHUTDOWN

The thermal protection circuit shuts off the amplifier when

the substrate temperature exceeds approximately 150°C. This allows the heatsink selection to be based on normal operating conditions while protecting the amplifier against excessive junction temperature during temporary fault conditions.

Thermal protection is a fairly slow-acting circuit and therefore does not protect the amplifier against transient SOA violations (areas outside of the steady state boundary). It is designed to protect against short-term fault conditions that result in high power dissipation within the amplifier. If the conditions that cause thermal shutdown are not removed, the amplifier will oscillate in and out of shutdown. This will result in high peak power stresses, destroy signal integrity, and reduce the reliability of the device.

STABILITY

Due to its large bandwidth, the PA119 is more likely to

oscillate than lower bandwidth power operational amplifiers. To prevent oscillations a reasonable phase margin must be maintained by:

1. Selection of the proper phase compensation capacitor. Use the values given in the table under external connections and interpolate if necessary. The phase margin can be increased by using a larger capacitor at the expense of slew rate. Total physical length (pins of the PA119, capacitor leads plus printed circuit traces) should be limited to a maximum of 3.5 inches.
2. Keep the external sumpoint stray capacitance to ground at a minimum and the sumpoint load resistance (input and feedback resistors in parallel) below 500 Ω. Larger sumpoint load resistances can be used with increased phase compensation and/or by bypassing the feedback resistor.
3. Connect the case to any AC ground potential.

NEED TECHNICAL HELP? CONTACT APEX SUPPORT!

For all Apex Microtechnology product questions and inquiries, call toll free 800-546-2739 in North America.

For inquiries via email, please contact apex.support@apexanalog.com.

International customers can also request support by contacting their local Apex Microtechnology Sales Representative.

To find the one nearest to you, go to www.apexanalog.com

IMPORTANT NOTICE

Apex Microtechnology, Inc. has made every effort to insure the accuracy of the content contained in this document. However, the information is subject to change without notice and is provided "AS IS" without warranty of any kind (expressed or implied). Apex Microtechnology reserves the right to make changes without further notice to any specifications or products mentioned herein to improve reliability. This document is the property of Apex Microtechnology and by furnishing this information, Apex Microtechnology grants no license, expressed or implied under any patents, mask work rights, copyrights, trademarks, trade secrets or other intellectual property rights. Apex Microtechnology owns the copyrights associated with the information contained herein and gives consent for copies to be made of the information only for use within your organization with respect to Apex Microtechnology integrated circuits or other products of Apex Microtechnology. This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale.

APEX MICROTECHNOLOGY PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED TO BE SUITABLE FOR USE IN PRODUCTS USED FOR LIFE SUPPORT, AUTOMOTIVE SAFETY, SECURITY DEVICES, OR OTHER CRITICAL APPLICATIONS. PRODUCTS IN SUCH APPLICATIONS ARE UNDERSTOOD TO BE FULLY AT THE CUSTOMER OR THE CUSTOMER'S RISK.

Apex Microtechnology, Apex and Apex Precision Power are trademarks of Apex Microtechnology, Inc. All other corporate names noted herein may be trademarks of their respective holders.