



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Unshielded Drum Core Inductor

PA4306.XXXNL, PA4307.XXXNL & PA4308.XXXNL Series




- ⊕ **Height:** 3.1mm (PA4306), 3.5mm (PA4307) and 4.8mm (PA4310) Max
- ⊕ **Footprint:** 7.3 x 7.3 mm Max
- ⊕ **Current Rating:** 0.22A to 12A
- ⊕ **Inductance Range:** 1uH to 1000uH

## Electrical Specifications @ 25°C – Operating Temperature -40°C to 125°C

Pulse Part Number	Inductance (uH) <sup>1,2</sup>	Rated Current (A) Max <sup>3</sup>	DC Resistance (mΩ) Max	Package Size (mm)
PA4306.102NLT	1.0	5.9	33	7.3 x 7.3 x 3.1mm Max
PA4306.152NLT	1.5	5.7	35	
PA4306.222NLT	2.2	5	45	
PA4306.332NLT	3.3	4	60	
PA4306.472NLT	4.7	3.3	72	
PA4306.562NLT	5.6	3	85	
PA4306.682NLT	6.8	2.7	120	
PA4306.822NLT	8.2	2.4	130	
PA4306.103NLT	10	2.1	140	
PA4306.153NLT	15	1.8	208	
PA4306.223NLT	22	1.5	286	
PA4306.333NLT	33	1.2	470	
PA4306.473NLT	47	1	640	
PA4306.563NLT	56	0.95	810	
PA4306.683NLT	68	0.82	975	
PA4306.823NLT	82	0.8	1053	
PA4306.104NLT	100	0.75	1210	
PA4306.124NLT	120	0.63	1690	
PA4306.154NLT	150	0.6	1820	
PA4306.184NLT	180	0.52	2340	
PA4306.224NLT	220	0.44	2700	
PA4306.274NLT	270	0.42	4030	
PA4306.334NLT	330	0.4	4680	
PA4306.394NLT	390	0.36	5070	
PA4306.474NLT	470	0.35	5720	
PA4306.564NLT	560	0.3	6630	
PA4306.684NLT	680	0.28	8580	
PA4306.824NLT	820	0.25	11800	
PA4306.105NLT	1000	0.22	14950	

# Unshielded Drum Core Inductor


PA4306.XXXNL, PA4307.XXXNL & PA4308.XXXNL Series



Electrical Specifications @ 25°C – Operating Temperature -40°C to 125°C				
Pulse Part Number	Inductance (uH) <sup>12</sup>	Rated Current (A) Max <sup>3</sup>	DC Resistance (mΩ) Max	Package Size (mm)
PA4307.102NLT	1.0	7.5	30	7.3 x 7.3 x 3.5mm Max
PA4307.152NLT	1.5	7.3	38	
PA4307.222NLT	2.2	6.8	42	
PA4307.332NLT	3.3	5.4	60	
PA4307.472NLT	4.7	4.6	70	
PA4307.562NLT	5.6	4	85	
PA4307.682NLT	6.8	3.8	95	
PA4307.822NLT	8.2	3.4	130	
PA4307.103NLT	10	2.8	140	
PA4307.153NLT	15	2.5	285	
PA4307.223NLT	22	2	345	
PA4307.333NLT	33	1.8	425	
PA4307.473NLT	47	1.5	587	
PA4307.563NLT	56	1.3	610	
PA4307.683NLT	68	1.2	850	
PA4307.823NLT	82	1.1	1066	
PA4307.104NLT	100	1	1243	
PA4307.124NLT	120	0.9	1620	
PA4307.154NLT	150	0.8	1755	
PA4307.184NLT	180	0.75	2025	
PA4307.224NLT	220	0.63	2700	
PA4307.274NLT	270	0.6	2835	
PA4307.334NLT	330	0.55	3780	
PA4307.394NLT	390	0.5	4825	
PA4307.474NLT	470	0.44	5400	
PA4307.564NLT	560	0.4	7290	
PA4307.684NLT	680	0.35	9585	
PA4307.824NLT	820	0.32	10820	
PA4307.105NLT	1000	0.3	12295	

# Unshielded Drum Core Inductor

PA4306.XXXNL, PA4307.XXXNL & PA4308.XXXNL Series



Electrical Specifications @ 25°C – Operating Temperature -40°C to 125°C				
Pulse Part Number	Inductance (uH) <sup>1,2</sup>	Rated Current (A) Max <sup>3</sup>	DC Resistance (mΩ) Max	Package Size (mm)
PA4308.102NLT	1.0	12	35	7.3 x 7.3 x 4.8mm Max
PA4308.152NLT	1.5	11	38	
PA4308.222NLT	2.2	9	42	
PA4308.332NLT	3.3	7.5	50	
PA4308.472NLT	4.7	6	65	
PA4308.562NLT	5.6	5.5	70	
PA4308.682NLT	6.8	5.2	84	
PA4308.822NLT	8.2	4.8	97	
PA4308.103NLT	10	4.3	125	
PA4308.153NLT	15	3.4	158	
PA4308.223NLT	22	2.9	225	
PA4308.333NLT	33	2.3	358	
PA4308.473NLT	47	1.9	486	
PA4308.563NLT	56	1.75	545	
PA4308.683NLT	68	1.6	660	
PA4308.823NLT	82	1.4	885	
PA4308.104NLT	100	1.3	1120	
PA4308.124NLT	120	1.23	1485	
PA4308.154NLT	150	1.1	1647	
PA4308.184NLT	180	1	1863	
PA4308.224NLT	220	0.92	2450	
PA4308.274NLT	270	0.8	2995	
PA4308.334NLT	330	0.7	3888	
PA4308.394NLT	390	0.65	4250	
PA4308.474NLT	470	0.57	5610	
PA4308.564NLT	560	0.53	7830	
PA4308.684NLT	680	0.48	10760	
PA4308.824NLT	820	0.42	12217	
PA4308.105NLT	1000	0.36	17550	

**NOTES:**

- Inductance tolerance is +/-30% for inductance values between 1uH and 8.2uH and +/-20% for values between 10uH and 680uH.
- Inductance is measured at 100kHz, 250mV
- The rated current as listed is the rms or heating current that the part can withstand with acceptable temperature rise in typical applications. At the listed current the inductance typically drops to 85%-90% of the no load value when measured at 25°C. The inductance is guaranteed to be greater than 65% of the no load inductance value when measured at 25°C.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature.
- Parts come in tape and reel packaging. Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=16mm) and pitch (P=12mm).


# Unshielded Drum Core Inductor

PA4306.XXXNL, PA4307.XXXNL & PA4308.XXXNL Series



## Mechanical

### PA43XX.XXXNLT

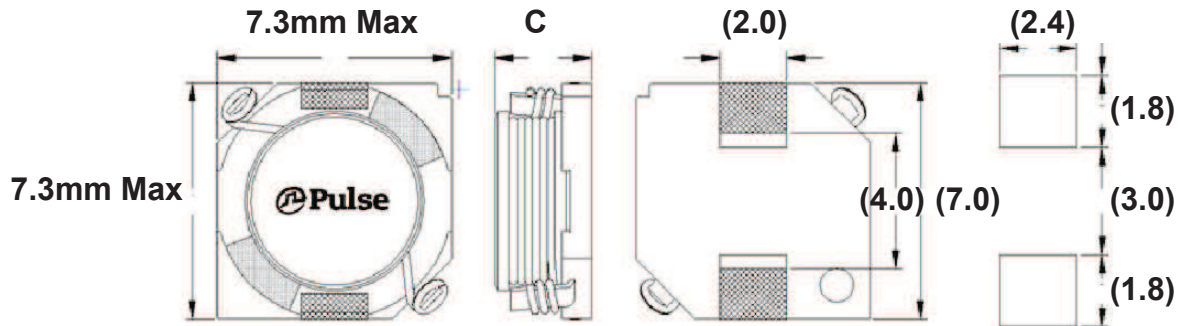

PA4306.XXXNLT - C Dimension is 3.1mm Max  
 PA4307.XXXNLT - C Dimension is 3.5mm Max  
 PA4308.XXXNLT - C Dimension is 4.8mm Max

**Weight** .....0.266 grams (PA4306)  
 .....0.314 grams (PA4307)  
 .....0.44 grams (PA4308)  
**Tape & Reel** .....1000/reel

## For More Information

### Pulse Worldwide Headquarters

12220 World Trade Drive  
 San Diego, CA 92128  
 U.S.A.

Tel: 858 674 8100  
 Fax: 858 674 8262

### Pulse Europe

Zeppelinstrasse 15  
 71083 Herrenberg  
 Germany

Tel: 49 7032 7806 0  
 Fax: 49 7032 7806 12

### Pulse China Headquarters

B402, Shenzhen Academy of  
 Aerospace Technology Bldg.  
 10th Kejinan Road  
 High-Tech Zone  
 Nanshan District  
 Shenzhen, PR China 518057

Tel: 86 755 33966678  
 Fax: 86 755 33966700

### Pulse North China

Room 2704/2705  
 Super Ocean Finance Ctr.  
 2067 Yan An Road West  
 Shanghai 200336  
 China

Tel: 86 21 62787060  
 Fax: 86 2162786973

### Pulse South Asia

135 Joo Seng Road  
 #03-02  
 PM Industrial Bldg.  
 Singapore 368363

Tel: 65 6287 8998  
 Fax: 65 6287 8998

### Pulse North Asia

3F, No. 198  
 Zhongyuan Road  
 Zhongli City  
 Taoyuan County 320  
 Taiwan R. O. C.

Tel: 886 3 4356768  
 Fax: 886 3 4356823 (Pulse)  
 Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2015. Pulse Electronics, Inc. All rights reserved.