



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com








Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series



-  Height: 1.5mm Max
-  Footprint: 3.8mm x 3.7mm Max
-  Current Rating: up to 5.5A
-  Inductance Range: 0.47uH to 10.0uH
-  High current, low DCR, and high efficiency
-  High reliability
-  Minimized acoustic noise and minimized leakage flux noise

Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C

Part Number	Inductance 100KHz, 1.0V	Rated Current	DC Resistance		Saturation Current
			MAX.	TYP.	
	uH±20%	A	mΩ	mΩ	A
PA4547.471NLT	0.47	5.50	28	23.3	8.0
PA4547.561NLT	0.56	5.00	33	28	7.2
PA4547.681NLT	0.68	4.50	42	34	6.5
PA4547.102NLT	1.00	3.60	50	41	5.8
PA4547.152NLT	1.50	3.40	77	64	4.0
PA4547.222NLT	2.20	3.20	98	82	3.8
PA4547.332NLT	3.30	2.50	205	170	3.2
PA4547.472NLT	4.70	1.90	264	220	2.8
PA4547.562NLT	5.60	1.70	318	265	2.3
PA4547.682NLT	6.80	1.50	348	290	2.0
PA4547.822NLT	8.20	1.30	468	390	1.8
PA4547.103NLT	10.00	1.20	522	435	1.6

# SMT Power Inductor


High Current Molded Power Inductor - PA4547.XXXNLT Series

## Notes:

1. Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
2. The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
3. The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
4. The part temperature (ambient+temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

## Mechanical


PA4547.XXXNLT

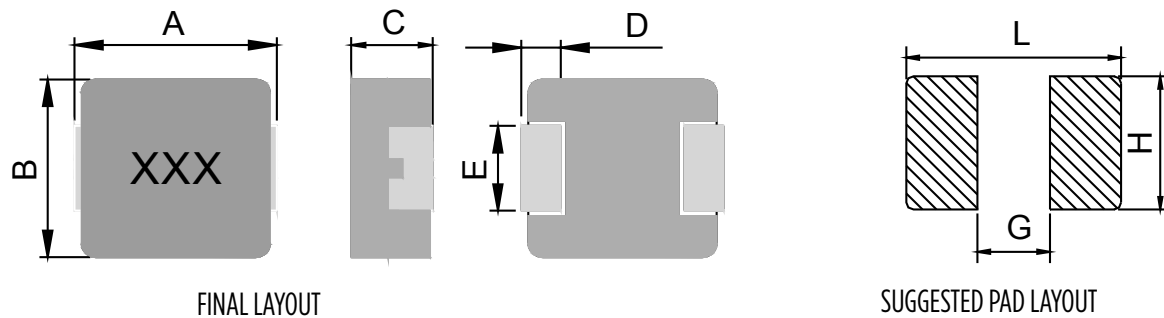

Series	A	B	C	D	E	L	G	H
PA4547.XXXNLT	3.5±0.3	3.2±0.2	1.3±0.2	0.7±0.2	1.2±0.2	4.1	1.9	1.45

All Dimensions in mm.

## TAPE & REEL INFO

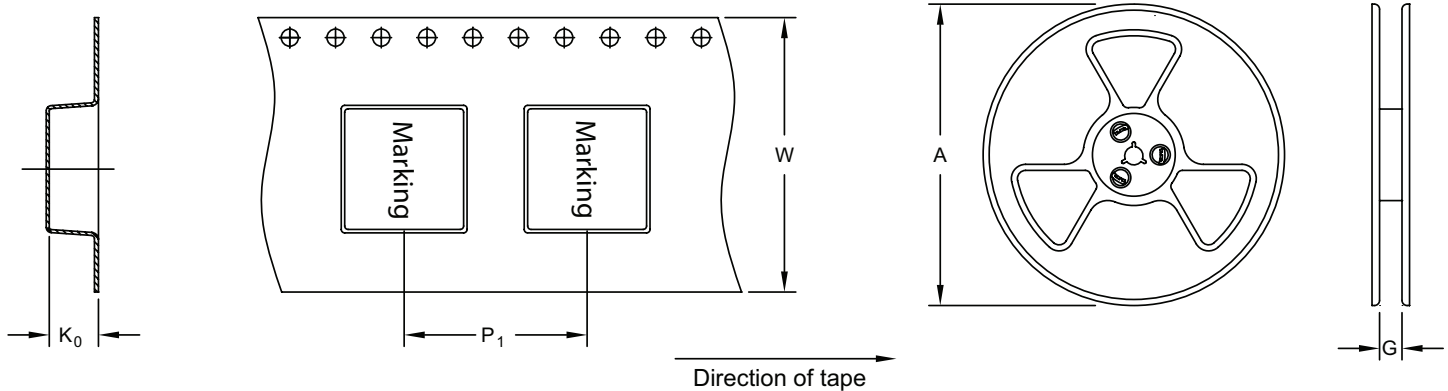







SURFACE MOUNTING TYPE, REEL/TAPE LIST						
	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P <sub>1</sub>	W	K <sub>0</sub>	PCS/REEL
PA4547.XXXNLT	Ø330	12.4	8	12	1.8	3000

# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series









## Typical Performance Curves

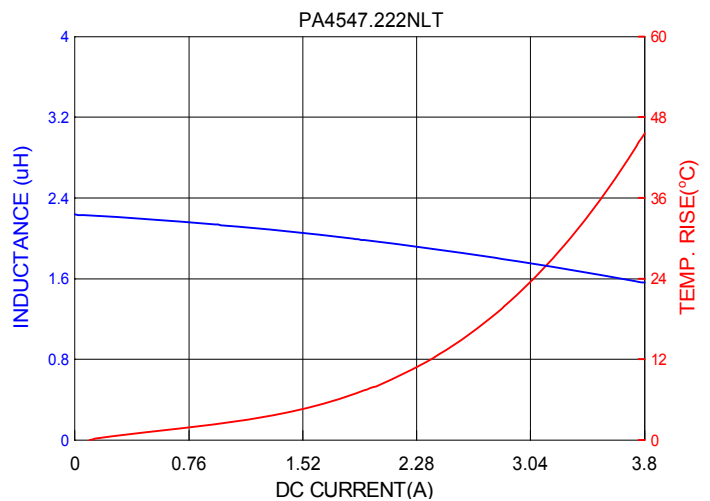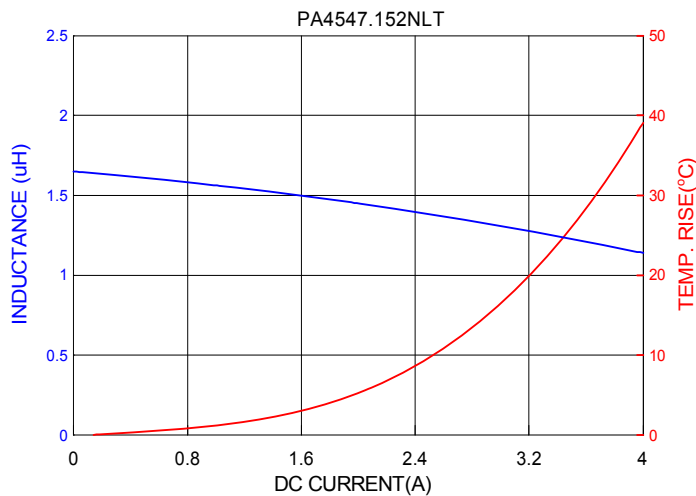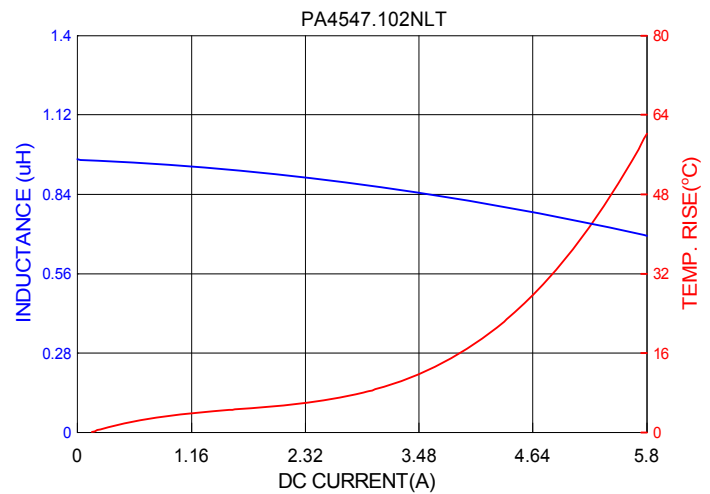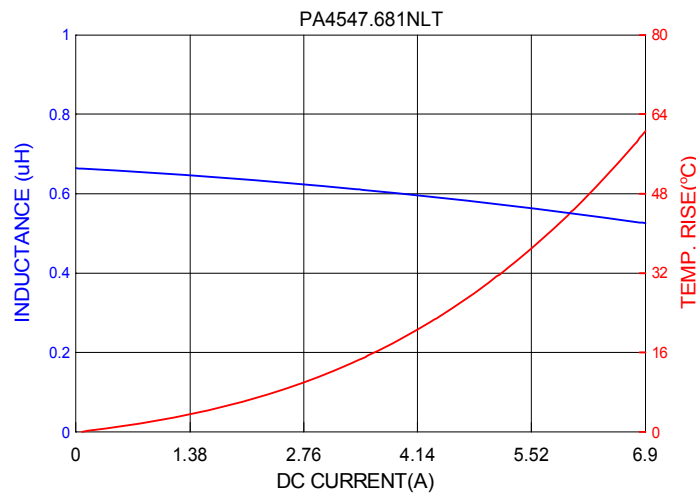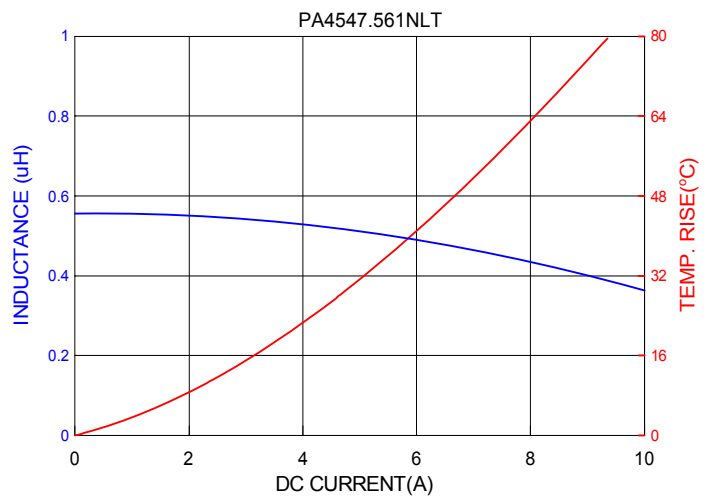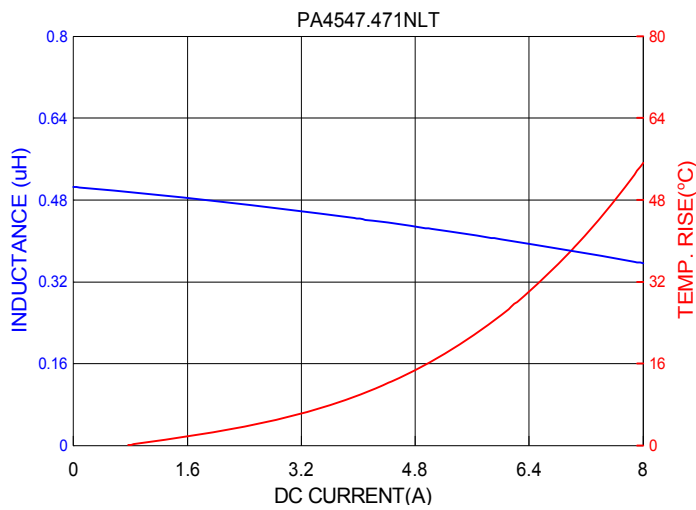

# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series

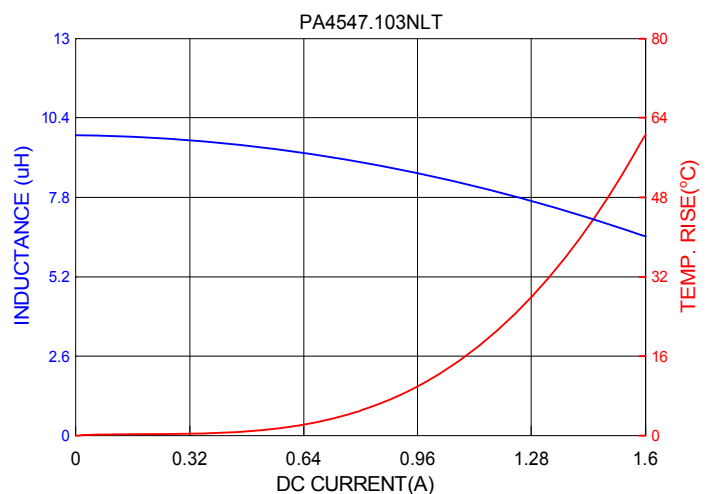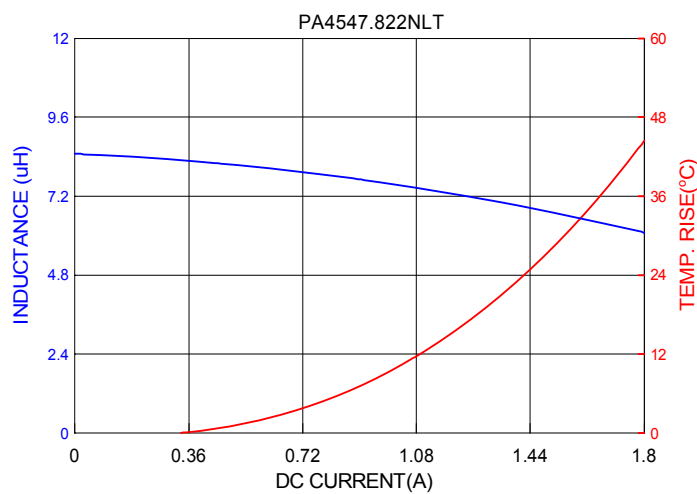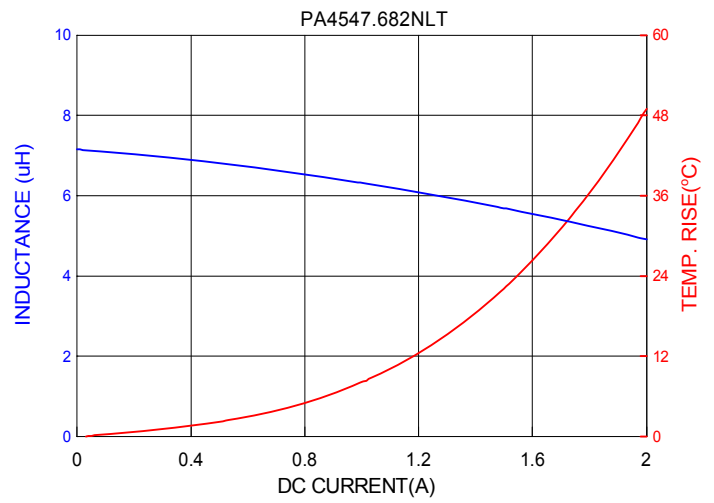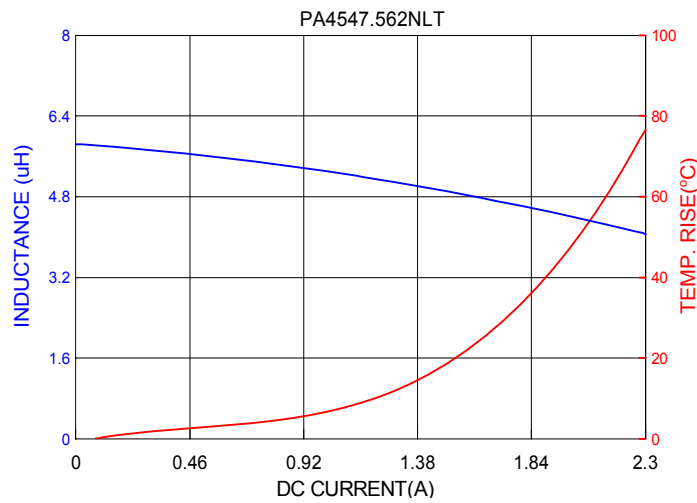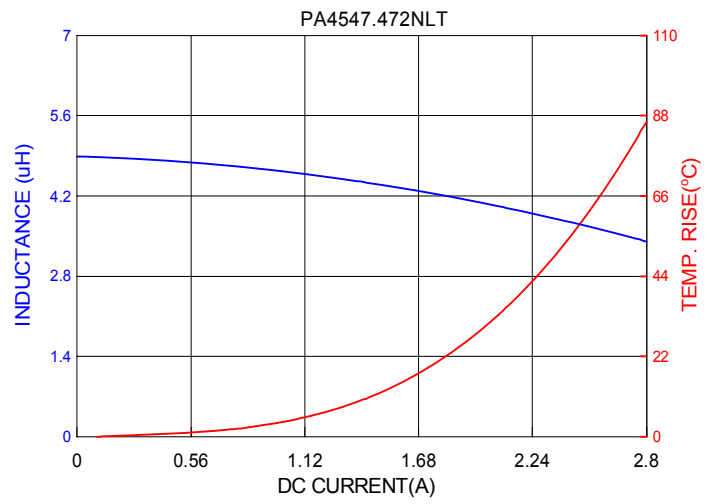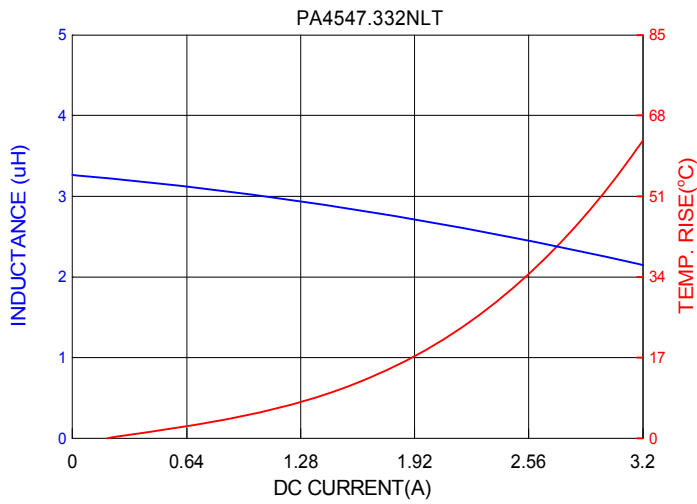

# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series



---

## For More Information

### Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100  
San Diego, CA 92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

### Pulse Europe

Pulse Electronics GmbH  
Am Rottland 12  
58540 Meinerzhagen  
Germany

Tel: 49 2354 777 100  
Fax: 49 2354 777 168

### Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD  
D708, Shenzhen Academy of  
Aerospace Technology,  
The 10th Keji South Road,  
Nanshan District, Shenzhen,  
P.R. China 518057

Tel: 86 755 33966678  
Fax: 86 755 33966700

### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

### Pulse South Asia

135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6280 0080

### Pulse North Asia

1F., No.111 Xiyuan Rd  
Zhongli City  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 886 3 4356768  
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2017. Pulse Electronics, Inc. All rights reserved.