

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








High Current Molded Power Inductor - PA4548.XXXNLT Series







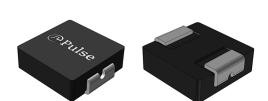

Height: 2.4mm Max

Footprint: 7.3mm x 6.9mm MaxCurrent Rating: up to 18.0A

Inductance Range: 0.22uH to 22.0uHHigh current, low DCR, and high efficiency

High reliability

Minimized acoustic noise and minimized leakage flux noise

Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C								
Part	Inductance	Rated Current		DC Resistance		Saturation Current		
Number	100KHz, 1.0V	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	
	<b>uH±</b> 20%	A	A	mΩ	mΩ	A	A	
PA4548.221NLT	0.22	18.0	21.0	3.2	2.0	31.0	34.0	
PA4548.331NLT	0.33	15.0	18.0	4.4	3.6	28.0	30.0	
PA4548.471NLT	0.47	13.0	15.0	5.1	4.8	23.0	26.0	
PA4548.561NLT	0.56	11.0	13.0	6.5	5.5	22.0	24.0	
PA4548.681NLT	0.68	11.0	13.0	7.2	6.4	19.0	21.0	
PA4548.821NLT	0.82	9.0	11.0	9.5	8.0	15.5	17.0	
PA4548.102NLT	1.00	9.0	11.0	13.5	10.5	14.5	16.0	
PA4548.152NLT	1.50	7.5	9.0	20.0	17.0	13.5	15.0	
PA4548.222NLT	2.20	6.0	7.0	28.0	23.0	12.0	14.0	
PA4548.332NLT	3.30	5.0	6.0	39.0	34.0	9.0	10.0	
PA4548.472NLT	4.70	4.6	5.5	50.0	41.0	8.0	9.0	
PA4548.562NLT	5.60	4.2	5.0	62.0	56.0	7.0	8.0	
PA4548.682NLT	6.80	3.4	4.0	72.0	65.0	6.0	7.0	
PA4548.822NLT	8.20	3.0	3.6	95.0	81.0	5.0	6.0	
PA4548.103NLT	10.00	2.7	3.2	101.0	92.0	4.0	5.0	
PA4548.153NLT	15.00	2.1	2.5	180.0	150.0	3.0	3.5	
PA4548.223NLT	22.00	1.4	1.8	215.0	185.0	2.5	3.0	

High Current Molded Power Inductor - PA4548.XXXNLT Series




#### Notes:


- 1. Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the compnent in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- 3. The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performanc varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.

4. The part temperature (ambient+temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

#### **Mechanical**

#### PA4548.XXXNLT

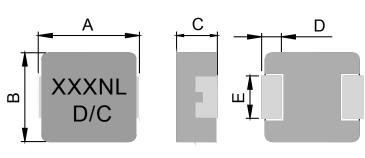




FINAL LAYOUT


E L G H


PA45	48.XXXNLT	7.0±0.3	6.6±0.3	2.2±0.2	1.8±0.3	3.0±0.3	7.7	2.5	3.5


All Dimensions in mm.





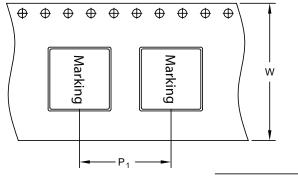






Di	irection	of	tape

SURFACE MOUNTING TYPE, REEL/TAPE LIST								
REEL SIZE (mm) TAPE SIZE (mm)								
	А	G	P <sub>1</sub>	W	K <sub>0</sub>	PCS/REEL		
PA4548.XXXNLT	<b>Ø</b> 3330	16.4	12	16	2.7	1500		

High Current Molded Power Inductor - PA4548.XXXNLT Series




#### **Typical Performance Curves**

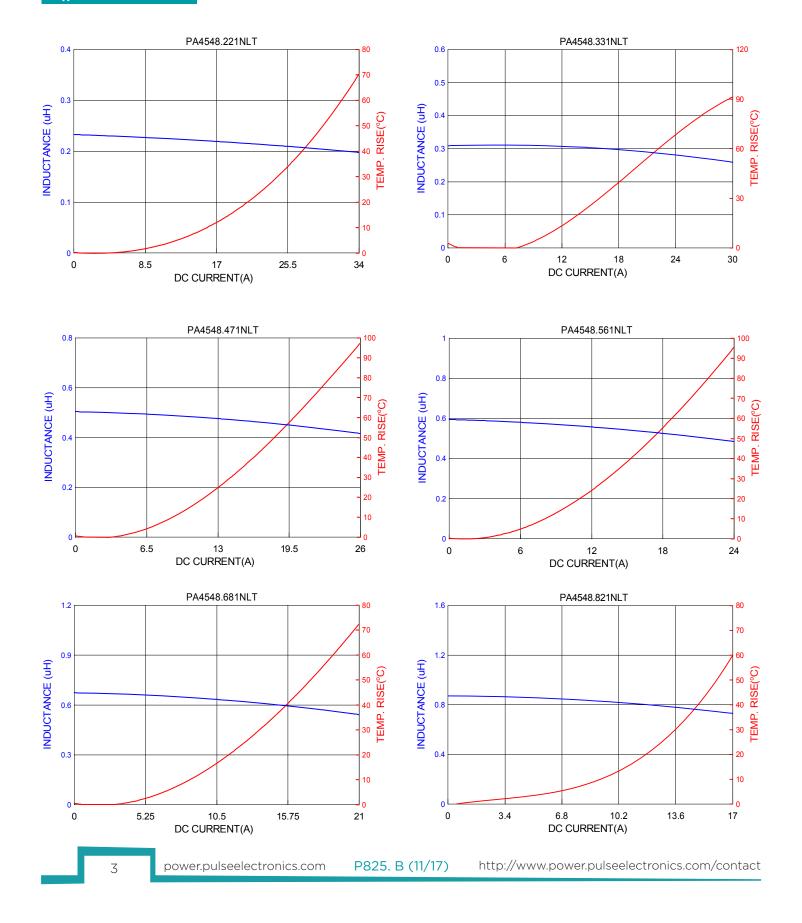


High Current Molded Power Inductor - PA4548.XXXNLT Series




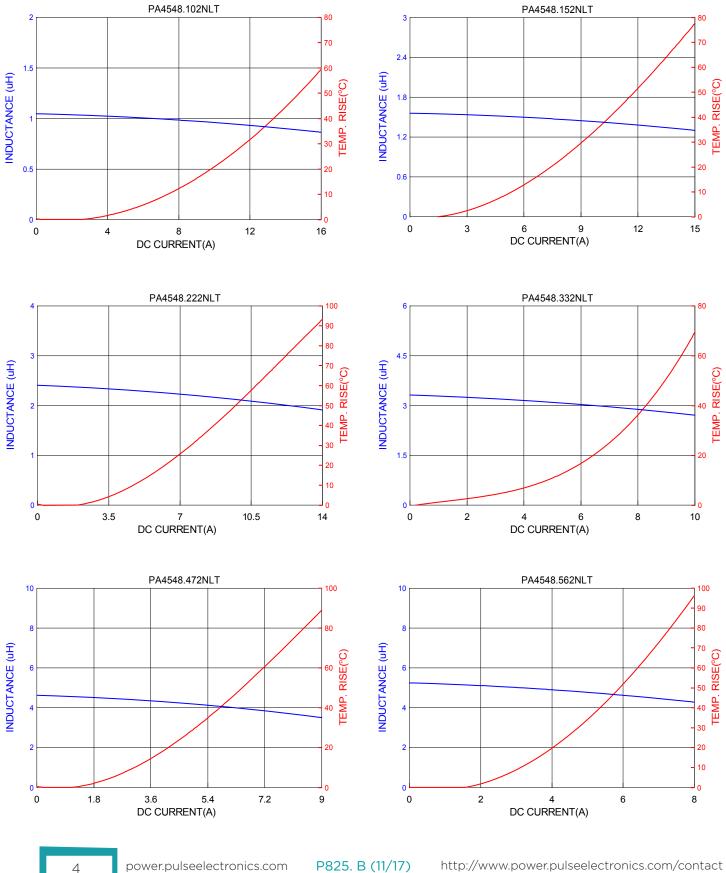



High Current Molded Power Inductor - PA4548.XXXNLT Series




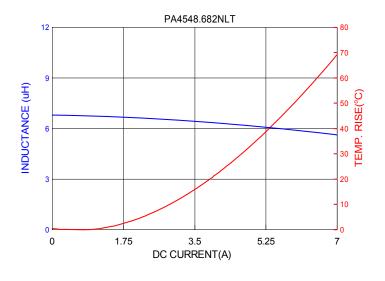

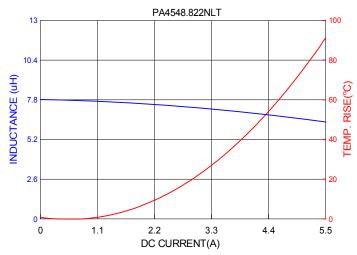

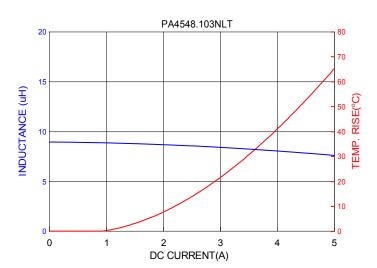

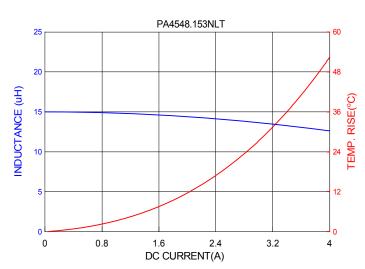

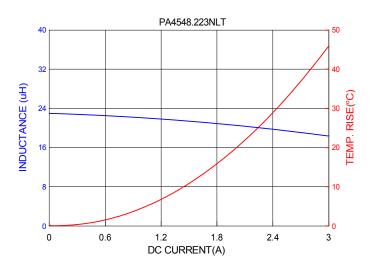

High Current Molded Power Inductor - PA4548.XXXNLT Series



For More Information									
Pulse Worldwide Headquarters 15255 Innovation Drive Ste 100 San Diego, CA 92128 U.S.A.	Pulse Europe Pulse Electronics GmbH Am Rottland 12 58540 Meinerzhagen Germany	Pulse China Headquarters Pulse Electronics (ShenZhen) CO., LTD D708, Shenzhen Academy of Aerospace Technology, The 10th Keji South Road, Nanshan District, Shenzhen, P.R. China 518057	Pulse North China Room 2704/2705 Super Ocean Finance Ctr. 2067 Yan An Road West Shanghai 200336 China	Pulse South Asia 135 Joo Seng Road #03-02 PM Industrial Bldg. Singapore 368363	Pulse North Asia 1F., No.111 Xiyuan Rd Zhongli City Taoyuan City 32057 Taiwan (R.O.C)				
Tel: 858 674 8100 Fax: 858 674 8262	Tel: 49 2354 777 100 Fax: 49 2354 777 168	Tel: 86 755 33966678 Fax: 86 755 33966700	Tel: 86 21 62787060 Fax: 86 2162786973	Tel: 65 6287 8998 Fax: 65 6280 0080	Tel: 886 3 4356768 Fax: 886 3 4356820				

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2017. Pulse Electronics, Inc. All rights reserved.

P825. B (11/17)