



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Smart Technology. Delivered.

PAL902010

Circular Polarity RFID Panel Antenna



Patent Pending
PAL902010



HDMNT
Heavy Duty Mount

902-928 MHz 9.5 dBic CIRCULAR POLARITY PANEL

The Laird PAL902010 antenna is a circular polarized panel antenna that provides reception and transmission of signals in the 902-928 MHz frequency band. Laird's industry-renowned design methodology achieves maximum efficiency and performance across the entire frequency band.

Both VSWR and efficiency are excellent and allow the user to achieve the maximum performance for an antenna of this type. The antenna is housed in a heavy duty radome enclosure that can be directly wall mounted. An optional articulating mount allows either wall or mast mounting. The antenna is offered with an integrated fixed connector.

FEATURES

- Low profile enables installation flexibility.
- High gain ensures maximum performance.
- Extremely low VSWR delivers maximum radiation.
- IP67 enclosure ensures rugged reliability.

APPLICATIONS

- Warehouse / Distribution Center
- Airports & Hospitals
- Transit Terminals
- Package / Material Handling Conveyers

SPECIFICATIONS	
Model	PAL902010-FNF
Frequency Bands, MHz	902-928
Peak Gain, dBic (Avg)	9.5
Peak Gain, dBic (Max)	9.6
VSWR, Avg	<1.3:1
Nominal Impedance	50Ω
Polarization	Left Hand Circular
Phi = 0° Co-Polar Beamwidth	60°
Phi = 90° Co-Polar Beamwidth	62°
Front-to-Back Ratio	16.9 dB
Axial Ratio, Typ	1.3:1 dB
Max Power (Ambient 25°C)	50 Watts
Antenna Dimension (LxWxH)	304.8 x 304.8 x 33.5 mm (12" x 12" x 1.32")
Weight	1.1 kg (2.4 lbs)
Antenna Color	White
Radome	ABS, UV Stable, UL-94-HB Material
Wind Operational	160 km/h (100 mph)
Wind Survival	219 km/h (136 mph)
Operating Temperature	-40°C to +70°C
Storage Temperature	-40°C to +85°C
Ingression Protection	IP67
Material Substance Compliance	RoHS

ORDERING GUIDE

PART NUMBER	CABLE LENGTH	CONNECTOR
PAL902010-FNF	N/A	Fixed N-Female


ALTERNATE MOUNTING KITS

PART NUMBER	TYPE	MATERIAL
HDMNT	Articulating	Die Cast


Americas: +1.847 839.6925
IAS-AmericasSales@lairdtech.com
Europe: +44.1628.858941
IAS-EUSales@lairdtech.com
Asia: IAS-AsiaSales@lairdtech.com
Middle East and Africa: +44.1628.858941
IAS-MEASales@lairdtech.com
www.lairdtech.com

RADIATION PATTERNS


902 MHz

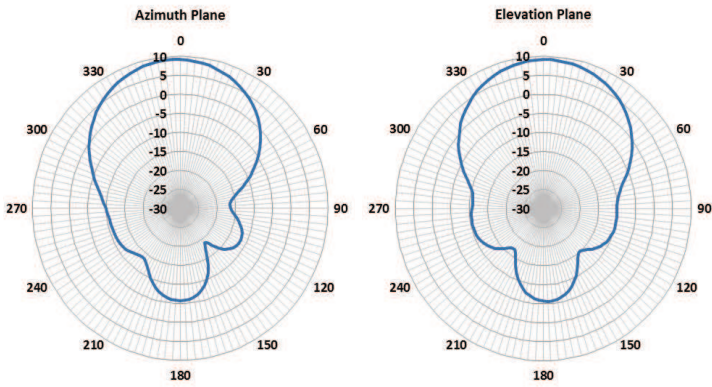

915 MHz

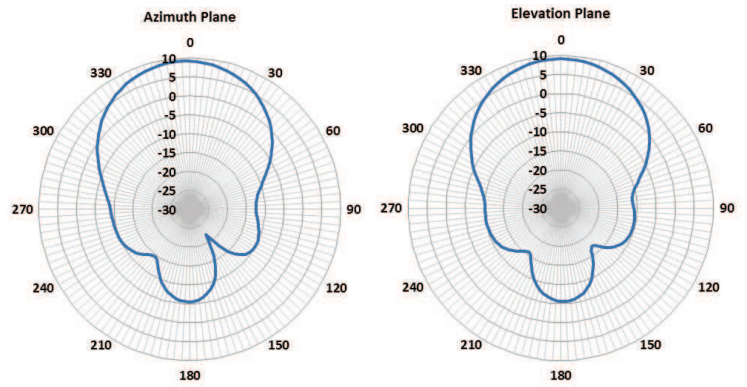

928 MHz

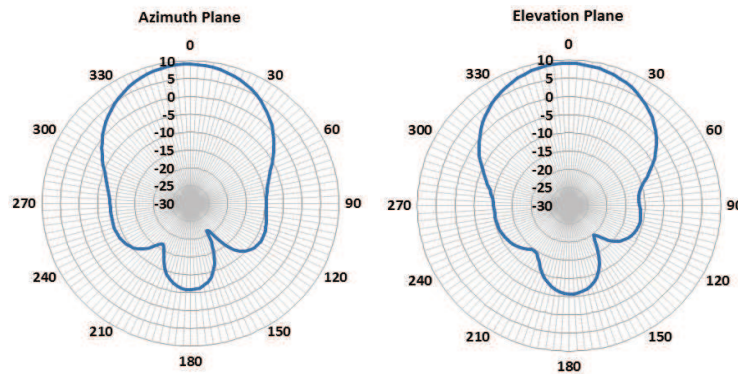

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective by reason of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.



ANT-DS-PAL902010 0217

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2017 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.