



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





AMETHERM

Circuit Protection Thermistors

ACCURATE AND CUSTOMIZABLE NTC THERMISTORS

For temperature control, sensing and compensation

800-808-2434 • www.ametherm.com



Precision.

TEMPERATURE SENSING, COMPENSATION AND CONTROL WITH AMETHERM NTC THERMISTORS

Ametherm NTC thermistors are manufactured from a specially-formulated metal oxide ceramic material that is extremely accurate in sensing temperature. Same high quality material is used in wide variety of housings and leaded parts for various applications such as:

HVAC • Refrigeration • Floor Heating • Surface Temperature Measurement • Corrosive Environments

PART NUMBERING SYSTEM

P	A	N	E	1	0	3	3	9	5	J	X	X	X
PART LETTERING		PROBE ASSEMBLY	PART LETTERING	LEADED NTC		R ₂₅		B _{0/50}		R ₂₅ TOLERANCE		CUSTOM PART	
PANE	Epoxy	NT03	Disc (3mm dia)	202	20x10 ² = 2 KΩ		350	3500°K		None	10%		
PANR	Ring Lug	NT05	Disc (5mm dia)	103	10x10 ³ = 10 KΩ		375	3750°K		J	5%		
PANH	Steel Tube	CT02	Chip (2mm width)	253	25x10 ³ = 25 KΩ		395	3950°K		H	3%		
PANT	Threaded			254	25x10 ⁴ = 250 KΩ		410	4110°K		G	2%		
PANW	Threaded with tip						450	4500°K		F	1%		

PANE Series - Probe Assembly / Epoxy

DESCRIPTION

- Epoxy dip coated NTC thermistor, soldered between jacketed Teflon / PVC wires

FEATURES

- Fast response, with high accuracy (to ±1%) for temperature sensing
- Small dimensions allow easy installation
- Point or Curve matched
- Customizable for your needs
- Cost effective

APPLICATIONS

- Motors
- Air Sensors / HVAC
- Transformers
- Heat Sinks
- Automotive



ELECTRICAL SPECS

PANE Part Number	R ₂₅ KΩ	R-T Curve	Beta (K)	Dissipation Constant (mW/°C)	Thermal Time Constant (sec)	Max Power (mW)
PANE501350	0.5	M	3500	3.0	10.0	125
PANE102350	1.0	M	3500	3.0	10.0	125
PANE202395	2.0	L	3950	3.0	10.0	125
PANE302395	3.0	L	3950	3.0	10.0	125
PANE502395	5.0	L	3950	3.0	10.0	125
PANE103395	10.0	L	3950	3.0	10.0	125
PANE253410	25.0	R	4111	3.0	10.0	125
PANE503410	50.0	R	4111	3.0	10.0	125
PANE104450	100.0	S	4500	3.0	10.0	125
PANE254450	250.0	S	4500	3.0	10.0	125

MECHANICAL SPECS

Letter / Dimensions	Std. Part (mm)
A / Dia. of part	3.0 ± 0.5
B / Length of tip	5.5 ± 0.5
C / Length of leads	152.4 ± 7.0
d / Length of strip	5.0 ± 0.5
28AWG Teflon wire	
-55°C – 150°C Operating Temp	



PANR Series - Probe Assembly / Ring Lug

DESCRIPTION

- Epoxy coated NTC thermistor, potted in tinned copper ring lug

FEATURES

- Ideal for surface temperature sensing
- Rugged
- Point or Curve matched
- Customizable for your needs
- Cost effective

APPLICATIONS

- Surface Temperature Sensing
- Heat Sinks
- Pipes
- Refrigeration




ELECTRICAL SPECS

PANR Part Number	R ₂₅ KΩ	R-T Curve	Beta (K)	Dissipation Constant (mW/°C)	Thermal Time Constant (sec)	Max Power (mW)
PANR501350	0.5	M	3500	3.0	40	125
PANR102350	1.0	M	3500	3.0	40	125
PANR202395	2.0	L	3950	3.0	40	125
PANR302395	3.0	L	3950	3.0	40	125
PANR502395	5.0	L	3950	3.0	40	125
PANR103395	10.0	L	3950	3.0	40	125
PANR253410	25.0	R	4111	3.0	40	125
PANR503410	50.0	R	4111	3.0	40	125
PANR104450	100.0	S	4500	3.0	40	125
PANR254450	250.0	S	4500	3.0	40	125

MECHANICAL SPECS

Letter / Dimensions	Std. Part (mm)
A1 / Outer Dia. of lug	9.5 ± 0.3
A2 / Inner Dia. of lug	4.4 ± 0.3
B / Length of lug	18.6 ± 0.5
C / Length of leads	152.4 ± 7.0
d / Length of strip	5.0 ± 0.5
E / Thickness of Lug	1.0 ± 0.2
F / Outer Dia. of barrel	5.5 ± 0.2
G / Length of barrel	6.5 ± 0.3
28AWG Teflon wire / #6 Lug	
-55°C – 150°C Operating Temp	

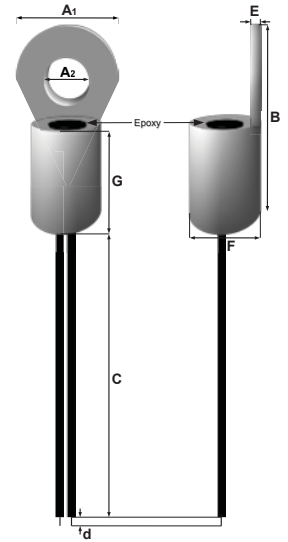

PANH Series - Probe Assembly / closed end metal tubing

DESCRIPTION


- NTC thermistor inside durable stainless steel alloy tube, epoxy filled

FEATURES

- Environmental protection
- Humidity resistant
- Fast response, with high accuracy (to ± 1%) for temperature sensing
- Rugged construction
- Cost effective

APPLICATIONS

- Floor Heating
- HVAC
- Industrial
- Evaporator
- Refrigeration

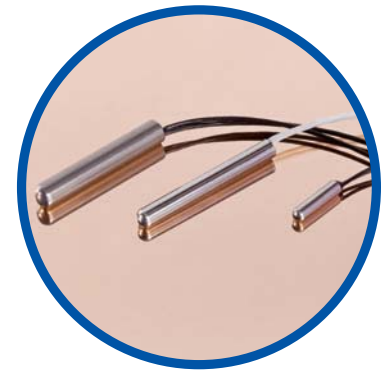


ELECTRICAL SPECS

PANH Part Number	R ₂₅ KΩ	R-T Curve	Beta (K)	Dissipation Constant (mW/°C)	Thermal Time Constant (sec)	Max Power (mW)
PANH501350	0.5	M	3500	5.0-10.0	10.0	125
PANH102350	1.0	M	3500	5.0-10.0	10.0	125
PANH202395	2.0	L	3950	5.0-10.0	10.0	125
PANH302395	3.0	L	3950	5.0-10.0	10.0	125
PANH502395	5.0	L	3950	5.0-10.0	10.0	125
PANH103395	10.0	L	3950	5.0-10.0	10.0	125
PANH253410	25.0	R	4111	5.0-10.0	10.0	125
PANH503410	50.0	R	4111	5.0-10.0	10.0	125
PANH104450	100.0	S	4500	5.0-10.0	10.0	125
PANH254450	250.0	S	4500	5.0-10.0	10.0	125

MECHANICAL SPECS

Letter / Dimensions	Std. Part (mm)	
	PANH1	PANH2
A / Dia. of part	3.7 ± 0.5	6.3 ± 0.5
B / Length of tip	15.0 ± 2.0	30.0 ± 4.0
C / Length of leads	152.4 ± 7.0	
d / Length of strip	5.0 ± 7.0	
28AWG Teflon wire		
-55°C – 150°C Operating Temp		



PANT Series - Probe Assembly / threaded tip & hex

DESCRIPTION

- NTC thermistor potted inside aluminum hex screw with straight threads

FEATURES

- Ideal for temperature sensing, measurement and compensation where screwing is necessary
- Fast response, with high accuracy (to $\pm 1\%$)
- Rugged construction
- Cost effective

APPLICATIONS

- Heating & Cooling systems
- HVAC
- Industrial
- Laboratory
- Heat Sinks
- Chassis mounting




ELECTRICAL SPECS

PANT Part Number	R_{25} K Ω	R-T Curve	Beta (K)	Dissipation Constant (mW/ $^{\circ}$ C)	Thermal Time Constant (sec)	Max Power (mW)
PANT501350	0.5	M	3500	6.0	70.0	125
PANT102350	1.0	M	3500	6.0	70.0	125
PANT202395	2.0	L	3950	6.0	70.0	125
PANT302395	3.0	L	3950	6.0	70.0	125
PANT502395	5.0	L	3950	6.0	70.0	125
PANT103395	10.0	L	3950	6.0	70.0	125
PANT253410	25.0	R	4111	6.0	70.0	125
PANT503410	50.0	R	4111	6.0	70.0	125
PANT104450	100.0	S	4500	6.0	70.0	125
PANT254450	250.0	S	4500	6.0	70.0	125

MECHANICAL SPECS

Letter / Dimensions	Std. Part (mm)
A1 / Length of thread	6.0 ± 0.5
A2 / Dia. of thread	3.2 ± 0.5
B / Hex nut thickness	9.3 ± 0.5
C / Length of leads	152.4 ± 7.0
d / Length of strip	5.0 ± 0.5
28AWG Teflon wire	
-55 $^{\circ}$ C – 150 $^{\circ}$ C Operating Temp	

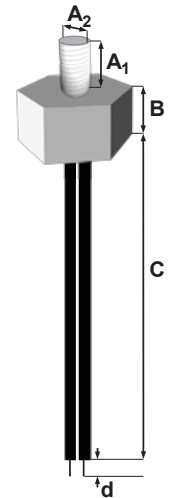

PANW Series - Probe Assembly / threaded metal tubing & hex

DESCRIPTION

- NTC thermistor potted at the tip of durable stainless steel alloy tube, with tapered thread hex screw

FEATURES

- Tapered threads will pull tight for a fluid-tight seal
- Ideal for extreme conditions such as corrosive environments
- Fast response, with high accuracy (to $\pm 1\%$) due to the potting of thermistor at the very tip of the assembly

APPLICATIONS

- Appliance temp measurements such as conventional ovens and microwaves
- Spas, hot tub




ELECTRICAL SPECS

PANW Part Number	R_{25} K Ω	R-T Curve	Beta (K)	Dissipation Constant (mW/ $^{\circ}$ C)	Thermal Time Constant (sec)	Max Power (mW)
PANW501350	0.5	M	3500	10.0	25.0	6.5
PANW102350	1.0	M	3500	10.0	25.0	6.5
PANW202395	2.0	L	3950	10.0	25.0	6.5
PANW302395	3.0	L	3950	10.0	25.0	6.5
PANW502395	5.0	L	3950	10.0	25.0	6.5
PANW103395	10.0	L	3950	10.0	25.0	6.5
PANW253410	25.0	R	4111	10.0	25.0	6.5
PANW503410	50.0	R	4111	10.0	25.0	6.5
PANW104450	100.0	S	4500	10.0	25.0	6.5
PANW254450	250.0	S	4500	10.0	25.0	6.5

MECHANICAL SPECS

Letter / Dimensions	Std. Part (mm)
A1 / Length of tip	37.0 ± 0.5
A2 / Dia. of tip	5.0 ± 0.5
A3 / Length of thread	10.0 ± 0.25
A4 / Dia. of thread	9.5 ± 0.5
B / Hex nut thickness	6.0 ± 0.5
C / Length of leads	152.4 ± 7.0
d / Length of strip	5.0 ± 0.5
28AWG Teflon wire	
-55 $^{\circ}$ C – 150 $^{\circ}$ C Operating Temp	



CT Series - NTC Thermistor with chip

DESCRIPTION


- NTC chip thermistor with or without coating with tinned copper leads

FEATURES

- Wide resistance selection
- Cost effective
- Fast response, with high accuracy (to $\pm 1\%$)

APPLICATIONS

- Refrigeration
- Battery pack
- Amplifier circuits

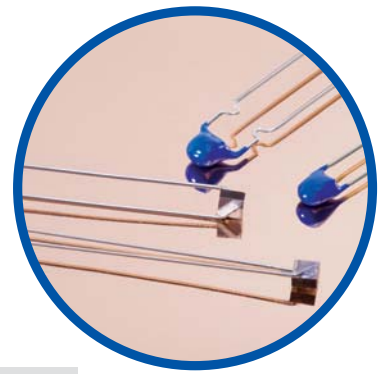


ELECTRICAL SPECS

NT03 Part Number	$R_{25} K\Omega$	R-T Curve	Beta (K)	Dissipation Constant (mW/°C)	Thermal Time Constant (sec)	Max Power (mW)
CT02501350	0.5	M	3500	1.7	10.0	120
CT02102350	1.0	M	3500	1.7	10.0	120
CT02202395	2.0	L	3950	1.7	10.0	120
CT02302395	3.0	L	3950	1.7	10.0	120
CT02502395	5.0	L	3950	1.7	10.0	120
CT02103395	10.0	L	3950	1.7	10.0	120
CT02253410	25.0	R	4111	1.7	10.0	120
CT02503410	50.0	R	4111	1.7	10.0	120
CT02104450	100.0	S	4500	1.7	10.0	120
CT02254450	250.0	S	4500	1.7	10.0	120

MECHANICAL SPECS

Letter / Dimensions	Std. Part (mm)
A1 / Length of part	5.0 ± 0.5
A2 / Dia. of part	2.5 ± 0.5
C / Length of leads	38.0 ± 2.0
S / Lead spacing	3.2 ± 0.5
d / Lead diameter	0.5 ± 0.1
e / Lead spacing	0.5 ± 0.1
b / Coat rundown	2.5 ± 0.3

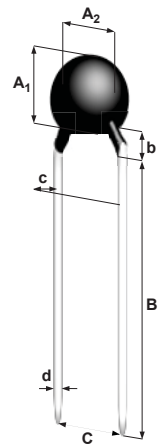

NT Series - NTC Thermistor with disc

DESCRIPTION

- NTC disc thermistor with or without coating with tinned copper leads

FEATURES

- Wide resistance selection
- Cost effective
- Fast response, with high accuracy (to $\pm 1\%$)
- Point or curve matched with interchangeable thermistors

APPLICATIONS

- Automotive electronic
- Industrial electronic
- Heating Systems




ELECTRICAL SPECS

NT03 Part Number	$R_{25} K\Omega$	R-T Curve	Beta (K)	Dissipation Constant (mW/°C)	Thermal Time Constant (sec)	Max Power (mW)
NT03501350	0.5	M	3500	3.5	15.0	250
NT03102350	1.0	M	3500	3.5	15.0	250
NT03302395	3.0	L	3950	3.5	15.0	250
NT03502395	5.0	L	3950	3.5	15.0	250
NT03103395	10.0	L	3950	3.5	15.0	250
NT03153395	15.0	L	3950	3.5	15.0	250
NT03203410	20.0	R	4111	3.5	15.0	250
NT03203410	50.0	R	4111	3.5	15.0	250
NT03503410	100.0	S	4500	3.5	15.0	250
NT05201350	0.2	M	3500	7.5	20.0	450
NT05301350	0.3	M	3500	7.5	20.0	450
NT05501350	0.5	M	3500	7.5	20.0	450
NT05102375	1.0	N	3750	7.5	20.0	450
NT05202395	2.0	L	3950	7.5	20.0	450
NT05502395	5.0	L	3950	7.5	20.0	450
NT05103410	10.0	R	4111	7.5	20.0	450
NT05253410	25.0	R	4111	7.5	20.0	450
NT05503450	50.0	S	4500	7.5	20.0	450
NT05104450	100.0	S	4500	7.5	20.0	450

MECHANICAL SPECS


Letter / Dimensions	Std. Part (mm)	
	NT03	NT05
A / Dia. of part	3.0 ± 0.5	6.0 ± 1.0
t / Thickness	3.0 ± 0.5	3.5 ± 0.5
C / Length of leads	38.0 ± 2.0	38.0 ± 2.0
S / Lead spacing	3.0 ± 0.5	5.0 ± 1.0
e / Lead spacing	0.5 ± 0.1	2.0 ± 0.4
d / Lead diameter	0.5 ± 0.1	0.5 ± 0.1
B / Coat rundown	2.5 ± 0.5	2.5 ± 0.5

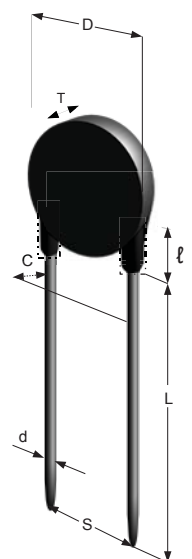

Temperature Coefficients

Temp °C	Material "M"	Material "N"	Material "L"	Material "R"	Material "S"
-40	21.3900	30.7500	33.7400	36.0900	63.2900
-30	12.2200	16.4300	17.8000	18.8200	30.0300
-20	7.2680	9.1450	9.7760	10.2300	14.8700
-10	4.4550	5.2750	5.5700	5.7670	7.6420
0	2.8190	3.1500	3.2790	3.3630	4.0660
10	1.8200	1.9440	1.9980	2.2040	2.2650
20	1.2100	1.2380	1.2520	1.2560	1.3030
25	1.0000	1.0000	1.0000	1.0000	1.0000
30	0.8290	0.8120	0.8038	0.8013	0.7726
35	0.6900	0.6630	0.6499	0.6461	0.6009
40	0.5790	0.5460	0.5282	0.5241	0.4704
45	0.4880	0.4530	0.4316	0.4276	0.3705
50	0.4030	0.3760	0.3545	0.3507	0.2936
55	0.3510	0.3150	0.2949	0.2894	0.2341
60	0.2978	0.2650	0.2465	0.2400	0.1878
65	0.2551	0.2241	0.2070	0.2001	0.1516
70	0.2195	0.1906	0.1747	0.1677	0.1231
75	0.1912	0.1631	0.1481	0.1412	0.1005
80	0.1645	0.1401	0.1261	0.1194	0.0825
85	0.1430	0.1208	0.1077	0.1014	0.0681
90	0.1251	0.1047	0.0924	0.0865	0.0564
95	0.1093	0.0907	0.0796	0.0741	0.0470
100	0.0957	0.0789	0.0688	0.0637	0.0393
105	0.0843	0.0695	0.0597	0.0550	0.0330
110	0.0743	0.0609	0.0521	0.0477	0.0279
115	0.0658	0.054	0.0456	0.0414	0.02362
120	0.0588	0.0479	0.0392	0.0361	0.02009
125	0.0522	0.0428	0.0345	0.0317	0.01715
130	0.0469	0.0381	0.0308	0.0277	0.01469
135	0.042	0.034	0.0268	0.0244	0.01262
140	0.0379	0.0307	0.0236	0.0216	0.01089
145	0.0339	0.0274	0.0209	0.0192	0.009416
150	0.0309	0.0251	0.0186	0.017	0.00817
p	300Ωcm	900Ωcm	2100Ωcm	3000Ωcm	33000Ωcm
Beta	3500 °K	3750 °K	3950 °K	4111 °K	4500 °K

Ametherm Probe Assembly and NTC C/T Curve

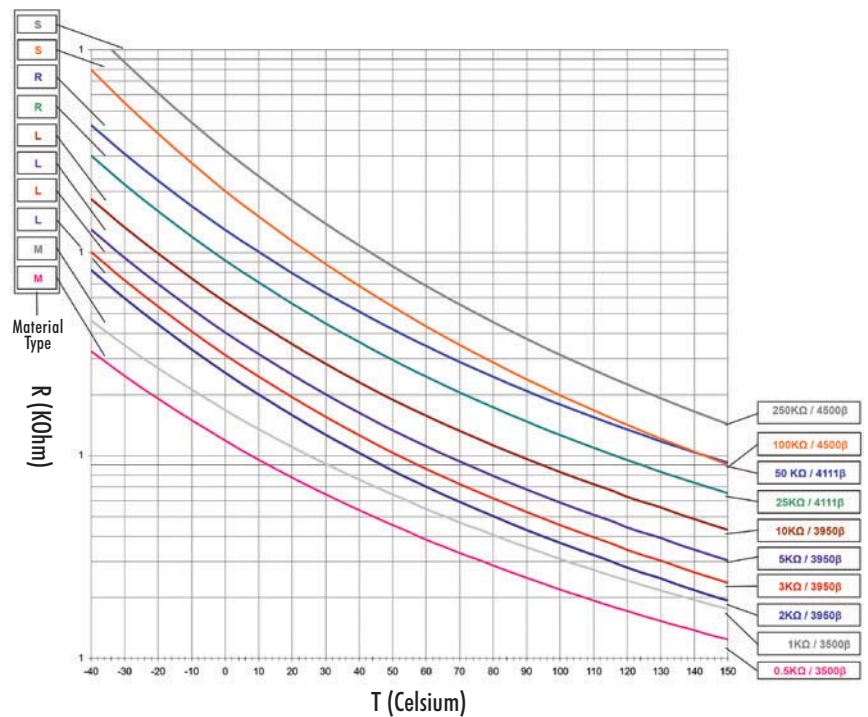

ALSO AVAILABLE THROUGH

US & INTERNATIONAL

Digi-Key www.digikey.com

Mouser www.mouser.com

Newark www.newark.com

EUROPE

Thomatronik www.thomatronik.de

UNITED KINGDOM

Rhopoint Components www.rhopointcomponents.com

CHINA

IBS Electronics www.ibselectronics.com

MALAYSIA

IC Resource www.icresource.com.sg

For a complete list of Ametherm distributors, please visit www.ametherm.com

Contact us today for more information
or to order your free samples.

T: 800-808-2434

775-884-2434

(Outside the US and Canada)

F: 775-884-0670

www.ametherm.com

info@ametherm.com

3111 N. Deer Run Road
Carson City, Nevada 89701 USA

AMETHERM
Circuit Protection Thermistors

