



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Part Number: PANT 103395-401

For Stainless Steel Housing use Part # PANT 103395-401-A

For Brass Housing use Part # PANT 103395-401-B

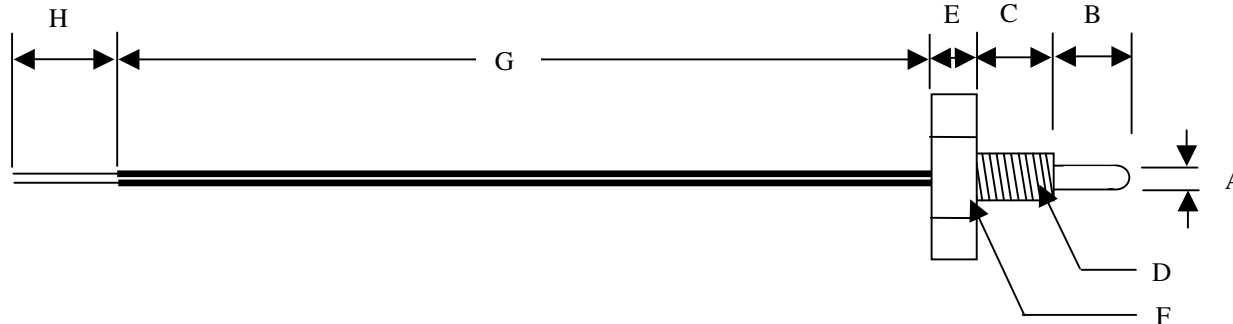

Electrical Specifications

Resistance @ 25° C	10KΩ ± 2%
Temperature Coefficient of Resistance	-4.4% / °C
Operating Temperature Range	-50°C to +150°C
Dissipation Constant	8mW / °C
Thermal Time Constant in oil & Water	6.0 seconds
Thermal time constant in air	127 seconds.
Beta	3990°K

Mechanical Specifications

A	3.0 mm ±0.2mm
B	5.0 mm ± 0.5mm
C	5.5 mm Nom.
D	M6 Thread
Pitch on M6 thread	1.00 mm Nom
E	2.5 mm Nom.
F	14.5 mm Hex
G	194 mm ± 10mm
H	3 mm ± 0.5mm
Lead Wire Gauge	26 AWG Stranded
Lead Insulation	Teflon
Housing Material	304 SS

Rev:	Date:	Changes Made:
0	1/13/16	Issue
1	1/14/16	Added -A for SS housing and -B for Brass housing
2	6/27/17	Increased dimension 'G' from 100mm to 194mm

DRAWN BY: Chad Terry

DATE: 1/13/16

REV: 2

ORIG. Chad T.


APPR: Mehdi S.

AMETHERM
Circuit Protection Thermistors

NTC THERMISTOR PROBE

SHEET 1 of 2

PANT 103395-401

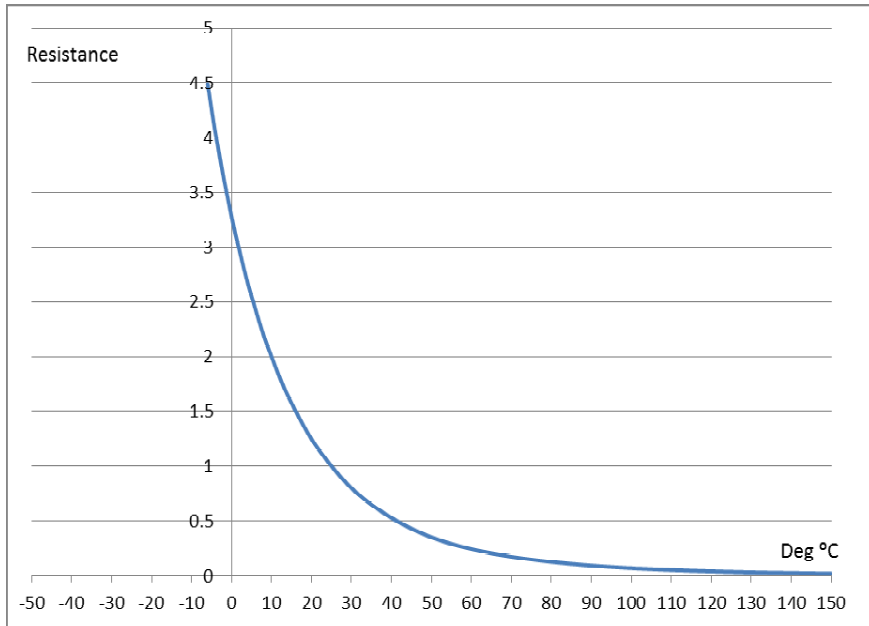

Deg C	R _T /R ₂₅	Deg C	R _T /R ₂₅	Deg C	R _T /R ₂₅	Deg C	R _T /R ₂₅	Deg C	R _T /R ₂₅	Deg C	R _T /R ₂₅
-50	66.9745	-15	7.3476	20	1.2515	55	0.2948	90	0.0924	125	0.0353
-49	62.3986	-14	6.9470	21	1.1960	56	0.2844	91	0.0897	126	0.0344
-48	58.1649	-13	6.5704	22	1.1432	57	0.2743	92	0.0870	127	0.0336
-47	54.2458	-12	6.2164	23	1.0931	58	0.2646	93	0.0845	128	0.0328
-46	50.6159	-11	5.8834	24	1.0454	59	0.2554	94	0.0820	129	0.0320
-45	47.2520	-10	5.5700	25	1.0000	60	0.2465	95	0.0796	130	0.0312
-44	44.1331	-9	5.2751	26	0.9568	61	0.2379	96	0.0773	131	0.0304
-43	41.2398	-8	4.9975	27	0.9157	62	0.2297	97	0.0751	132	0.0297
-42	38.5544	-7	4.7359	28	0.8766	63	0.2219	98	0.0729	133	0.0290
-41	36.0608	-6	4.4895	29	0.8393	64	0.2143	99	0.0708	134	0.0283
-40	33.7440	-5	4.2572	30	0.8038	65	0.2070	100	0.0688	135	0.0277
-39	31.5905	-4	4.0382	31	0.7700	66	0.2001	101	0.0669	136	0.0270
-38	29.5877	-3	3.8317	32	0.7378	67	0.1933	102	0.0650	137	0.0264
-37	27.7243	-2	3.6368	33	0.7071	68	0.1869	103	0.0632	138	0.0258
-36	25.9897	-1	3.4529	34	0.6778	69	0.1807	104	0.0615	139	0.0252
-35	24.3743	0	3.2791	35	0.6498	70	0.1747	105	0.0598	140	0.0246
-34	22.8691	1	3.1165	36	0.6232	71	0.1690	106	0.0581	141	0.0240
-33	21.4660	2	2.9628	37	0.5978	72	0.1634	107	0.0566	142	0.0235
-32	20.1574	3	2.8176	38	0.5735	73	0.1581	108	0.0550	143	0.0230
-31	18.9365	4	2.6802	39	0.5503	74	0.1530	109	0.0535	144	0.0224
-30	17.7969	5	2.5504	40	0.5282	75	0.1481	110	0.0521	145	0.0219
-29	16.7327	6	2.4275	41	0.5071	76	0.1433	111	0.0507	146	0.0215
-28	15.7384	7	2.3111	42	0.4869	77	0.1388	112	0.0494	147	0.0210
-27	14.8091	8	2.2010	43	0.4677	78	0.1344	113	0.0481	148	0.0205
-26	13.9402	9	2.0968	44	0.4492	79	0.1301	114	0.0468	149	0.0201
-25	13.1273	10	1.9980	45	0.4316	80	0.1261	115	0.0456	150	0.0196
-24	12.3666	11	1.9044	46	0.4148	81	0.1221	116	0.0444		
-23	11.6544	12	1.8157	47	0.3987	82	0.1183	117	0.0433		
-22	10.9874	13	1.7315	48	0.3833	83	0.1147	118	0.0422		
-21	10.3624	14	1.6518	49	0.3686	84	0.1111	119	0.0411		
-20	9.7765	15	1.5761	50	0.3545	85	0.1077	120	0.0400		
-19	9.2271	16	1.5043	51	0.3415	86	0.1045	121	0.0390		
-18	8.7118	17	1.4361	52	0.3291	87	0.1013	122	0.0381		
-17	8.2281	18	1.3714	53	0.3172	88	0.0982	123	0.0371		
-16	7.7741	19	1.3099	54	0.3058	89	0.0953	124	0.0362		

Temperature Vs Resistance Curve

The general equation for measurement to reduce error in Temperature by using Stein Hart & Hart equation.


$$T = 1 / a + b (\ln R_T / R_{25}) + c b (\ln R_T / R_{25})^2 + d (\ln R_T / R_{25})^3$$

R _T / R ₂₅ Range	a	b	c	d
3.279 - 66.97	3.357296E-03	2.508334E-04	4.189372 E-06	-6.240867E-08
0.3507-3.363	3.354016E-03	2.541522 E-04	3.730922 E-06	-7.881561E-08
0.0637-0.3507	3.361395E-03	2.582266 E-04	5.885012 E-07	-2.823586 E-08
0.0169-0.0637	3.351295E-03	2.500181 E-04	-1.7255607 E-07	-4.356943 E-08

This equation is for Beta 3950 °K

R @0°C / R@50°C = 9.20

R@25°C / R @125°C = 28.30

DRAWN BY: Chad Terry		
DATE: 1/13/16	REV: 2	
ORIG. C. Terry	APPR: M. Samii	NTC THERMISTOR PROBE
SHEET 2 of 2		PANT 103395-401