



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Specification

Model No : PB-1240-6SA1

Description : 12V 24W AC Adapter

Revision : A

Issued Date : 2013/05/21

Customer Part No. :

LITEON

90, Chien I Rd, Chung Ho city, Taipei Hsien 235, Taiwan

Tel : 886-2-2222-6181 Fax : 886-2-2226-1922

Approve By	Check By	Prepared By
Koson Lu	Tom Hsu	Steven Yeh

Change List			
ECN No	REV	Revision Description	Date
	A	Initial	2013/05/21

Contents

Specification	1
1. Description	5
2. Electrical	5
2.1 Input Voltage (AC ~).....	5
2.2 Input Frequency	5
2.3 Input Current.....	5
2.4 Inrush Current	5
2.5 Hold-Up time	5
2.6 Efficiency	5
2.7 Safety Test	5
2.8 Start Up.....	5
2.9 No load power consumption.....	5
2.10 Rise Time	6
2.11 Over-Shoot and under-shoot	6
2.12 DC output requirement	6
2.14 Output circuit protection	6
2.15 Transient Response	6
3. Environment	6
3.1 Temperature	6
3.2 Humidity.....	6
4. Safety / EMC	7
4.1 Safety.....	7
4.2 EMS	7
4.3 EMI for both Conduction & Radiation	9
5. Reliability	9
5.1 Aluminum Capacitor Lifetime	9
5.2 Burn-in	9
5.3 Vibration Test.....	9
5.4 M.T.B.F	9
5.5 Acoustic	9
6. Mechanical	10
6.1 Physical Size.....	10
6.2 Input connector	10
6.3 Output connector.....	10

6.4 Weight about.....	10
6.4 Flammability.....	10

1. Description

This product is an adapter type AC to DC power transfer device; it is able to provide 24W single dc output with constant voltage source.

2. Electrical

2.1 Input Voltage (AC ~)

- a. From 100-120 Vac Nominal.
- b. From 90-132 Vac Maximum.

2.2 Input Frequency

- a. 50/60 Hz Nominal.
- b. From 47-63 Hz Maximum.

2.3 Input Current

0.6A max at 90Vac and dc output max load.

2.4 Inrush Current

60A max. at DC output at Full-load and 132Vac/60Hz input for Cold Start at 25°C, AC input voltage's phase angle is 90±10° degrees.

2.5 Hold-Up time (main interruption requirement)

16.7 ms minimum at full-load at 90Vac 60Hz AC input.

2.6 Efficiency

Average 25/50/75/100% load power efficiency need to $\geq 82.5\%$ at 115Vac to compliance with CEC level V efficiency requirement.

Test condition will be tested after full load operating for 30min then measure it.

2.7 Safety Test

- a. Leakage current less than 0.25mA.
- b. Hi-pot test: 3000Vac 5mA, 1 minus between Primary to Secondary.
- c. Insulation: 500Vdc, 2Sec between Primary to Secondary circuit, IR shall $\geq 20M\Omega$.

2.8 Start Up

The output voltage shall rise from 0 volt and settle within regulation in less than 2sec, from apply of 115Vac.

2.9 No load power consumption

AC input power P_{in} shall be less than 0.3W at no load and 115Vac, 60Hz condition.

2.10 Rise Time

From 10% to 90% of dc output voltage shall be less then 50msec with the 1000uF capacitive load to that of the product.

2.11 Over-Shoot and under-shoot

Less than 5% of nominal AC input voltage.

2.12 DC output requirement

Vout	+12V	Remark
Vout min	11.4V	Vdc
Vout typ	12.0V	Vdc
Vout max	12.6V	Vdc
Ripple/noise	120	mVpp
Iout max	2	A
Iout min	0	A

Ripple and Noise.

Tested by dc loading side parallel with a 22uF/EC and 0.1uF/Ceramic capacitor and Measured Band-Width with DC-20MHz.

2.14 Output circuit protection

- a. SCP: short circuited protection with auto-recovery function.
- b. OCP: Over current protection with auto recovery function.
Current limit: 3A (max) at 115 Vac.
- c. OVP: Over voltage protection with auto-recovery function.
Tripped voltage will be less than 18Vdc at any duration.

2.15 Transient Response

Dynamic load condition.

Vin (AC)	DC output	Vout Max	Vout Min	I1(A)	I2(A)	I1 time	I2 time	dI/dT
115Vac/60Hz	12V	12.6	11.4	0.2	2	5msec	5msec	0.1A/usec

3. Environment

3.1 Temperature

- a. Operation: 0 to 40 °C for nominal input condition.
- b. Storage: -40 to 70 °C

3.2 Humidity

- a. Operation: 5-95% for nominal input condition.
- b. Storage: 5-95%.

4. Safety / EMC

4.1 Safety

Safety referring Standards
IEC / EN60950-1 2 nd
IEC / EN60065

4.2 EMS

Test Item	Test Specification	IEC Standards	Performance Criteria
ESD	Contact 8KV	61000-4-2	A
ESD	Air 15KV	61000-4-2	A
RS	FR : 80MHz-1.0GHz, Field Strength : 3V/M	61000-4-3	
EFT	2KV on AC power line.	61000-4-4	A
CS	FR: 150KHz-80MHz 3Vrms	61000-4-6	
DIPS	>95% reduction, 0.5 periods	61000-4-11	A
	>30% reduction, 25 Periods		A
	>95% reduction, 250 Periods		B

SURGE	<p>Surge Immunity Tests:</p> <ol style="list-style-type: none"> 1) <u>+/-6kV Combination Wave</u>: 2Ω, 1.2/50μSec ; N=5 strikes at + 6kV & N=5 strikes at -6kV per all noted modes {A, B & C} & all noted reference angles {A, B & C}. 2) <u>+/-6kV Ring Wave</u>: 12Ω; 0.5μS; N=5 strikes at + 6kV & N=5 strikes @ -6kV per all noted modes {A, B & C} & all noted reference angles {A, B & C}. <p><u>Note 1</u>: Modes : A) L to N B) N to PE ; C) L to PE</p> <p><u>Note 2</u>: Reference Angles: A) 0° B) 90° C) 270°</p> <p><u>Note 3</u>: Protective Earth {PE} is defined as DC output ground connection.</p> <p><u>Note 4</u>: PS shall meet spec after test. No permanent damage allowed.</p>	61000-4-5 61000-4-12	

4.3 EMI for both Conduction & Radiation

Referring Standards	Spec / Certified
FCC	Part 15,class B
CISPR	CISPR 22, class B

5. Reliability

5.1 Aluminum Capacitor Lifetime

61320 hours at full load & 90VAC, ambient temperature 40°C .

5.2 Burn-in

100% Burn-In with 80-100% loading & 30-40°C Environment temperature.

5.3 Vibration Test

Vibration of 1.25G peak, 5Hz-55Hz, constant acceleration swept from 0-60Hz with a two minute sweep time, and cycled from 60 minutes per each of three axes.

5.4 M.T.B.F

Prediction: Minimum 100,000 hours @ 25 °C SR-332

5.5 Acoustic

The power supply must have a maximum sound pressure noise level of less than 25 dB at a distance of 1 meter under all operating conditions.

6. Mechanical

6.1 Physical Size

Plastic case size 112x52x31mm

NOTES: UNLESS OTHERWISE SPECIFIED,

1. ALL DIMENSIONS ARE IN mm.

TOLERANCES TO BE ± 0.25 mm.

2. PARTS SPECIFIED AS FOLLOWS:

2-1. ENCLOSURE:

MATERIAL: SABIC LEXAN 945 (GG),

V-0 RATED FLAMMABILITY.

COLOR: BLACK.

TEXTURE: MT-11020 (MAT).

2-2. AC RECEPTACLE:


IEC 60320 CERTIFIED, 2-POLE.

2-3. DC OUTPUT:

PLUG: BLACK DIELECTRIC BARREL TYPE.

CABLE: UL 2468 #20 AWG-2C.

COLOR: BLACK.

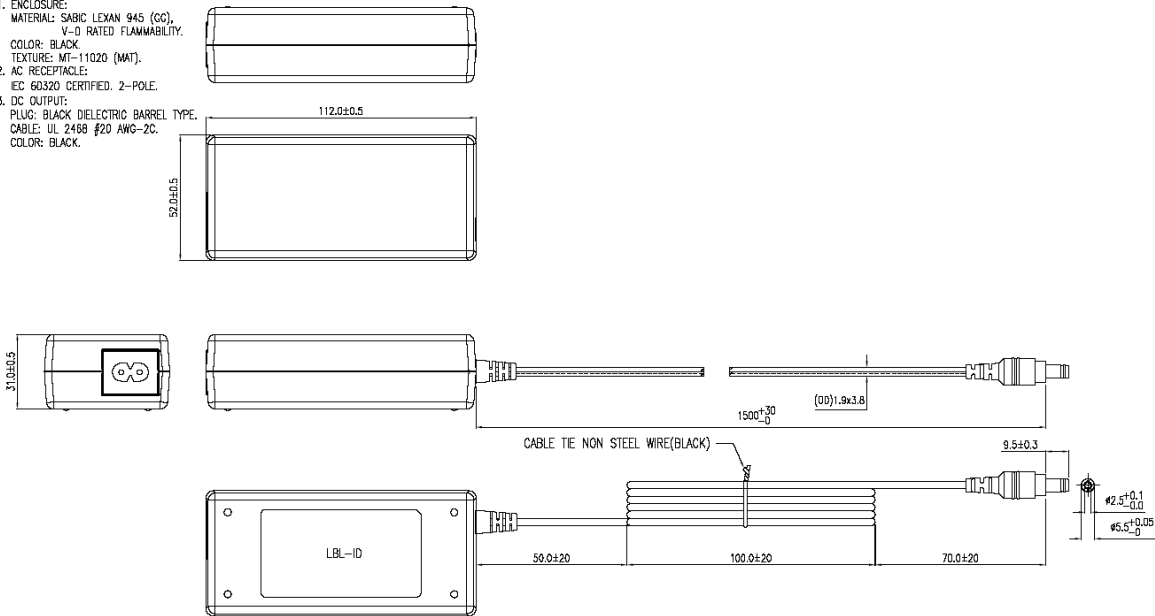

Outline Drawing

6.2 Input connector

UL Pin.

6.3 Output connector

DC output with traditional barrel 180 degrees angle type 5.5 x 2.5 x 9.5mm, 1.5M, UL2468
20AWG cable

6.4 Weight about

160g +/-10 g.

6.4 Flammability

must meet 94V-0 and VW-1.